


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A5	ECR-18-009174	13JUN18	L.P	T.D

NOTE:


- 1.HOUSING MATERIAL,NYLON 6/66,GLASS-FIBRE.
UL94V-0.
- 2.GWT 750°C VERSION,ACCORDING TO IEC 60335-1.
- 3.CONTACT MATERIAL,TIN PLATED BRASS.

SIDE VIEW

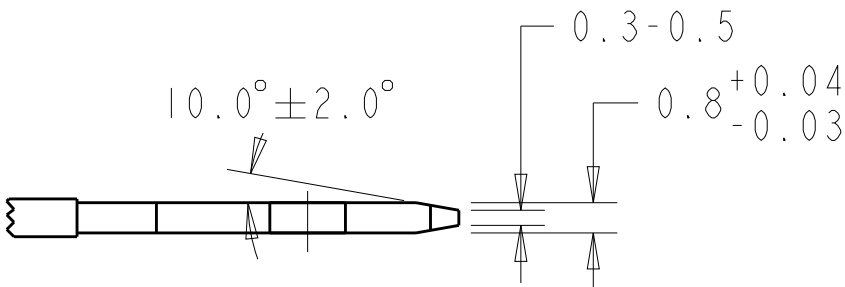

Necessary space
for housing
to be inserted
up to this line


TOP VIEW

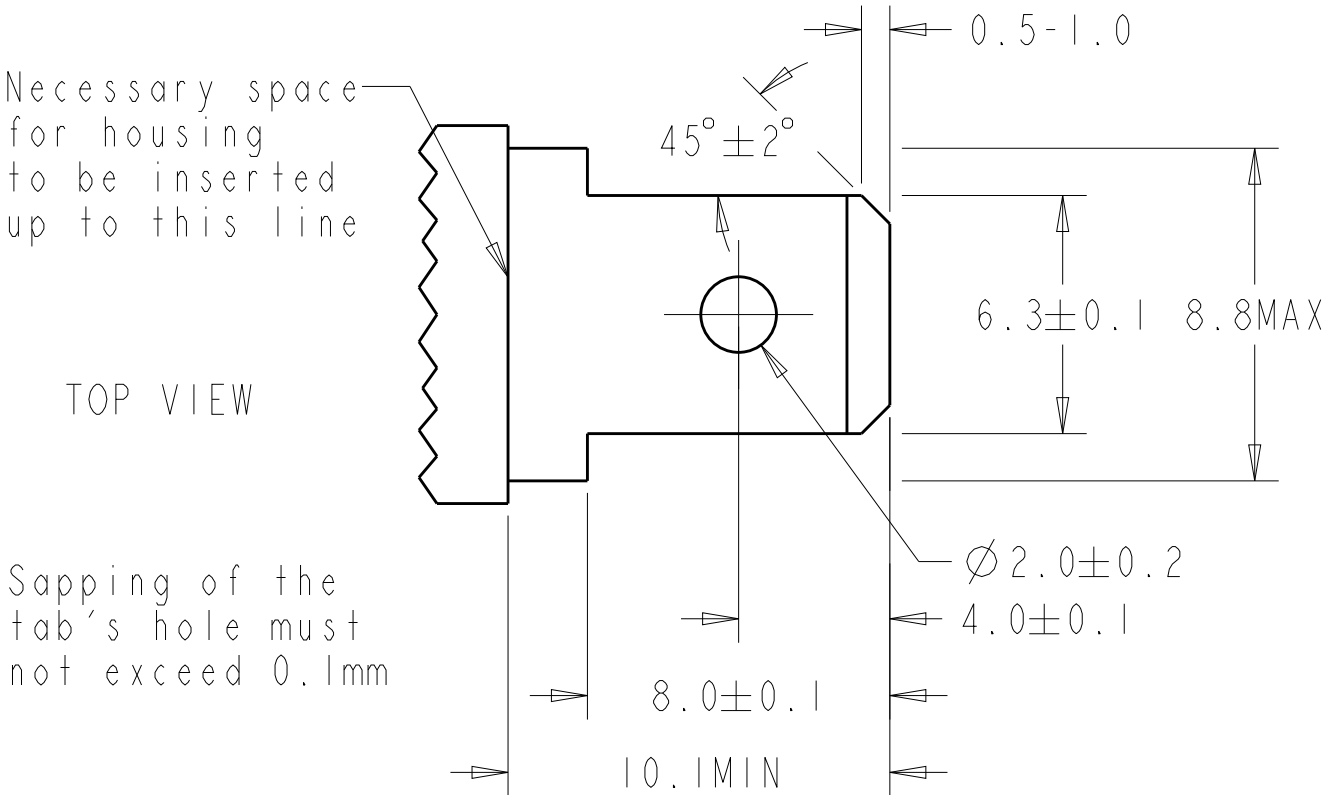

Sapping of the
tab's hole must
not exceed 0.1mm


TYPE A (When using tab shoulder for butting)

SIDE VIEW

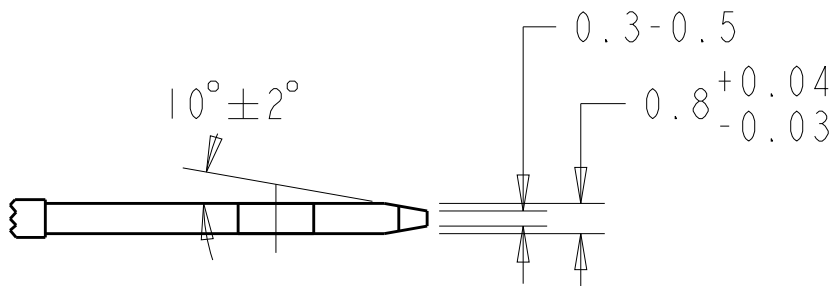




Butting surface
of housing

TOP VIEW

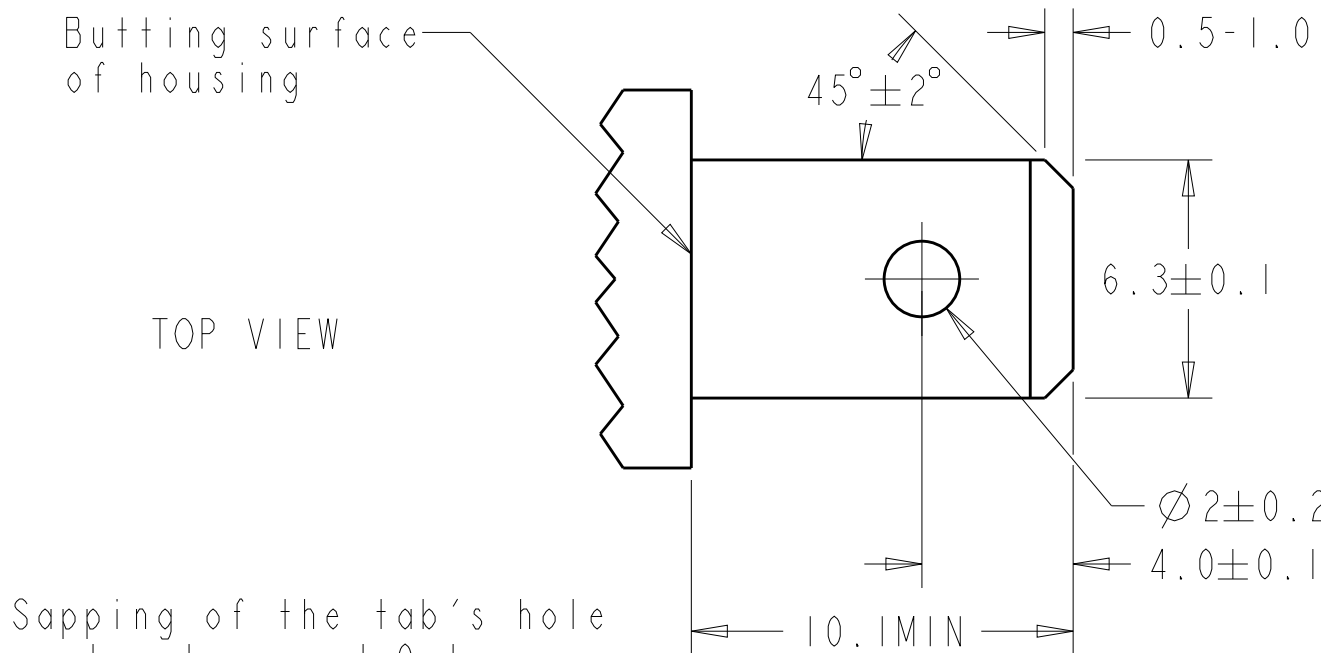


Sapping of the tab's hole
must not exceed 0.1mm

TYPE B(When using resin, etc. for butting)

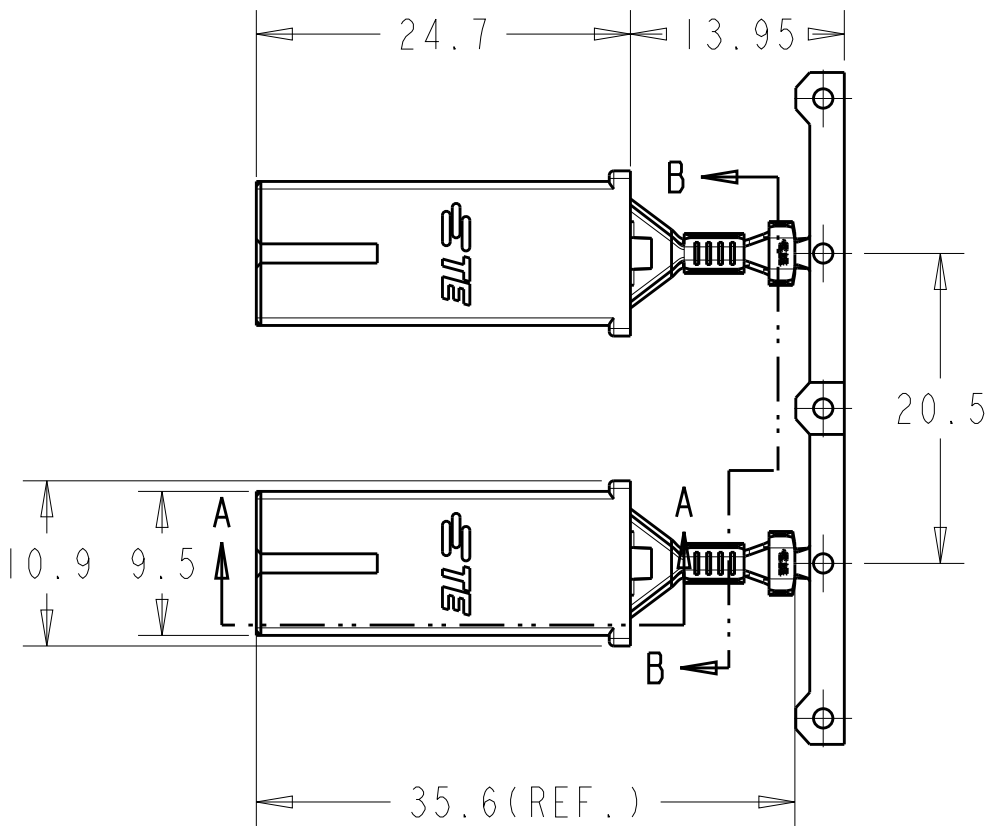

SECTION B-B
SCALE 4:1

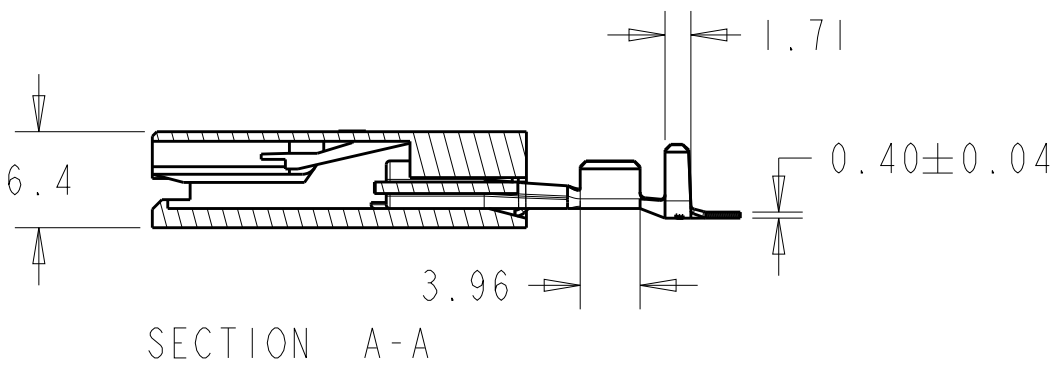

SECTION A-A

5.8REF.	6.2	4.5REF.	4.5	3.40-5.08	14-12	2299282-3
4.9REF.	5.3	3.9REF.	3.5	3.0-4.0	18-14	2299282-2
4.9REF.	4.2	3.1REF.	2.6	2.2-3.0	22-18	2299282-1
DIM D	DIM C	DIM B	DIM A	INSULATION(mm)	WIRE SIZE(AWG)	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	14NOV2016	TE Connectivity	
DIMENSIONS:			CHK	14NOV2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD	14NOV2016		
mm			PRODUCT SPEC	108-106262		
MATERIAL			APPLICATION SPEC	114-106262	SIZE	A2
FINISH			WEIGHT	-	CAGE CODE	-
CUSTOMER DRAWING			SCALE	5:1	DRAWING NO	C-2299282
			SHEET	1	OF	1
			REV	A5	RESTRICTED TO	