


AD7015-9 SERIES

External Dimensions

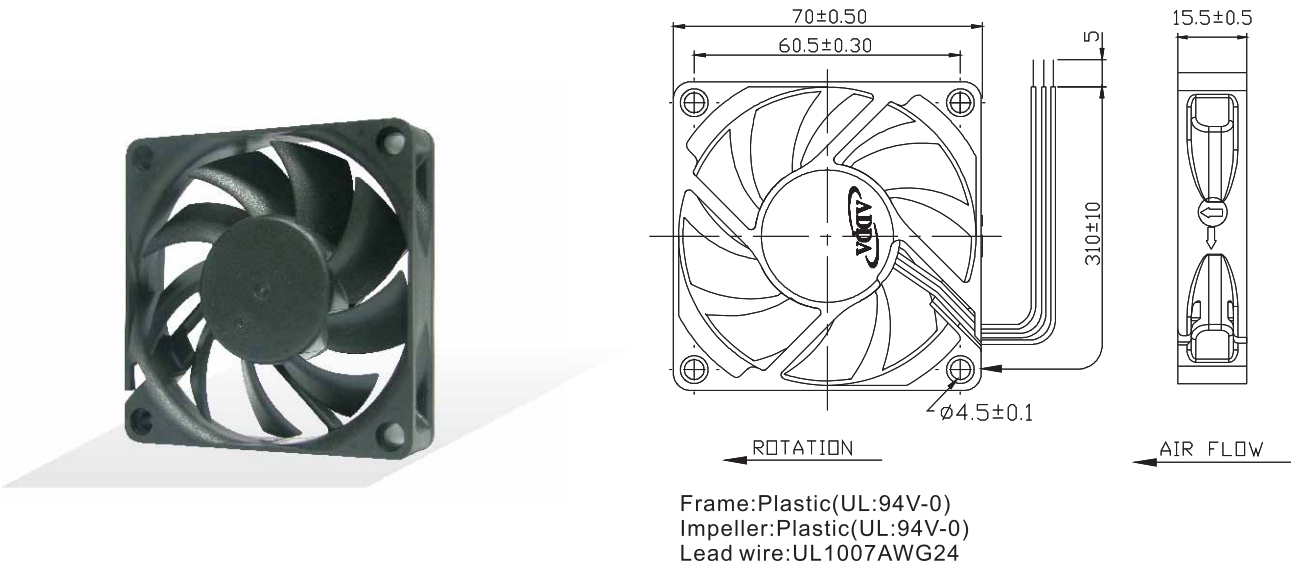

Specifications(Nominal)


*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
70x70x15	AD0712DB-D91	◎ ※ ●	12	0.05	0.60	2500	0.430	15.200	0.065	1.615	25.0	50.0
	AD0712LB-D91	◎ ※ ●	12	0.07	0.72	3000	0.523	18.490	0.090	2.286	29.8	
	AD0712MB-D91	◎ ※ ●	12	0.11	1.32	3700	0.665	23.500	0.140	3.556	35.5	
	AD0712HB-D91	◎ ※ ●	12	0.18	2.16	4600	0.837	29.600	0.210	5.334	43.4	
	AD0712UB-D91	◎ ※ ●	12	0.26	3.12	5500	1.010	35.700	0.290	7.366	48.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

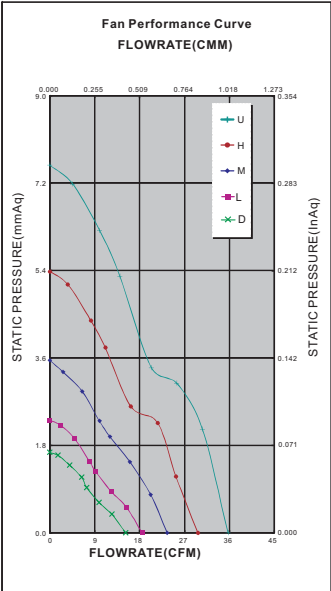

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							

*Safety approvals

✓	✓		✓	✓