

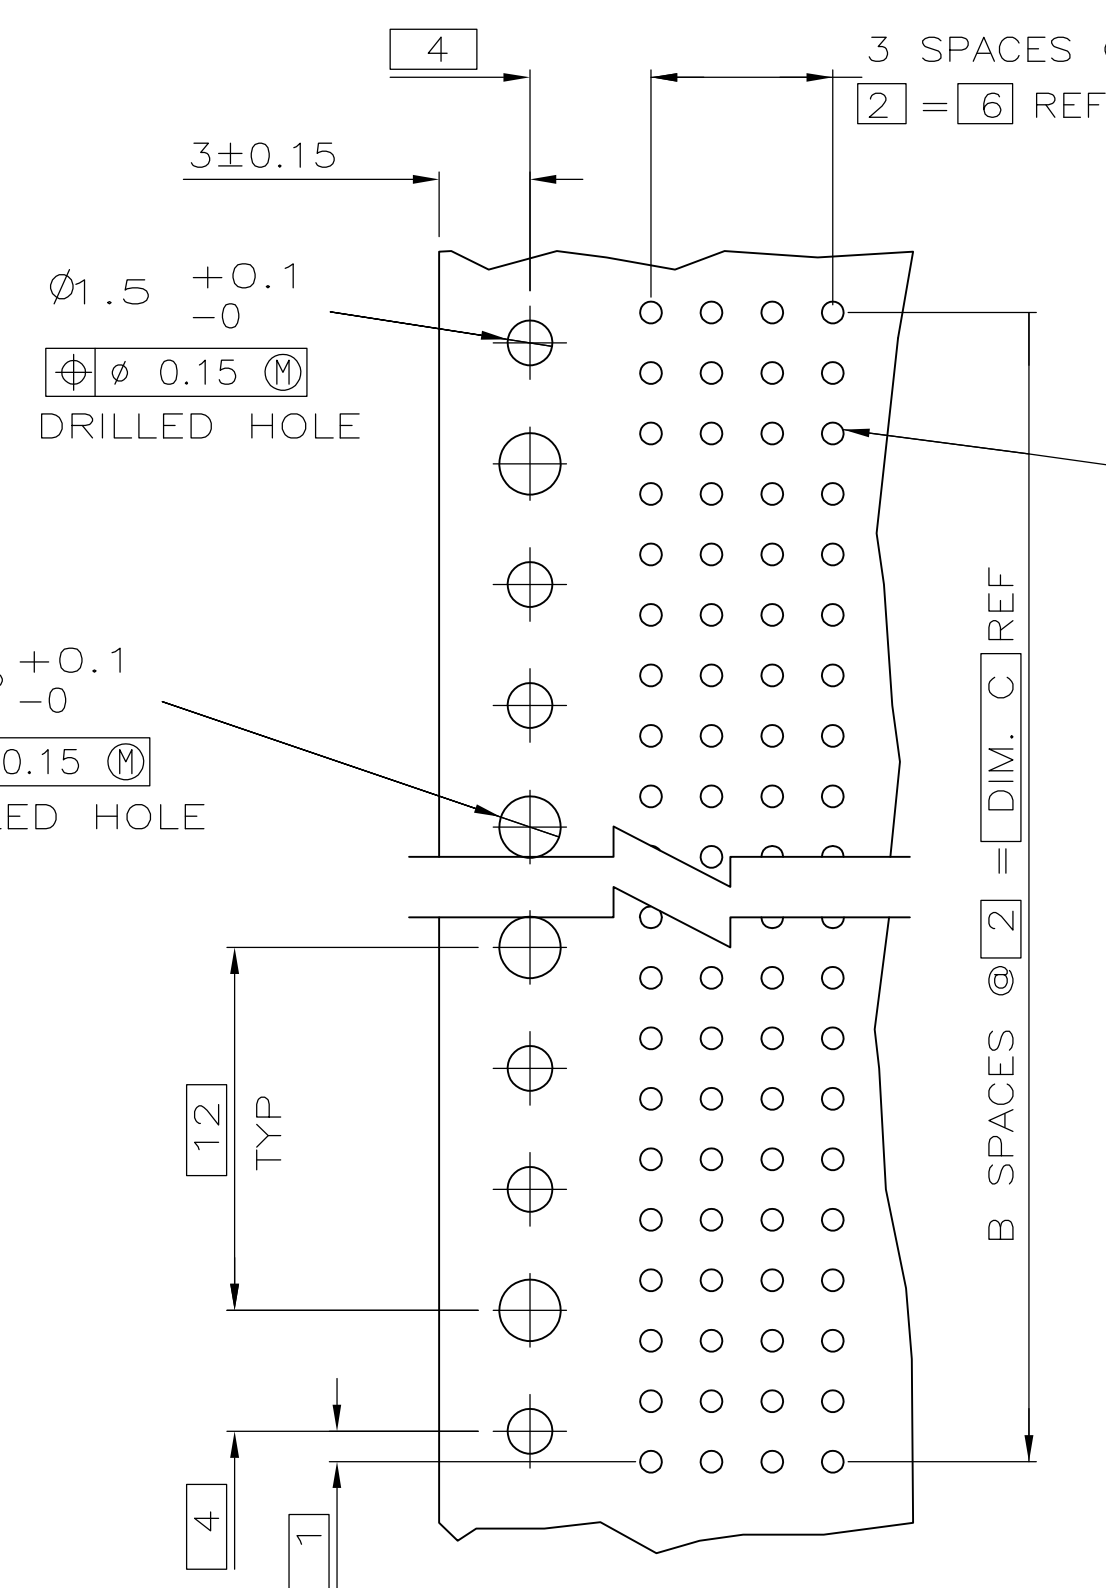


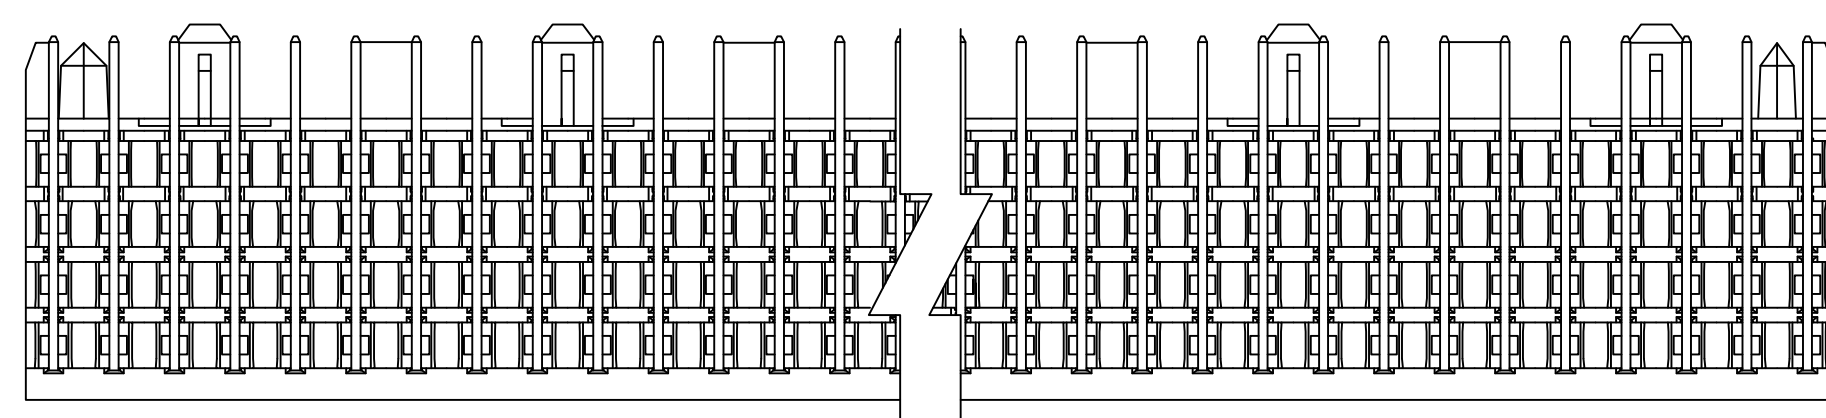


- ① HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
COLOR: NATURAL.
- ② CONTACT MATERIAL: PHOSPHOR-BRONZE.
- ③ CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT) -
0.00127 MIN. NICKEL
ON MATING SURFACES-
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT
ON LEADS-
0.00381 MIN. TIN-LEAD, OVER UNDERPLATE
LUBRICATION (ENTIRE CONTACT)
SURFACE CONDITIONER PER AMP SPEC. 112-1002 AFTER PLATING.
- ④ PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED
APPROXIMATELY AS SHOWN.
- ⑤ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

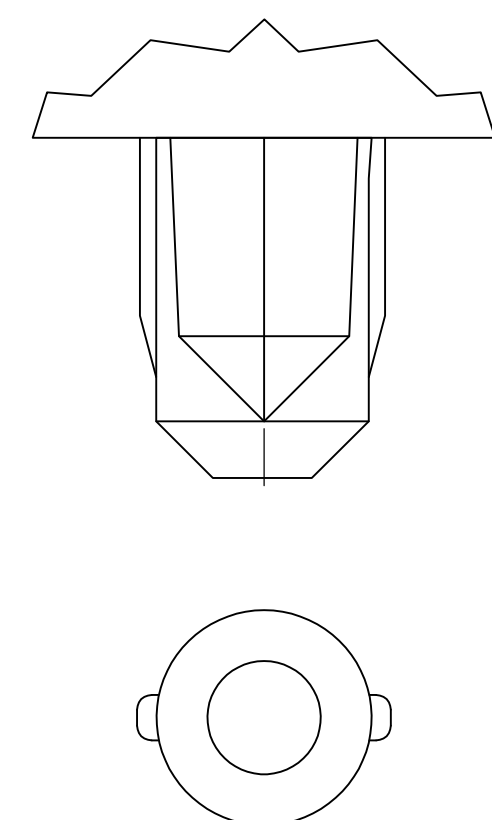

TYPICAL COLD HOLD
FOR ALL ASSEMBLIES

	NO	34	17	35.88		72	1-536507-1
OBSOLETE	NO	130	65	131.88		264	1-536507-0
 OBSOLETE	NO	106	53	107.88		216	536507-9
	NO	118	59	119.88		240	536507-8
	NO	70	35	71.88		144	536507-7
	NO	58	29	59.88		120	536507-6
OBSOLETE	NO	82	41	83.88		168	536507-5
	NO	94	47	95.88		192	536507-4
	NO	46	23	47.88		96	536507-3
	NO	22	11	23.88		48	536507-2
	YES	10	5	11.88		24	536507-1
	POSITIONING PEGS	C	B	A	FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08/06/92 D.R.BENDER / BG CHK 01/26/93 S. HEADER		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± .13 3 PLC ± — 4 PLC ± — ANGLES ± —		NAME RECEPTACLE ASSEMBLY, SIGNAL MODULE, Z-PACK 2mm FB, 4 ROW, 2.73mm LEAD LENGTH	
		APVD D. PROFILES PRODUCT SPEC — APPLICATION SPEC —		SIZE CASE CODE DRAWING NO A1 00779 C-536507	
MATERIAL 		FINISH 		RESTRICTED TO —	
WEIGHT —				CUSTOMER DRAWING	
				SCALE 4:1 SHEET 1 OF 1 REV AA4	