

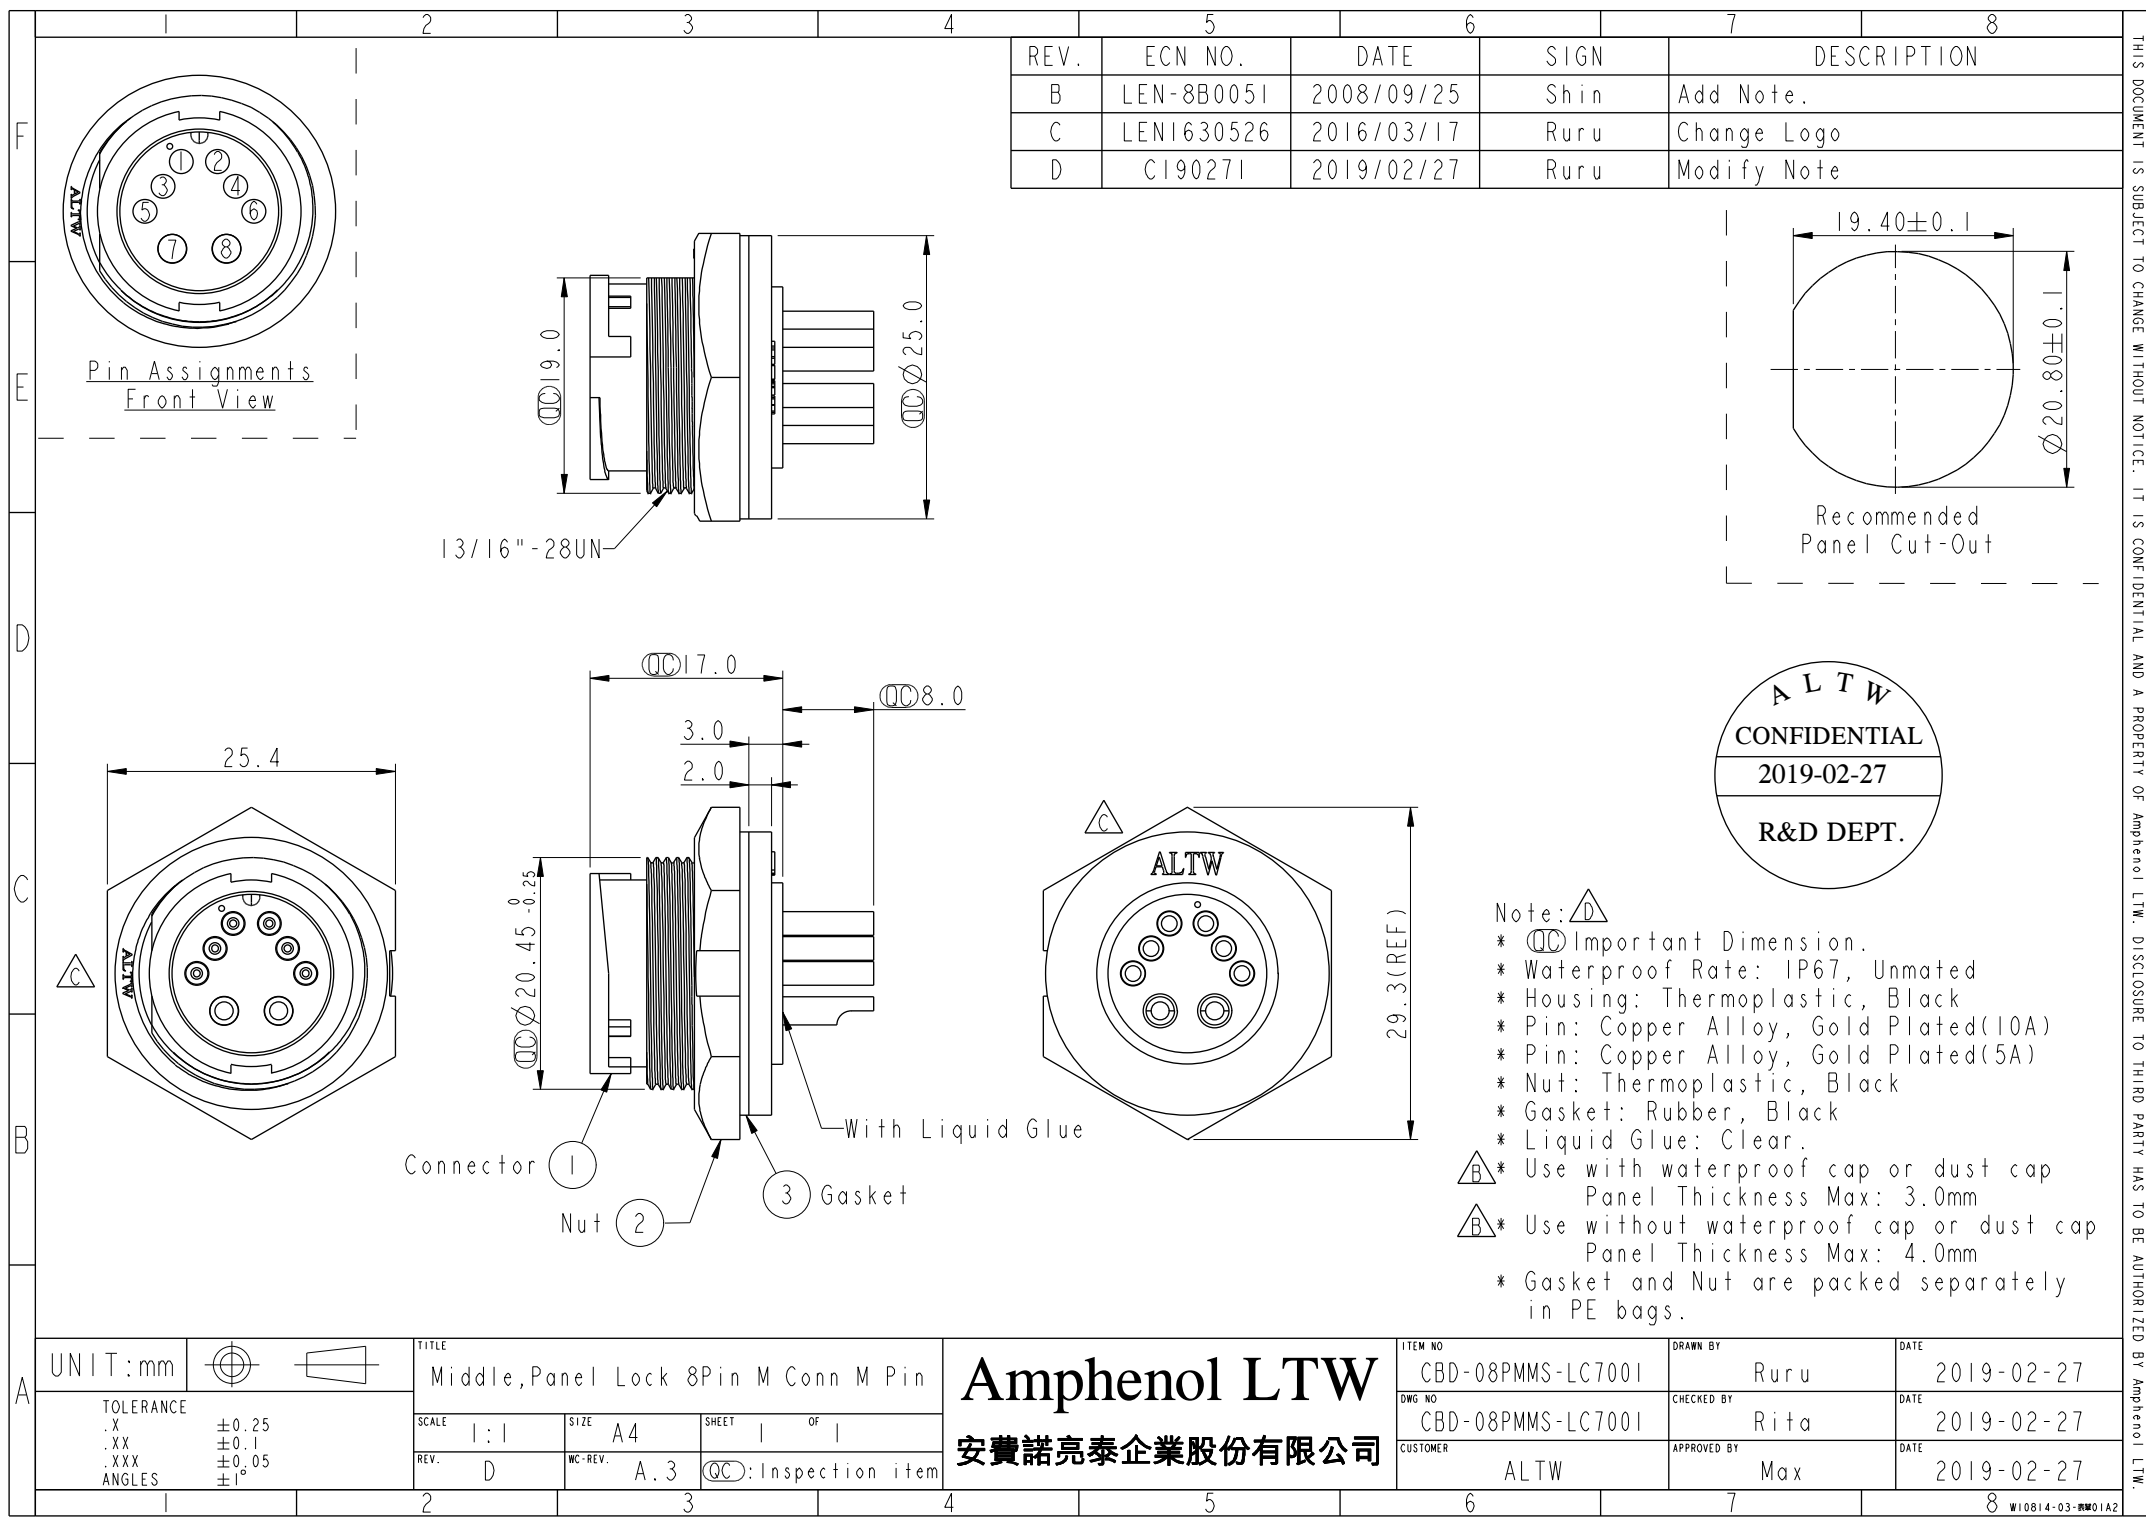




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0051	2008/09/25	Shin	Add Note.
C	LEN1630526	2016/03/17	Ruru	Change Logo
D	CI90271	2019/02/27	Ruru	Modify Note

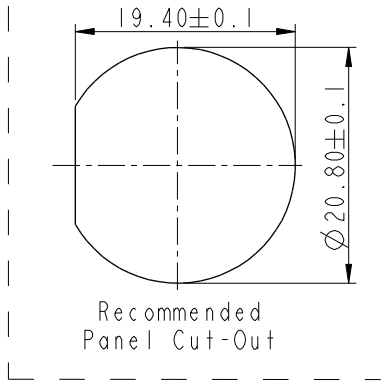

Note:  Important Dimension.

- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated(10A)
- * Pin: Copper Alloy, Gold Plated(5A)
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- * Liquid Glue: Clear.

 * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm

 * Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm

* Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE	
TOLERANCE		Middle,Panel Lock 8Pin M Conn M Pin	
.X	±0.25	SCALE	1:1
.XX	±0.1	SIZE	A4
.XXX	±0.05	SHEET	1 OF 1
ANGLES	±1°	REV.	D
		WC-REV.	A.3
		QC: Inspection item	

Amphenol LTW		ITEM NO	CBD-08PMMS-LC7001	DRAWN BY	Ruru	DATE	2019-02-27
安費諾亮泰企業股份有限公司		DWG NO	CBD-08PMMS-LC7001	CHECKED BY	Rita	DATE	2019-02-27
		CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.