

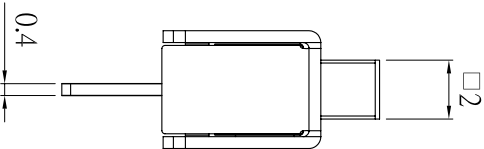
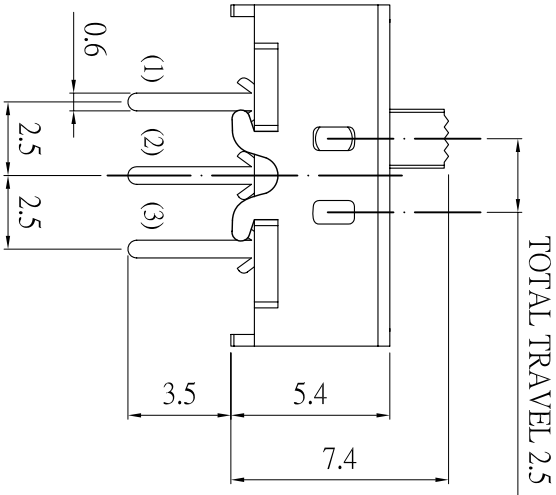



DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

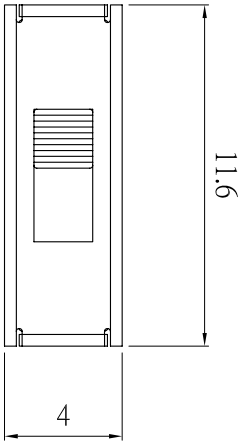

CIRCUIT DIAGRAMS



PCB LAYOUT



1. RATING : 0.6A , 15 VDC .
2. CONTACT RESISTANCE : 50 mΩ MAX .1.5V DC ; 100mA .
3. INSULATION RESISTANCE : 100 MΩ MIN .500 V DC .
4. OPERATING TEMPERATURE : -20°C ~ 70°C .
5. OPERATING FORCE : 250±100 gf .
6. OPERATING LIFE : 10,000 cycles .
7. TIMING: NON-SHORTING

△			DATE	2011/06/15	UNIT	mm	MODE	SLIDE SWITCH
△			APPROVAL	KAVEN	SCALE	1 : 1	PART	SS003-P12NAA
△					VIEW		2D FILE NAME	SS003-P12NAA
	DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION				
					VER.	01	3D FILE NAME	