
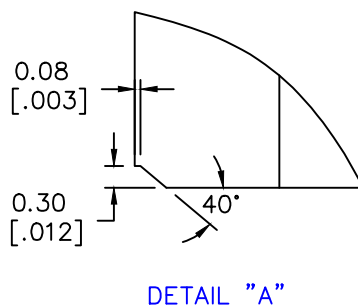


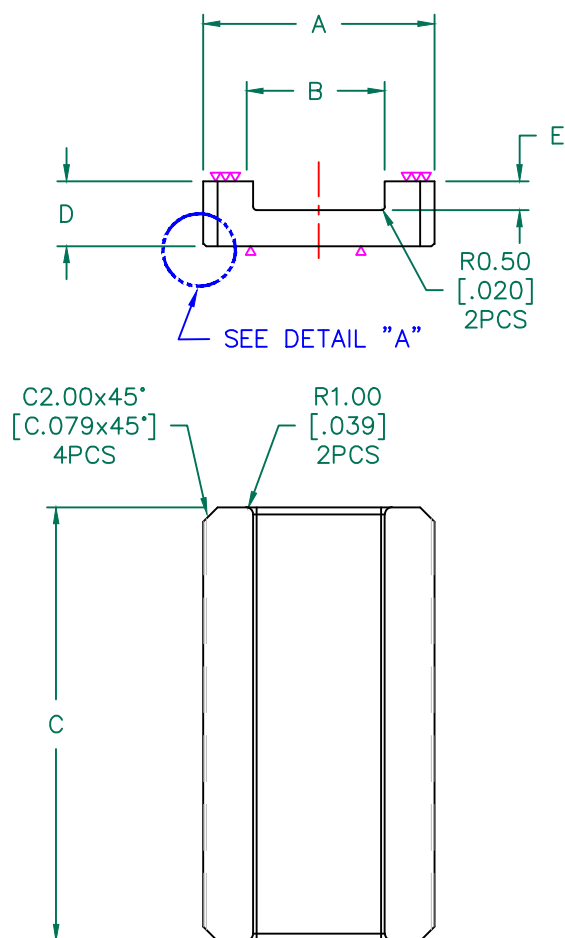

NET IMPEDANCE (Z)			
Frequency	0.5 MHz	1 MHz	5 MHz
Nominal (REF)	65 Ω	127 Ω	87 Ω
Minimum	48 Ω	95 Ω	65 Ω

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	32.00 [1.260]	+	0.60 [.024]
B	18.20 [.717]	+	0.40 [.016]
C	60.00 [2.362]	+	1.00 [.039]
D	9.00 [.354]	+	0.20 [.008]
E	4.00 [.157]	+	0.25 [.010]

WEIGHT/1000 62.47 kgs [137.70 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.
2. THE CONTACT SURFACE NEED TO BE POLISHED.

RoHS

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
A	ORIGINAL DRAFT	09/15/17	Jcai	PROJECT/PART NUMBER: 35U1260-120			
				DATE: 09/15/17	SCALE: 1 : 1	MATERIAL: Ferrite	
				CAD # 35U1260-120-A	TOOL # U1260		

Laird

REV A PART TYPE: CNZ CORE DRAWN BY: Jcai