

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [75783-0307](#)  
**Status:** **Active**  
**Overview:** iPass™ Connector System  
**Description:** 0.80mm Pitch, iPass™ I/O SMT Receptacle, Right Angle, Internal Assembly with Shell, 68 Circuit, 0.38μm Gold (Au), Retention Option, Tail Length 1.96mm, Left Key

**Documents:**  
[3D Model](#)  
[Drawing \(PDF\)](#)  
[Product Specification PS-75783-001 \(PDF\)](#)  
[Application Specification AS-75783-001 \(PDF\)](#)  
[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**


CSA LR19980  
UL E29179

**General**

Product Family I/O Connectors  
Series [75783](#)  
Application Wire-to-Board  
Comments Positive or passive latching cable available  
Component Type Receptacle  
Overview [iPass™ Connector System](#)  
Product Name iPass™, PCI Express\*, SAS, Serial ATA  
Type N/A  
UPC 822350092654

**Physical**

Circuits (Loaded) 68  
Circuits (maximum) 68  
Color - Resin Black  
Durability (mating cycles max) 50  
Flammability 94V-0  
Gender Female  
Keying to Mating Part Yes  
Lock to Mating Part None  
Material - Metal Copper-Nickel-Zinc, High Performance Alloy (HPA)  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
Net Weight 4.661/g  
Number of Rows 2  
Orientation Right Angle  
PC Tail Length 1.96mm  
PCB Locator Yes  
PCB Retention Yes  
PCB Thickness - Recommended 1.57mm  
Packaging Type Embossed Tape on Reel  
Panel Mount No  
Pitch - Mating Interface 0.80mm  
Pitch - Termination Interface 0.80mm  
Plating min - Mating 0.381μm  
Plating min - Termination 2.540μm  
Polarized to Mating Part Yes  
Ports 1  
Surface Mount Compatible (SMC) Yes  
Temperature Range - Operating -40°C to +80°C

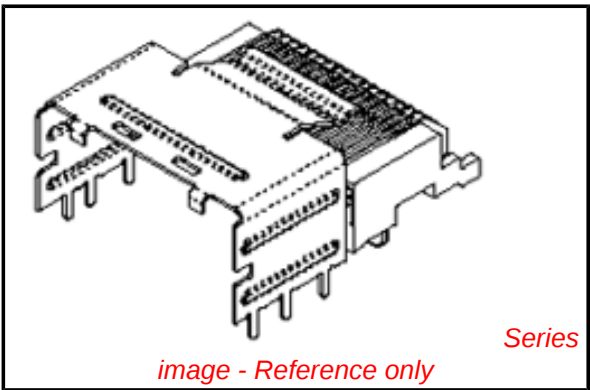

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
**Contains SVHC: No**  
**Low-Halogen Status**  
**Low-Halogen**



**Need more information on product environmental compliance?**  
Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[75783Series](#)

**Use With**  
iPass™ Cable Assemblies, [79575](#) , [79576](#) , [74562](#) , [74563](#) , [79536](#) , [74573](#) , [74569](#) , [74586](#)

|                              |                                          |
|------------------------------|------------------------------------------|
| Termination Interface: Style | Surface Mount, Through Hole - Kinked Pin |
| Waterproof / Dustproof       | No                                       |
| Wire Insulation Diameter     | N/A                                      |
| Wire Size AWG                | N/A                                      |

**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.5A            |
| Grounding to Panel            | None            |
| Voltage - Maximum             | 30V AC (RMS)/DC |

**Solder Process Data**

|                              |                           |
|------------------------------|---------------------------|
| Lead-free Process Capability | Reflow Capable (SMT only) |
| Process Temperature max. C   | 260                       |

**Material Info**

**Reference - Drawing Numbers**

|                           |              |
|---------------------------|--------------|
| Application Specification | AS-75783-001 |
| Electrical Model Document | EE-75586-001 |
| Product Specification     | PS-75783-001 |
| S-Parameter Model         | SP-75586-001 |
| Sales Drawing             | SD-75783-001 |

This document was generated on 06/11/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**