




RECOMMENDED PANEL CUTOUT
EMPFOHLENER FRONTPLATTEN-AUSSCHNITT

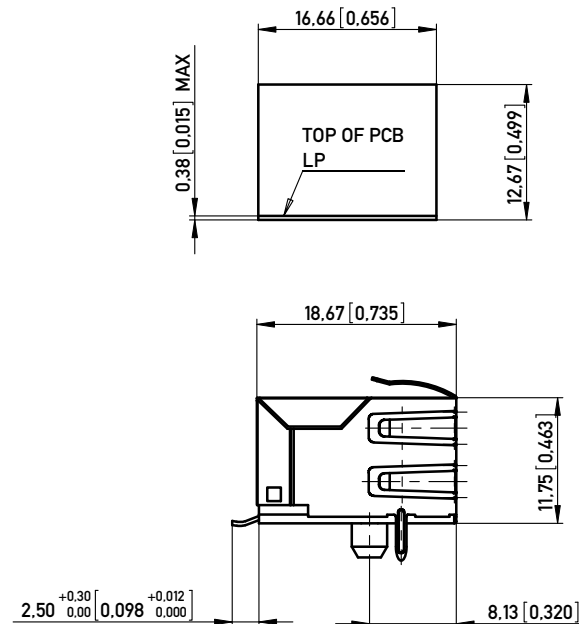

RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)
EMPFOHLENES LEITERPLATTEN-LAYOUT (BESTUECKUNGSSEITE)
TOL. ± 0.05 [0.002] UNLESS NOTED

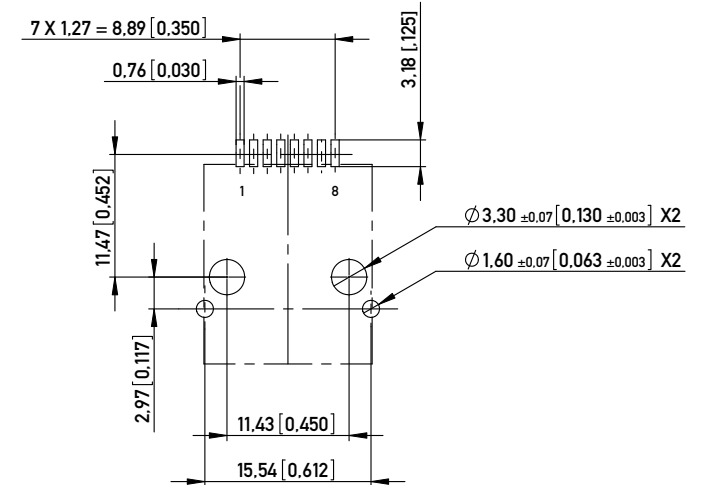

IMPROVED CONTACT DESIGN
(PRE BEND)



Technical specifications

Materials & Finish

	Standard applic.	Value
Insulation body	Standard description	PA46 30%
Contact material	Standard description	C5210 (acc. JIS)
Contact finish, mating zone	Thickness of plating	30 μ m Au over 50 μ m Ni
Contact finish termination zone	Thickness of plating	80 μ m matte Sn over 50 μ m Ni
Shell/shield material	Standard description	C2680 (acc. JIS)
Shell/shield plating	Thickness of plating	50 μ m Ni

Assembly process

Packaging	Tray
Solder temperature	260°C at 3-5s
Suitable assembly process	reflow

Approvals

UL insulation body	UL 94	V0
UL File No.		E145613
RoHS compliant		Yes

Test Data

Mechanical properties

Insertion/withdrawal force	IEC 603-7	max. 20 N
Mechanical operations	IEC 512-5, 9a	min. 1.000
Effectiveness of connector coupling device	IEC 512-8, 15f	50 N

Electrical properties

Creepage / clearance distances

a) Contact - contact	IEC 807-3	0.52 mm
b) Contact - shell	IEC 807-3	min. 1.0 mm

Voltage proof (Dielectric Withstand Voltage)

a) Contact - contact	IEC 512-2, 4a	min. 1.000 V AC/DC
b) Contact - shell/testpanel	IEC 512-2, 4a	min. 1.500 V AC/DC
Current carrying capacity	IEC 512-3, 5b	1.5 A @ 25°C
Contact resistance	IEC 512-2, 2a	max. 30 mOhm
Insulation resistance	IEC 512-2, 3a	min. 500 MOhm


Environmental properties

Operation temperature	-40°C to +85°C
-----------------------	----------------

NOTE 1: WITH PEGS, SIDE GROUNDING PINS AND SMT TERMINALS

NOTE 2: PANEL GROUND FLANGES BOTH SIDES AND TOP (GF5)

NOTE 3: RoHS COMPLIANT



1:1

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:				Tolerances Fraction Decimals Angles X				Scale 2:1					
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation MOD JACK - MJLS 8P8C, 1X1 SMT							
				c		21.10.2010				www.ERNI.com			
Index		Date						Class		MJ		A3	

ERNI www.ERNI.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[133288](#)