



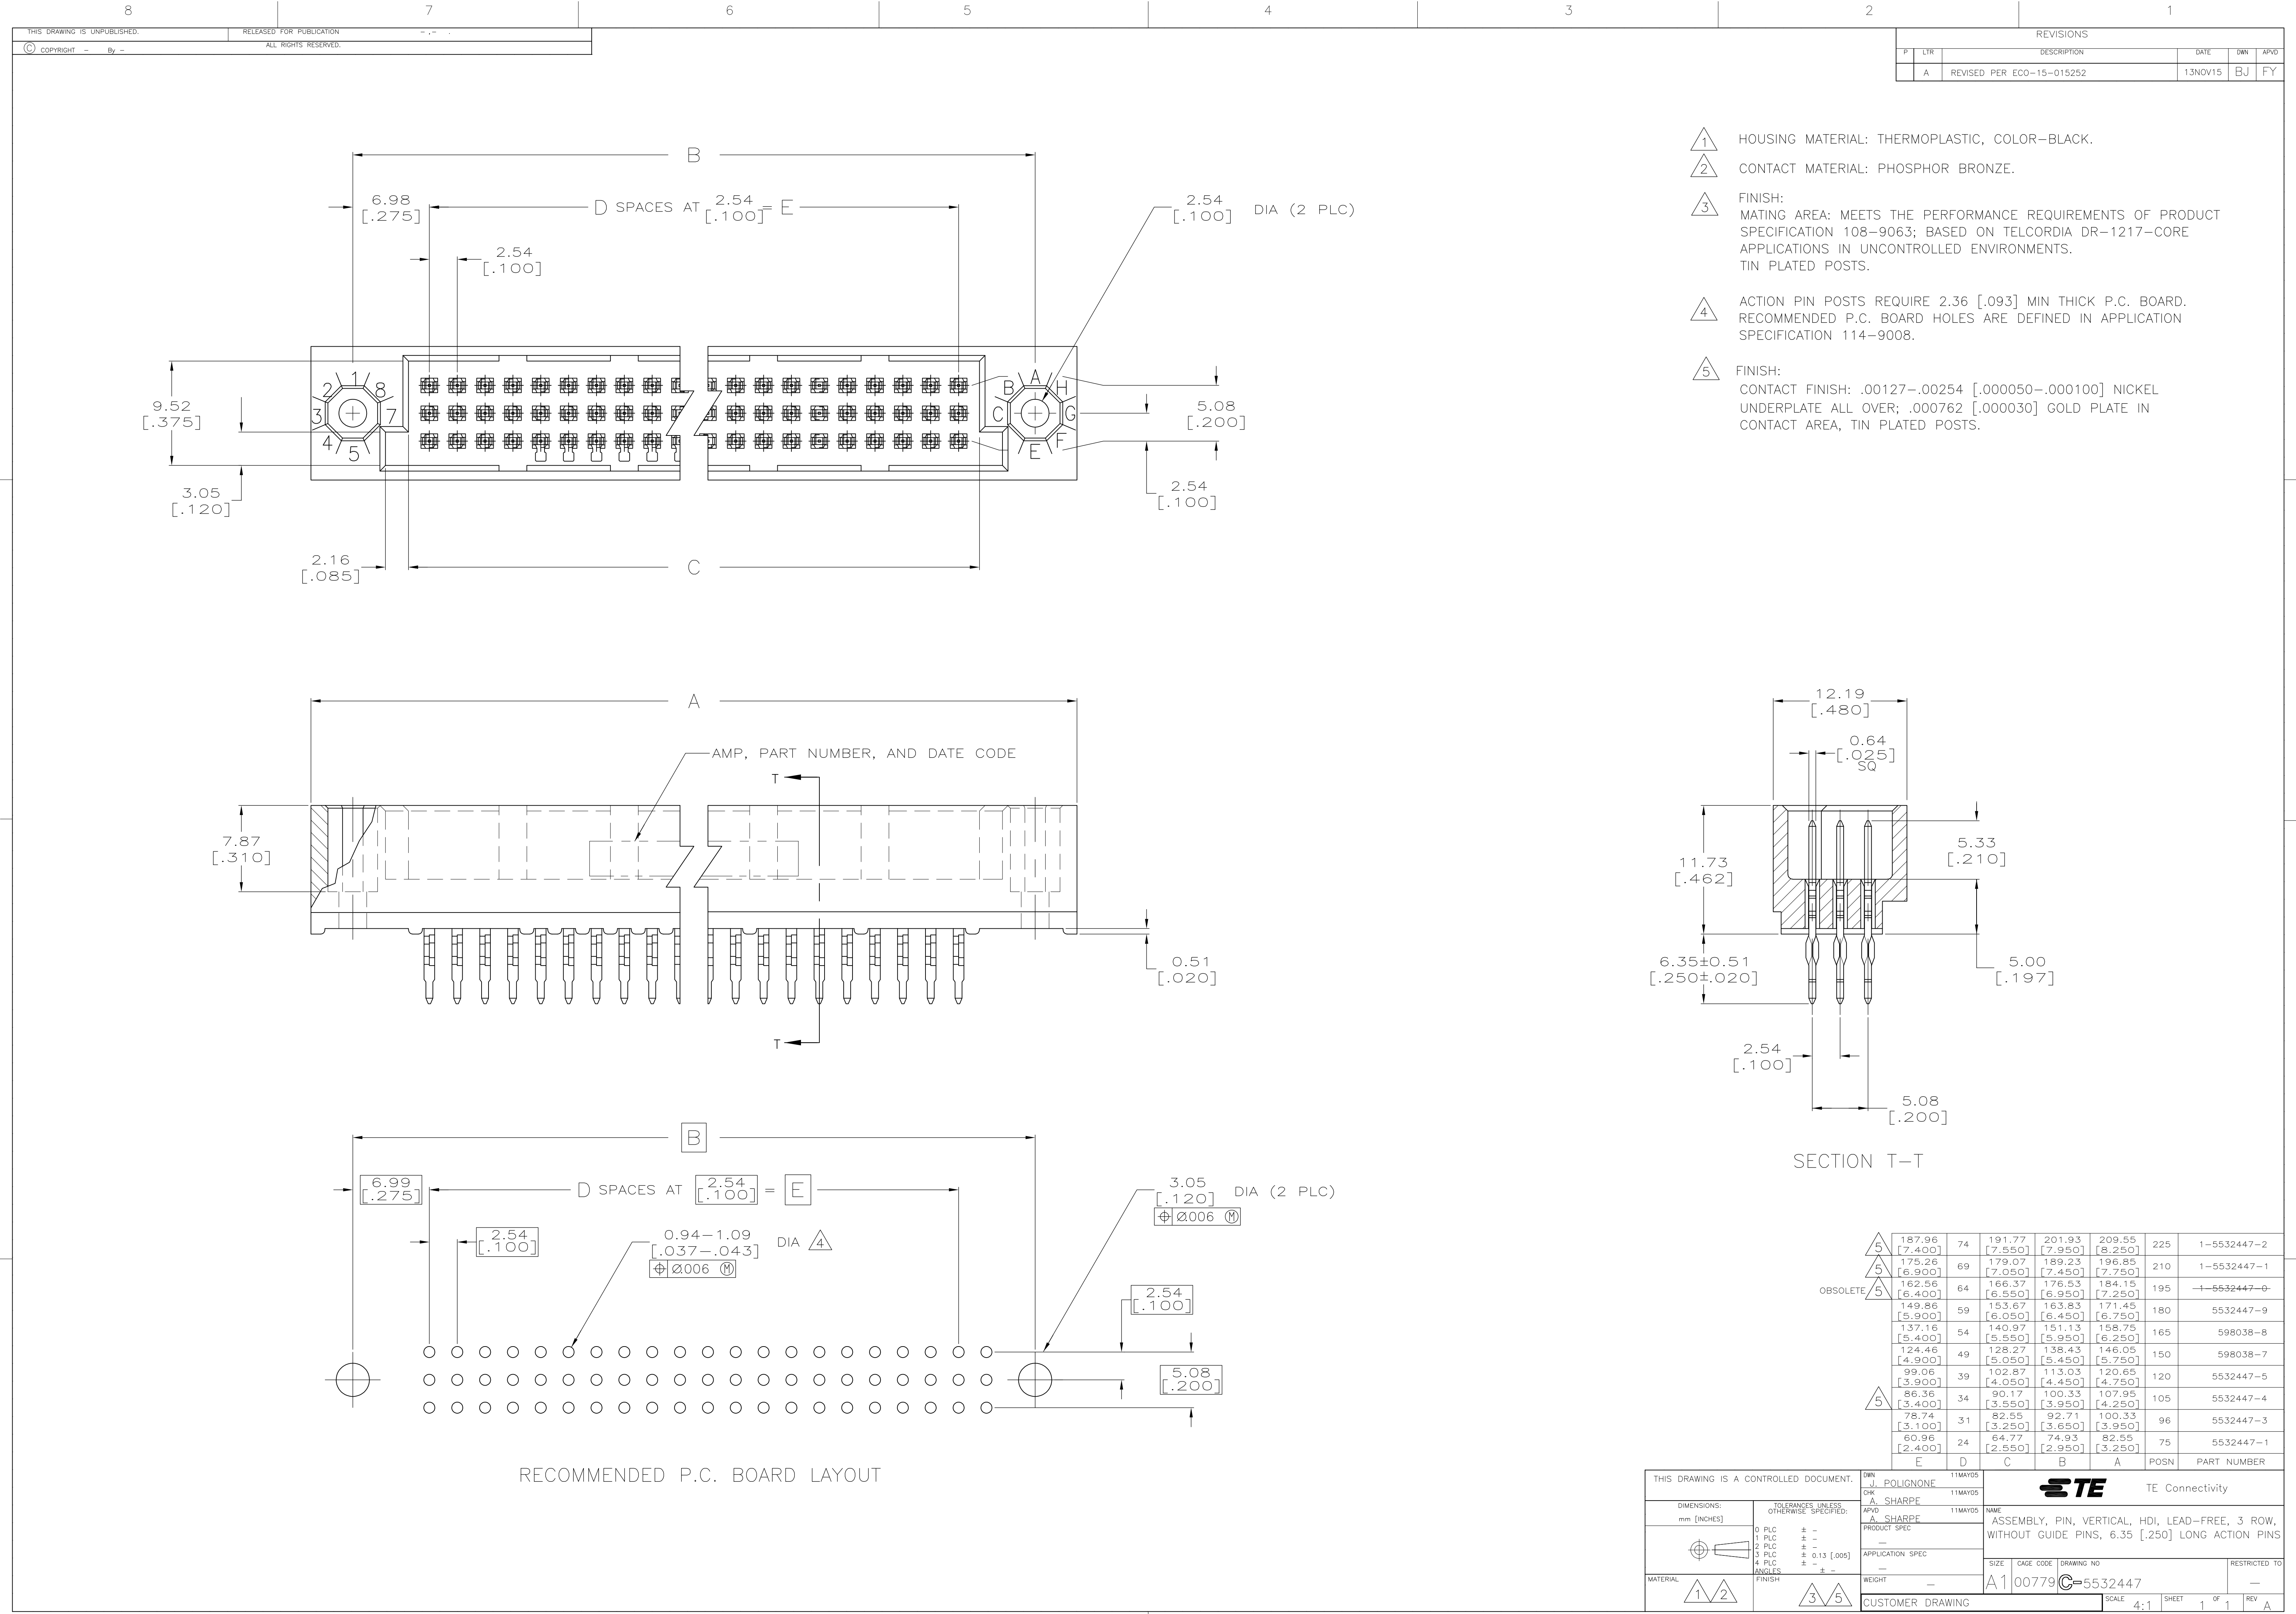

- 1 HOUSING MATERIAL: THERMOPLASTIC, COLOR=BLACK.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 FINISH: MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS. TIN PLATED POSTS.
- 4 ACTION PIN POSTS REQUIRE 2.36 [.093] MIN THICK P.C. BOARD. RECOMMENDED P.C. BOARD HOLES ARE DEFINED IN APPLICATION SPECIFICATION 114-9008.
- 5 FINISH: CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .000762 [.000030] GOLD PLATE IN CONTACT AREA, TIN PLATED POSTS.

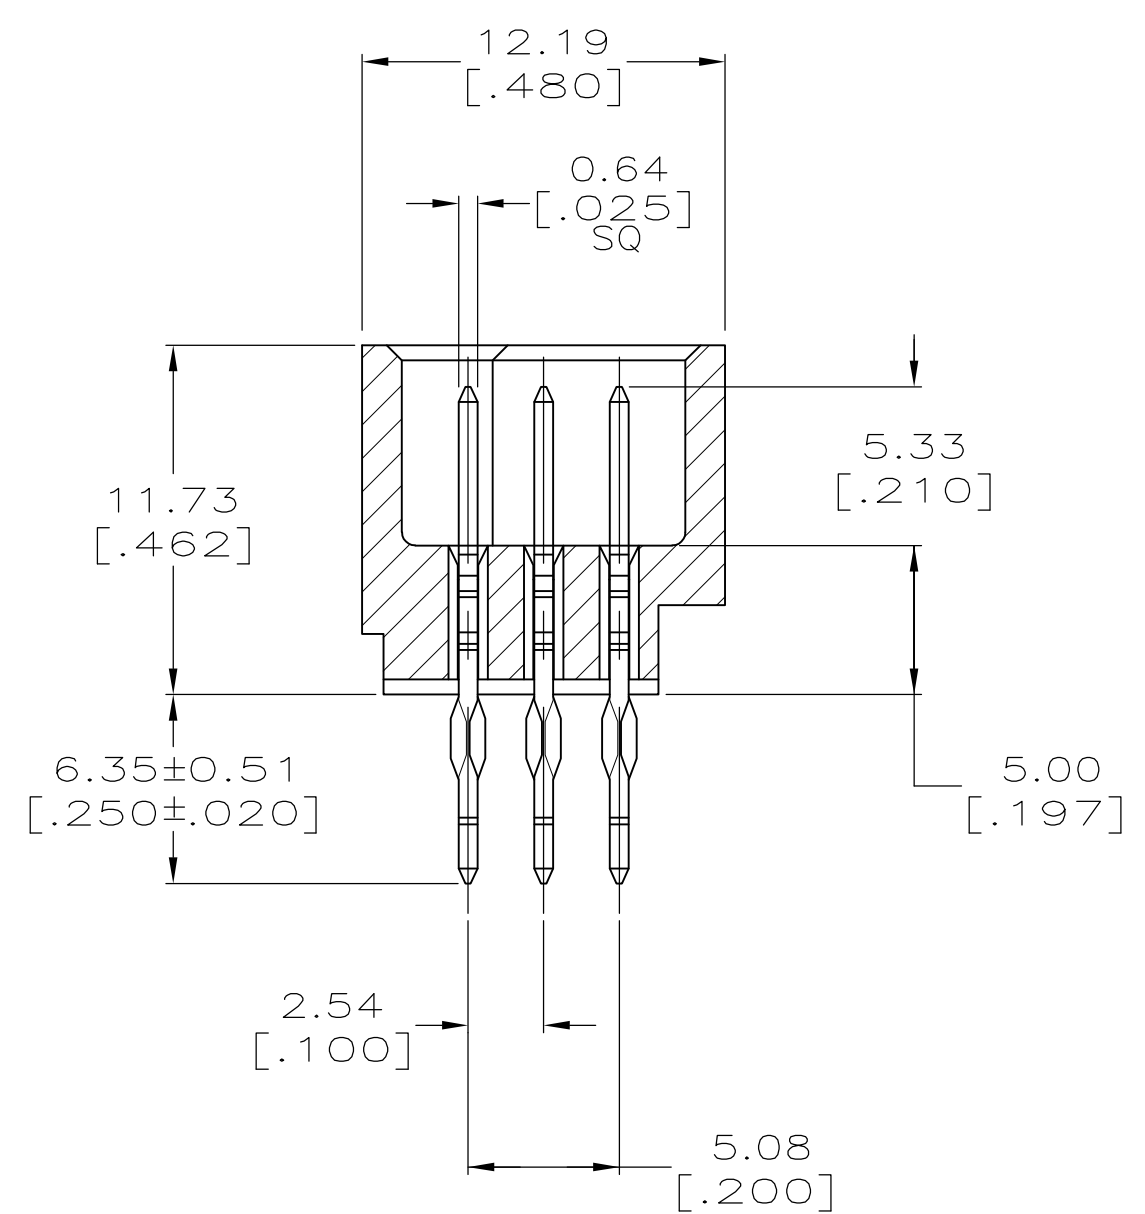

SECTION T-T

POSN	PART NUMBER	A	B	C	D	E
1-5532447-2	187.96 [7.400]	74	191.77 [7.550]	201.93 [7.950]	209.55 [8.250]	225
1-5532447-1	175.26 [6.900]	69	179.07 [7.050]	189.23 [7.450]	196.85 [7.750]	210
1-5532447-0	162.56 [6.400]	64	166.37 [6.550]	176.53 [6.950]	184.15 [7.250]	195
5532447-9	149.86 [5.900]	59	153.67 [6.050]	163.83 [6.450]	171.45 [6.750]	180
598038-8	137.16 [5.400]	54	140.97 [5.550]	151.13 [5.950]	158.75 [6.250]	165
598038-7	124.46 [4.900]	49	128.27 [5.050]	138.43 [5.450]	146.05 [5.750]	150
5532447-5	99.06 [3.900]	39	102.87 [4.050]	113.03 [4.450]	120.65 [4.750]	120
5532447-4	86.36 [3.400]	34	90.17 [3.550]	100.33 [3.950]	107.95 [4.250]	105
5532447-3	78.74 [3.100]	31	82.55 [3.250]	92.71 [3.650]	100.33 [3.950]	96
5532447-1	60.96 [2.400]	24	64.77 [2.550]	74.93 [2.950]	82.55 [3.250]	75

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE CHK A. SHARPE 11MAY05		TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, PIN, VERTICAL, HDI, LEAD-FREE, 3 ROW, WITHOUT GUIDE PINS, 6.35 [.250] LONG ACTION PINS	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -		PRODUCT SPEC APPLICATION SPEC		SIZE A1	
MATERIAL 1 2		FINISH 3 5		DRAWING NO 00779	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1	