



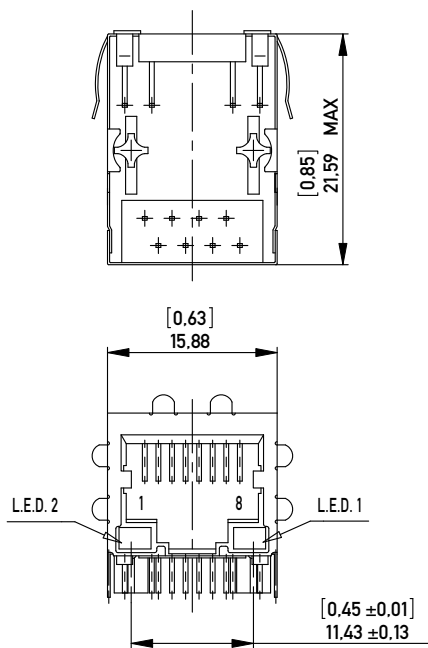

RECOMMENDED PANEL CUTOUT
EMPFOHLENER FRONTPLATTEN AUSSCHNITT

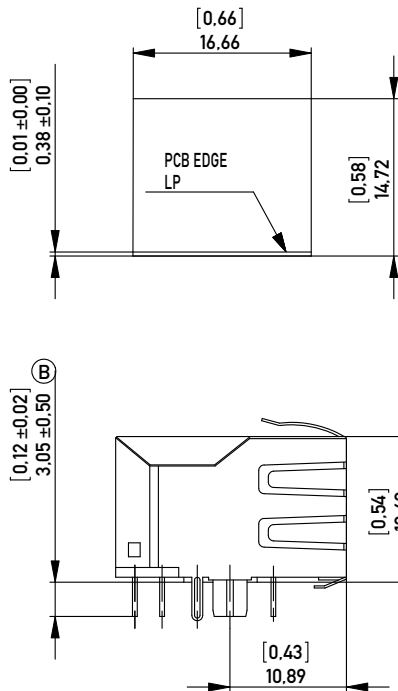

NOTE 1: SIDE SHIELD TABS IN REAR 3.05mm (R)
NOTE 2: PANEL GROUND FLANGES BOTH SIDES AND TOP (GF5)

MATERIALS AND FINISH

HOUSING: GLASS FILLED POLYESTER UL 94 V-0 BLACK
SHIELDING: Cu ALLOY, PLATED WITH Ni
CONTACTS: PHOSPHOR BRONZE
CONTACT FINISH: Au, 0.8 µm (30 µin) OVER Ni
TERMINAL FINISH: Sn MATTE (B)
LED LENS: EPOXY

MECHANICAL CHARACTERISTICS

DURABILITY: 1000 MATING CYCLES

ELECTRICAL CHARACTERISTICS


CONTACT RESISTANCE: 30 MILLIOHMS MAX
OPERATING TEMPERATURE: 0°C TO 70°C

NO. IDENT. NR.	LED 2 LEFT LED 2 LINKS	LED 1 RIGHT LED 1 RECHTS	LED CODE
203198	YELLOW	GREEN	L1
203199	GREEN	YELLOW	L2
203200	GREEN	GREEN	L3
203201	RED	GREEN	L5
203202	YELLOW	YELLOW	L8
203203	ORANGE/GREEN	ORANGE/GREEN	L9


Information:			Tolerances		 All Dimensions in mm		Scale 2:1				
SCHEMATIC NUMBER: M3D01											
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation						
					MOD JACK - MJIM						
					8C8T, 1x1, INT. MAG., LED ALIGNED						
			www.ERNI.com		203197					I (1/2)	
										A3	
B		20.05.2008				Class		MJIM			
Index		Date									

Consider protection marks from DIN 46

ELECTRICAL SCHEMATIC M3D01
ELEKTRISCHER SCHALTPLAN

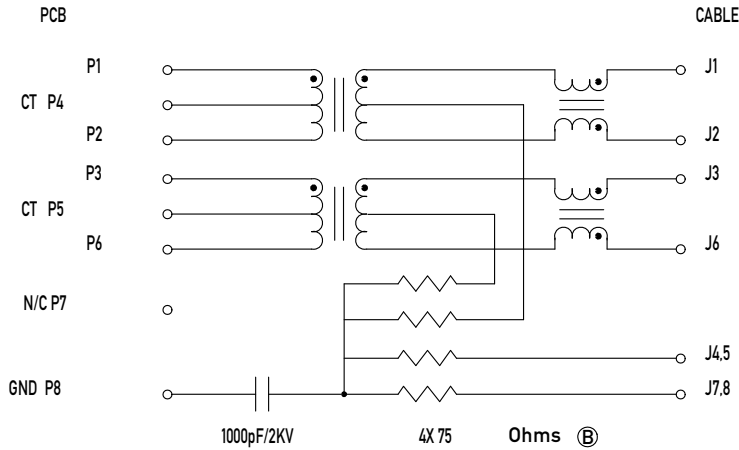

RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)
EMPFOHLENES LEITERPLATTEN-LAYOUT (BESTÜCKUNGSSEITE)
TOL ±0.05 [0.002] UNLESS NOTED
SCALE: 2.5 : 1

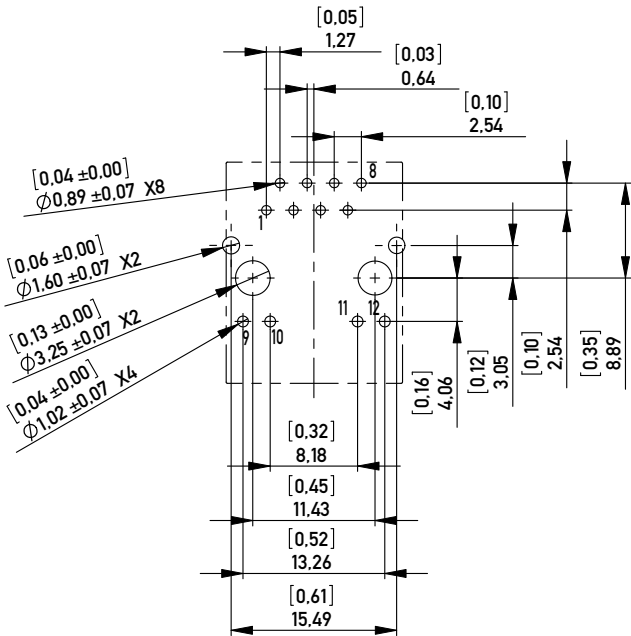

LED SPECIFICATIONS
LED ANWEISUNG

COLOR FARBE	V _f TYP	V _f MAX	I _f mA	CIRCUIT DIAGRAM SCHALTPLAN
YELLOW	2.1	2.5	20	
GREEN	2.2	2.5	20	
RED	2.25	2.5	20	
ORANGE/GREEN	2.05/2.2	2.5	20	

MAGNETICS SPECIFICATIONS @ 25°C
AUTO MDIX COMPATIBLE
TURNS RATIO:
(P1-P2 : J1-J2) 1CT : 1 ±3%
(P3-P6 : J3-J6) 1CT : 1 ±3%
OCL(100 KHz, 0.1 Vrms, 8 mA)
(P1-P2 : P3-P6) 350µH MIN
DCR (P1-P2, P3-P6) 0.9 OHMS MAX
INSERTION LOSS:
0.1-100 MHz -1.1 dB MAX
RETURN LOSS:
0.5 - 30 MHz: -18 dB MIN
40 MHz: -15.5 dB MIN
50 MHz -13.6 dB MIN
60 - 80 MHz -12 dB MIN
CROSSTALK:
1-100 MHz -40 dB TYP
CMR:
0.1 - 30 MHz -50 dB TYP
30 - 60 MHz -40 dB TYP
60 - 100 MHz -35 dB TYP
ISOLATION 1500 Vrms

Information:	Tolerances	Scale 2:1	Designation
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	All Dimensions in mm	MOD JACK - MJIM 8C8T, 1x1, INT. MAG., LED ALIGNED
ERNI	www.ERNI.com	203197	I (2/2) A3
Class	MJIM		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[203200](#) [203199](#) [203198](#) [203203](#)