


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

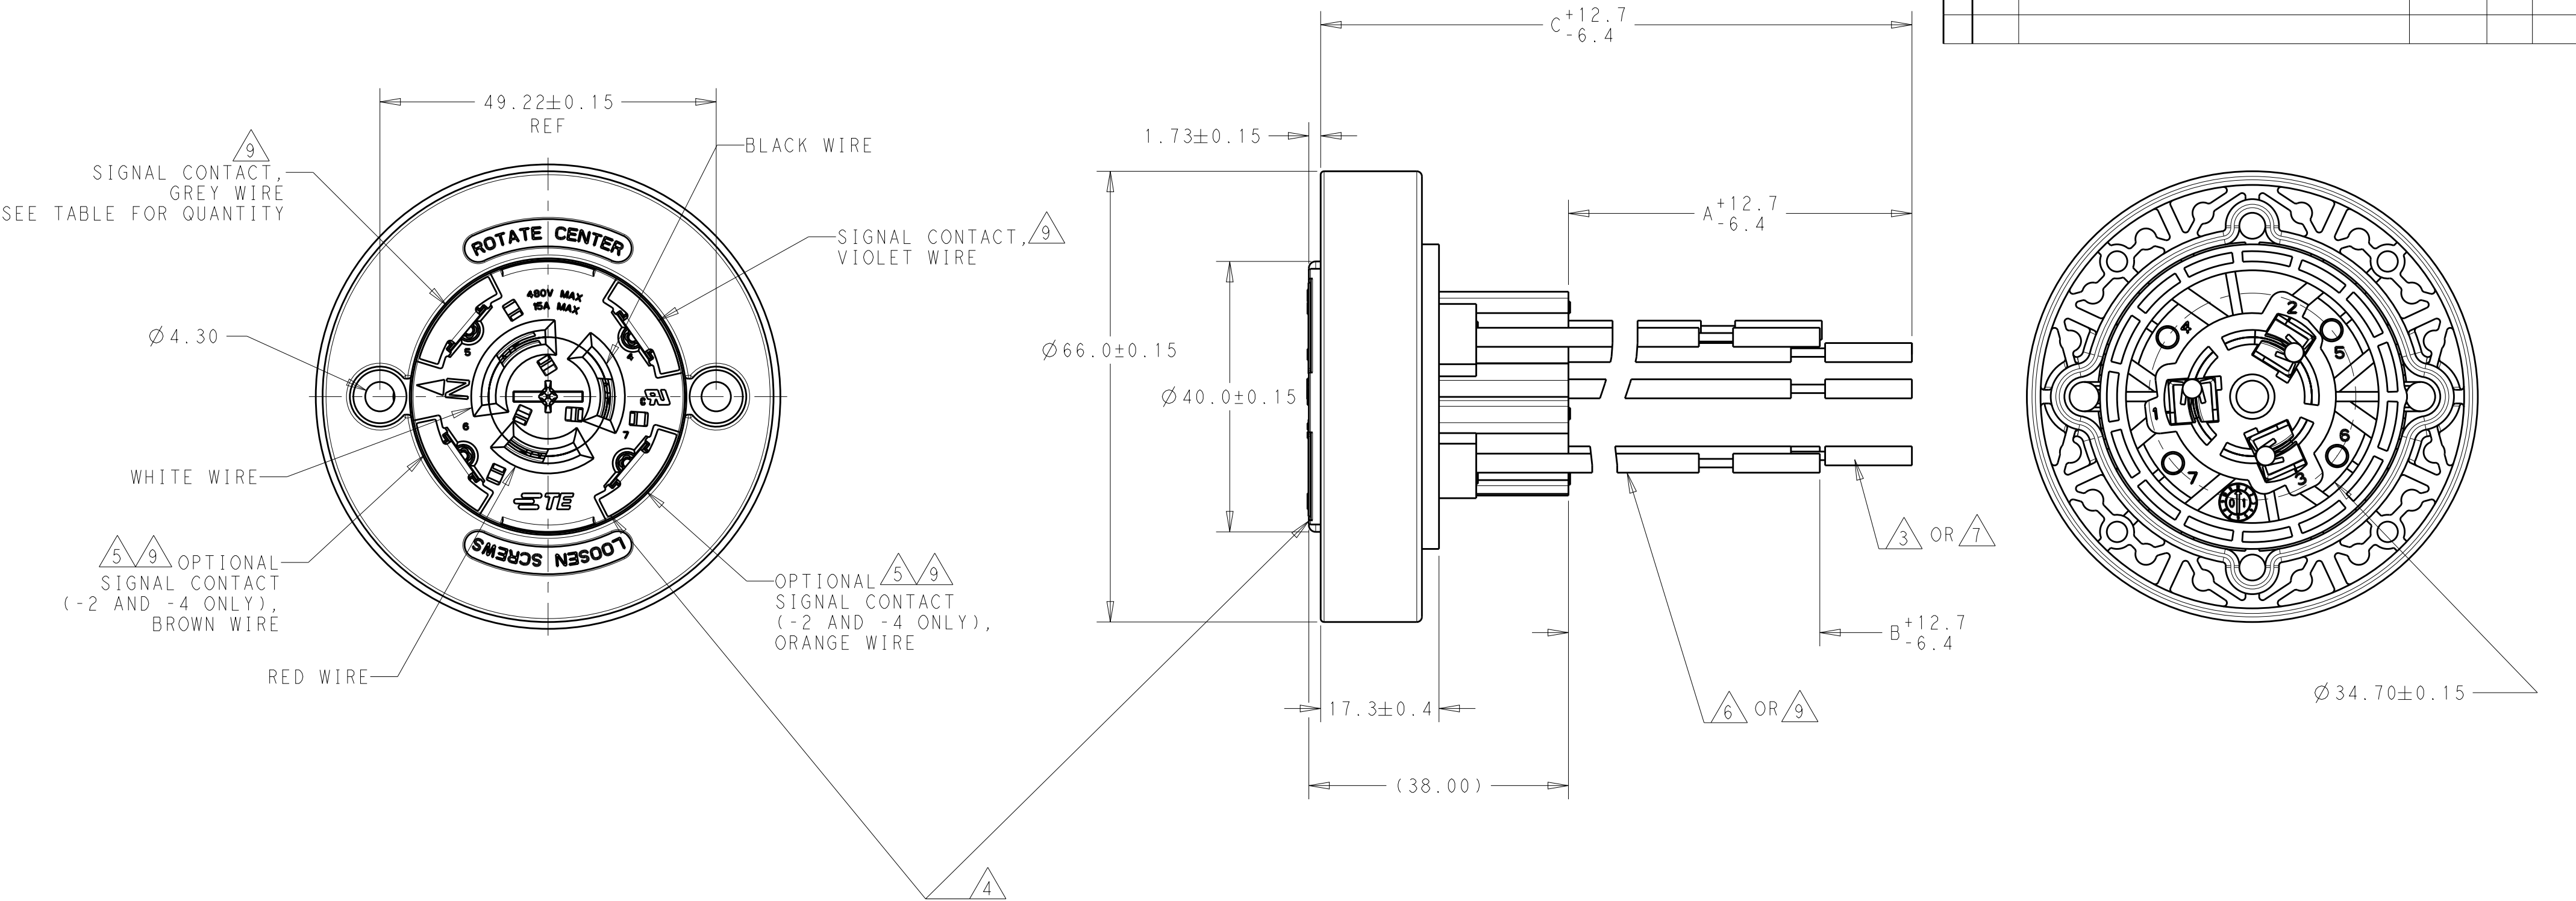

TYPE	POSITION #	WIRE COLOR
POWER	1	BLACK
POWER	2	WHITE
POWER	3	RED
SIGNAL	4	VIOLET
SIGNAL	5	GRAY
SIGNAL	6	BROWN
SIGNAL	7	ORANGE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVLS 07APR2015	 TE Connectivity		
DIMENSIONS:		CHK C.GINGRICH 07APR2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C.GINGRICH 07APR2015	NAME ASSEMBLY ROTATING DIMMING RECEPTACLE (49.22mm),		
mm		PRODUCT SPEC 108-32059	SIZE A2		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		APPLICATION SPEC 114-32148	CAGE CODE C-2213627		
MATERIAL		WEIGHT	RESTRICTED TO		
-		-	-		
-		-	-		
		Customer Drawing	SCALE 1:2 SHEET 2 OF 3 REV 6		


NEW PRODUCT
PRELIMINARY
IN DEVELOPMENT

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20
© COPYRIGHT 20	BY -	ALL RIGHTS RESERVED.		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

IF THE LOCK RING BECOME SEPARATED FROM THE INNER HOUSING ASSEMBLY, FOLLOW THE THESE STEPS TO SNAP IT BACK INTO PLACE

TO ASSEMBLE THE LOCK RING ONTO THE INNER HOUSING, THESE STEPS MUST BE FOLLOWED.

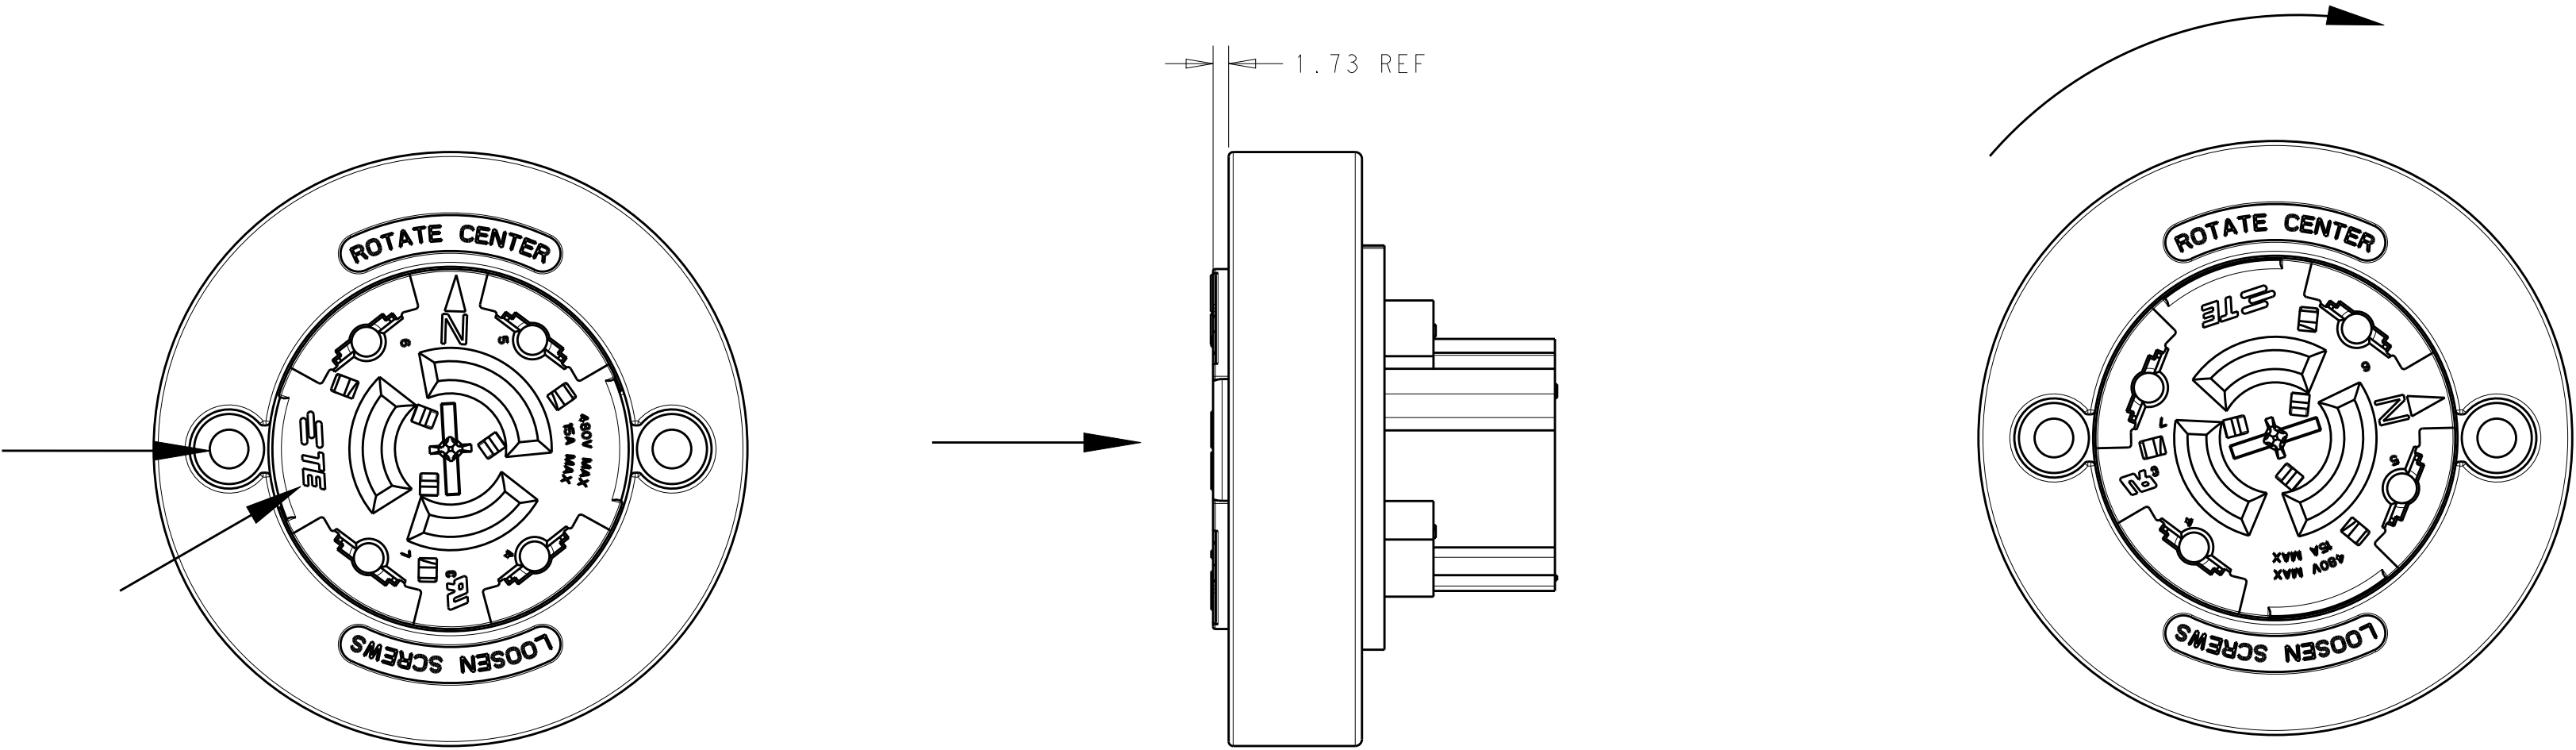

STEP 1: ALIGN THE TE LOGO WITH ONE OF THE SCREW HOLES ON THE LOCK RING.

STEP 2: SNAP THE LOCK RING ONTO THE INNER HOUSING ASSEMBLY

STEP 3: TURN THE LOCK RING FULLY CLOCKWISE UNTIL IT STOPS (THE NORTH INDICATOR WILL BE ADJACENT TO ONE OF THE SCREW HOLES IN THE LOCK RING)

NEW PRODUCT
PRELIMINARY
IN DEVELOPMENT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVL.S 07APR2015	TE Connectivity			
DIMENSIONS: mm		CHK C.GINGRICH 07APR2015				
		APVD C.GINGRICH 07APR2015	NAME ASSEMBLY ROTATING DIMMING RECEPTACLE (49.22mm),			
		PRODUCT SPEC 108-32059	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-32148	SIZE A2	CAGE CODE -	DRAWING NO C-2213627	RESTRICTED TO -
MATERIAL - -		WEIGHT -	Customer Drawing			
			SCALE 1:2	SHEET 3	OF 3	REV 6