
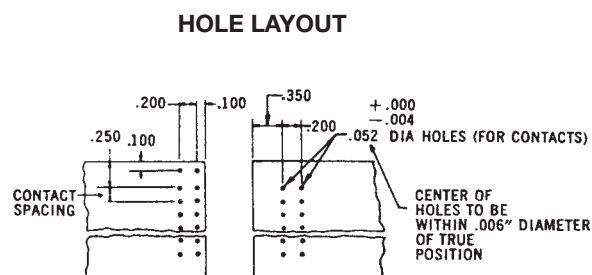


Varicon®

Series 5101 – Contact Strip

Tandem Cards – Pad Spacings .125"/.150"/.200"

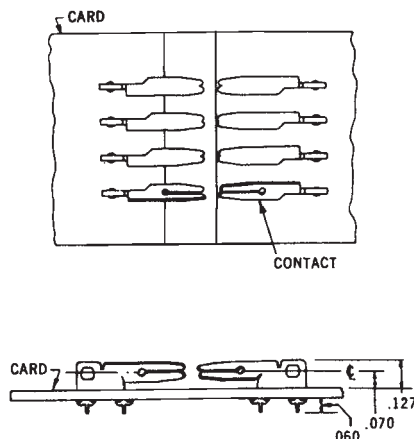

TECHNICAL SPECIFICATIONS

Contacts:

Contacts on .125", .150" or .200" Centers
Contacts supplied on disposable plastic carrier strips.

Current Rating:

8 amperes

Contact Resistance:

0.006 Ohm, maximum

Contact Material and Plating:

Phosphor Bronze

Gold, 10 microinches minimum,
over nickel, 50 to 100 microinches

Insertion/Withdrawal Force:

2 to 16 ounces per contact

CONTACTS

Contacts are available on three spacings; each spacing has a corresponding maximum number of contacts. Fewer contacts can be ordered.

.200" spacing with a max. of 60 contacts.

.150" spacing with a max. of 80 contacts.

.125" spacing with a max. of 90 contacts.

ORDERING CODE

02

000

000

5

000

000

Number of Contacts
on Strip
001 to 090
according to spacing

Contact Style
046  1/16" card

Contact
Pattern

Contact
Spacing
125, 150 or 200

For loose contacts, order by individual part numbers tabulated on page 53.