
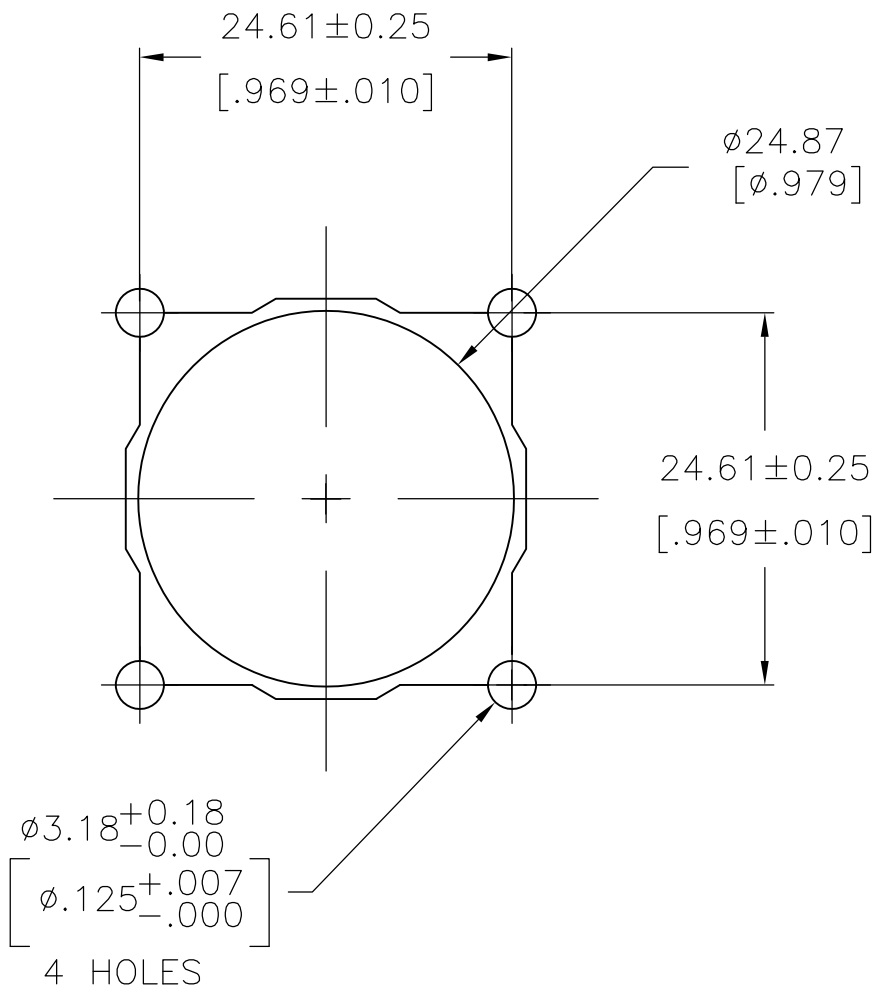
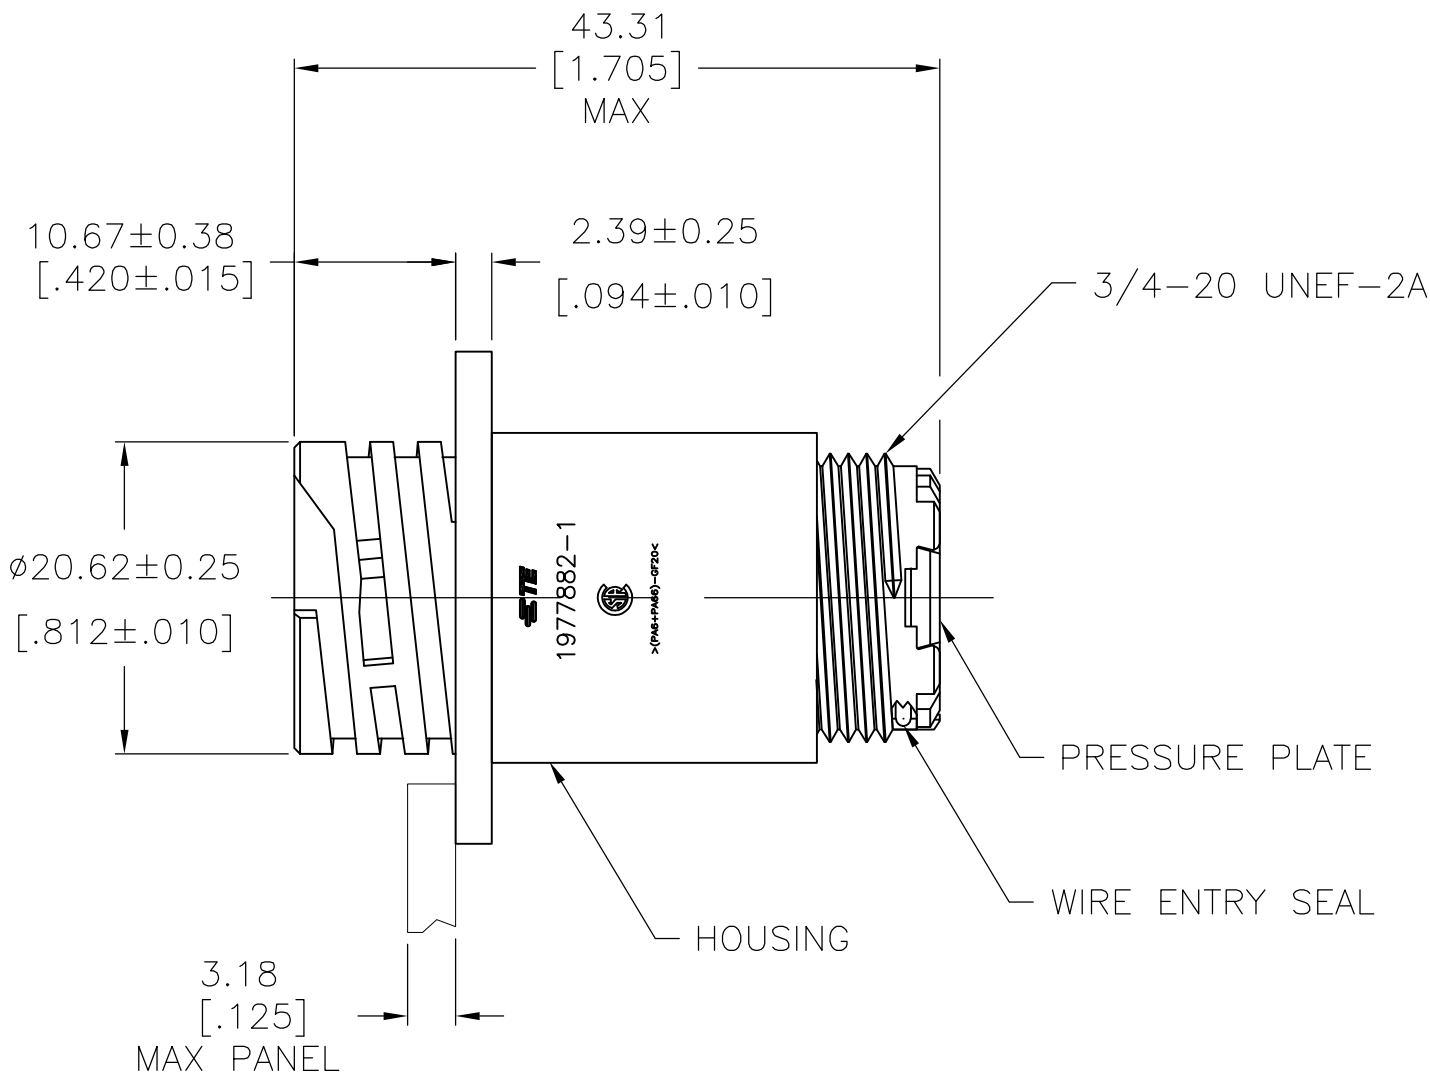



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING PER ECO-12-018480	08NOV12	KH	MZ
	B	REVISED PER ECO-16-006378	03NOV2016	RS	MZ

- 1 THIS PART WILL ACCEPT NINE (9) MULTIMATE PIN CONTACTS.
- 2 HOUSING AND PRESSURE PLATE: NYLON, BLACK.
PERIPHERAL SEAL: ELASTOMER, GRAY.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.

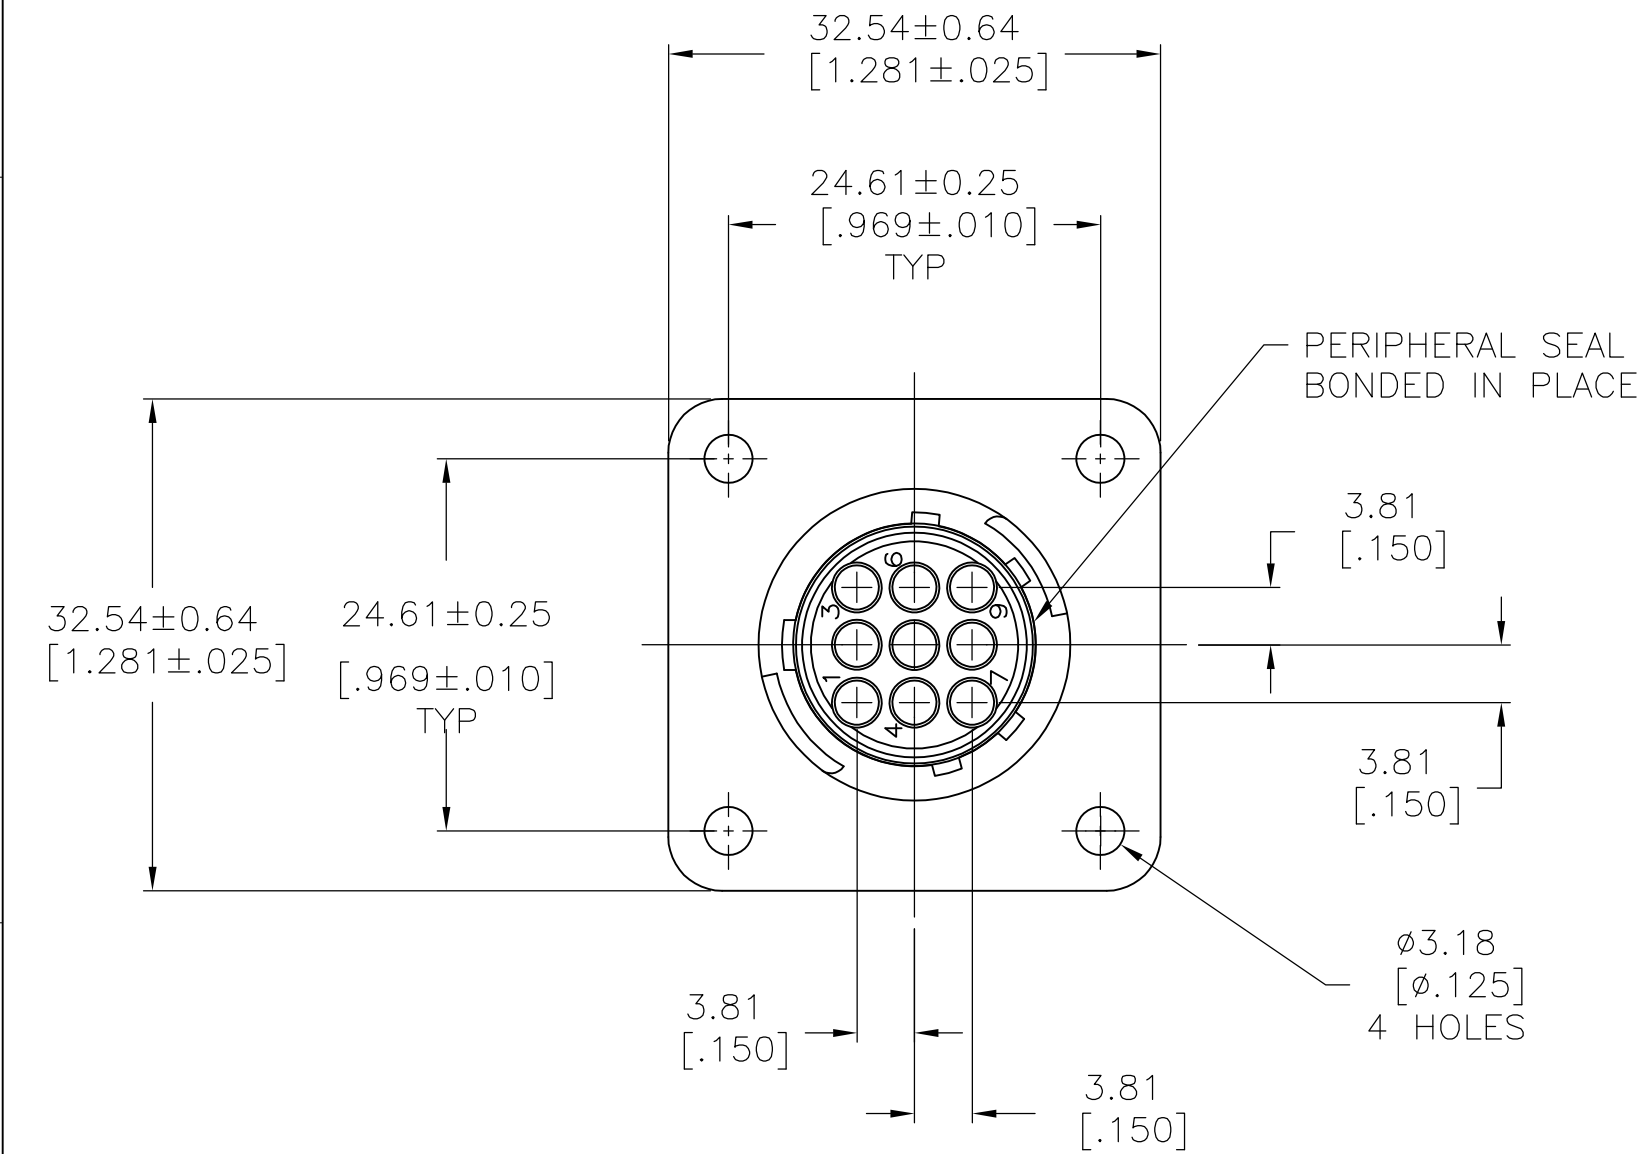

RECOMMENDED PANEL CUTOUT

NO	.065-.100	STANDARD	1977882-1
THREADED INSERTS	WIRE INSULATION DIAMETER RANGE	INSULATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 08NOV12		 TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK M ZITTO 08NOV12						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M ZITTO 08NOV12		NAME CPC SQUARE FLANGE RECEPTACLE ASSEMBLY, SERIES 1, SEALED,13-9, STANDARD SEX, UV RESISTANT			
	0 PLC ± -		PRODUCT SPEC —					
	1 PLC ± -		APPLICATION SPEC —					
	2 PLC ± 0.13 [.005]		—					
	3 PLC ± -		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	4 PLC ± -		—		A2	00779	C=1977882	—
	ANGLES ± -		CUSTOMER DRAWING					
	MATERIAL		FINISH				2:1	1 of 1