STGW25H120DF2, STGWA25H120DF2

Trench gate field-stop IGBT, H series 1200 V, 25 A high speed

Datasheet - production data

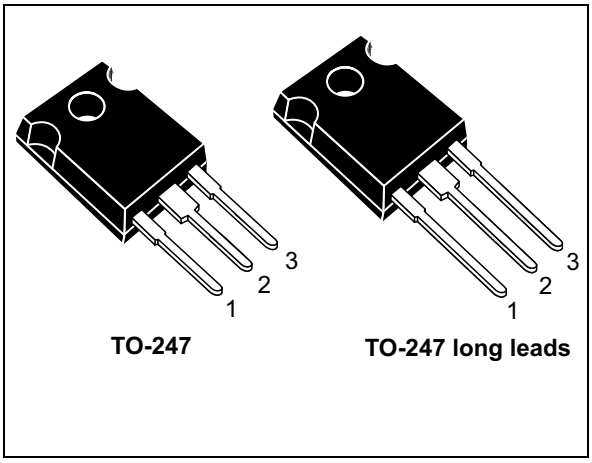

Figure 1. Internal schematic diagram

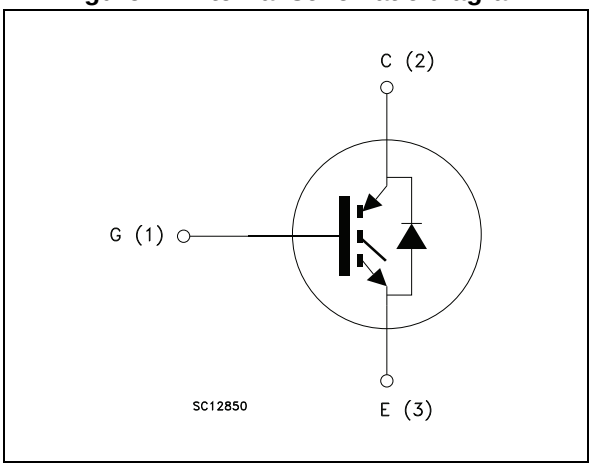

Features

- Maximum junction temperature: T_J = 175 °C
- High speed switching series
- Minimized tail current
- $V_{CE(sat)}$ = 2.1 V (typ.) @ I_C = 25 A
- 5 µs minimum short circuit withstand time at T_J=150 °C
- Safe paralleling
- Very fast recovery antiparallel diode
- Low thermal resistance

Applications

- Uninterruptible power supply
- Welding machines
- Photovoltaic inverters
- Power factor correction
- High frequency converters

Description

These devices are IGBTs developed using an advanced proprietary trench gate field-stop structure. These devices are part of the H series of IGBTs, which represent an optimum compromise between conduction and switching losses to maximize the efficiency of high switching frequency converters. Moreover, a slightly positive $V_{CE(sat)}$ temperature coefficient and very tight parameter distribution result in safer paralleling operation.

Table 1. Device summary

Order code	Marking	Package	Packaging
STGW25H120DF2	G25H120DF2	TO-247	Tube
STGWA25H120DF2	G25H120DF2	TO-247 long leads	Tube

This is information on a product in full production. www.st.com

Contents

1 **Electrical ratings 3**

2 **Electrical characteristics 4**

2.1 Electrical characteristics (curves) 6

3 **Test circuits 11**

4 **Package information 12**

4.1 TO-247, package information 12

4.2 TO-247 long leads, package information 14

5 **Revision history 16**

1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CES}	Collector-emitter voltage (V_{GE} = 0)	1200	V
I_C	Continuous collector current at T_C = 25 °C	50	A
	Continuous collector current at T_C = 100 °C	25	A
I_{CP} (1)	Pulsed collector current	100	A
V_{GE}	Gate-emitter voltage	±20	V
I_F	Continuous collector current at T_C = 25 °C	50	A
	Continuous collector current at T_C = 100 °C	25	A
I_{FP} (1)	Pulsed forward current	100	A
P_{TOT}	Total dissipation at T_C = 25 °C	375	W
T_J	Operating junction temperature	– 55 to 175	°C
T_{STG}	Storage temperature range	– 55 to 150	

1. Pulse width limited by maximum junction temperature.

Table 3. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance junction-case IGBT	0.4	°C/W
R_{thJC}	Thermal resistance junction-case diode	1.47	°C/W
R_{thJA}	Thermal resistance junction-ambient	50	°C/W

2 Electrical characteristics

T_J = 25 °C unless otherwise specified.

Table 4. Static characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CES}$	Collector-emitter breakdown voltage (V_{GE} = 0)	I_C = 2 mA	1200			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C = 25 A		2.1	2.6	V
		V_{GE} = 15 V, I_C = 25 A T_J = 125 °C		2.4		
		V_{GE} = 15 V, I_C = 25 A T_J = 175 °C		2.5		
V_F	Forward on-voltage	I_F = 25 A		3.8	4.9	V
		I_F = 25 A, T_J = 125 °C		3.05		
		I_F = 25 A, T_J = 175 °C		2.8		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 1 mA	5	6	7	V
I_{CES}	Collector cut-off current (V_{GE} = 0)	V_{CE} = 1200 V			25	µA
I_{GES}	Gate-emitter leakage current (V_{CE} = 0)	V_{GE} = ± 20 V			250	nA

Table 5. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{ies}	Input capacitance	V_{CE} = 25 V, f = 1 MHz, V_{GE} = 0	-	2010	-	pF
C_{oes}	Output capacitance		-	146	-	pF
C_{res}	Reverse transfer capacitance		-	49	-	pF
Q_g	Total gate charge	V_{CC} = 960 V, I_C = 25 A, V_{GE} = 15 V, see *Figure 29*	-	100	-	nC
Q_{ge}	Gate-emitter charge		-	11	-	nC
Q_{gc}	Gate-collector charge		-	52	-	nC

Table 6. IGBT switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{CE} = 600 V, I_C = 25 A, R_G = 10 Ω, V_{GE} = 15 V, see *Figure 28*	-	29	-	ns
t_r	Current rise time		-	12	-	ns
$(di/dt)_{on}$	Turn-on current slope		-	1774	-	A/µs
$t_{d(off)}$	Turn-off delay time			130	-	ns
t_f	Current fall time		-	106	-	ns
E_{on}(1)	Turn-on switching losses		-	0.6	-	mJ
E_{off}(2)	Turn-off switching losses		-	0.7	-	mJ
E_{ts}	Total switching losses		-	1.3	-	mJ
$t_{d(on)}$	Turn-on delay time	V_{CE} = 600 V, I_C = 25 A, R_G = 10 Ω, V_{GE} = 15 V, T_J = 175 °C, see *Figure 28*	-	27.5	-	ns
t_r	Current rise time		-	13.5	-	ns
$(di/dt)_{on}$	Turn-on current slope		-	1522	-	A/µs
$t_{d(off)}$	Turn-off delay time		-	139	-	ns
t_f	Current fall time		-	200	-	ns
E_{on}(1)	Turn-on switching losses		-	1.05	-	mJ
E_{off}(2)	Turn-off switching losses		-	1.65	-	mJ
E_{ts}	Total switching losses		-	2.7	-	mJ
t_{sc}	Short-circuit withstand time	V_{CE} = 600 V, V_{GE} = 15 V, T_J = 150 °C,	5		-	µs

1. Energy losses include reverse recovery of the external diode.
2. Turn-off losses include also the tail of the collector current.

Table 7. Diode switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	I_F = 25 A, V_R = 600 V, di/dt=500 A/µs, V_{GE} = 15 V, see *Figure 28*	-	303	-	ns
Q_{rr}	Reverse recovery charge		-	0.93	-	µC
I_{rrm}	Reverse recovery current		-	15.3	-	A
dI_{rr}/dt	Peak rate of fall of reverse recovery current during t_b		-	400	-	A/µs
E_{rr}	Reverse recovery energy		-	0.52	-	mJ
t_{rr}	Reverse recovery time	I_F = 25 A, V_R = 600 V, di/dt=500 A/µs, V_{GE} = 15 V, T_J = 175 °C, see *Figure 28*	-	508	-	ns
Q_{rr}	Reverse recovery charge		-	2.71	-	µC
I_{rrm}	Reverse recovery current		-	23	-	A
dI_{rr}/dt	Peak rate of fall of reverse recovery current during t_b		-	680	-	A/µs
E_{rr}	Reverse recovery energy		-	1.56	-	mJ

2.1 Electrical characteristics (curves)

Figure 2. Power dissipation vs. case temperature

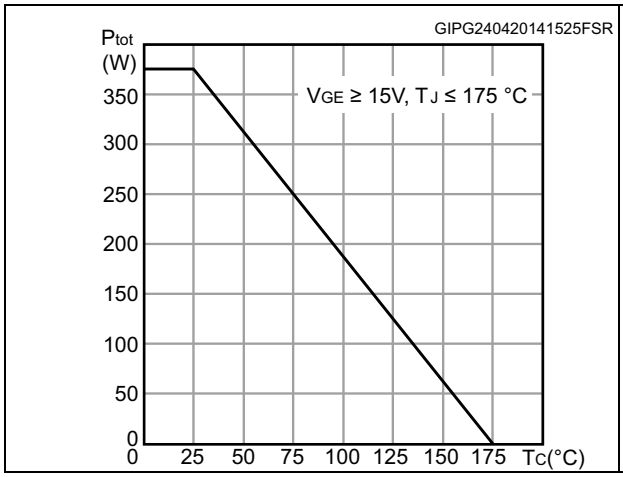

Figure 3. Collector current vs. case temperature

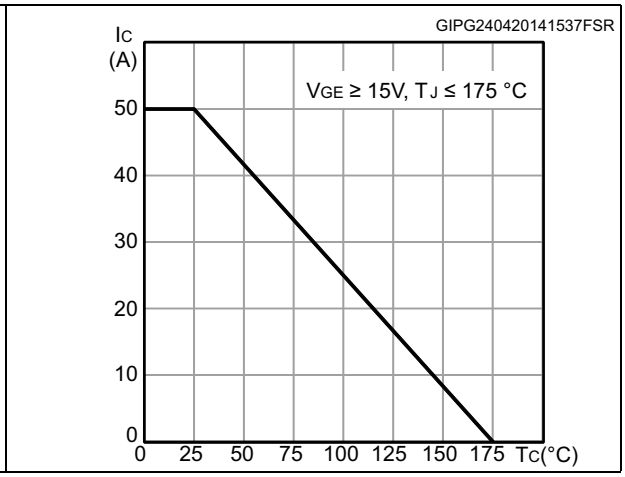

Figure 4. Output characteristics (T_J = 25°C)

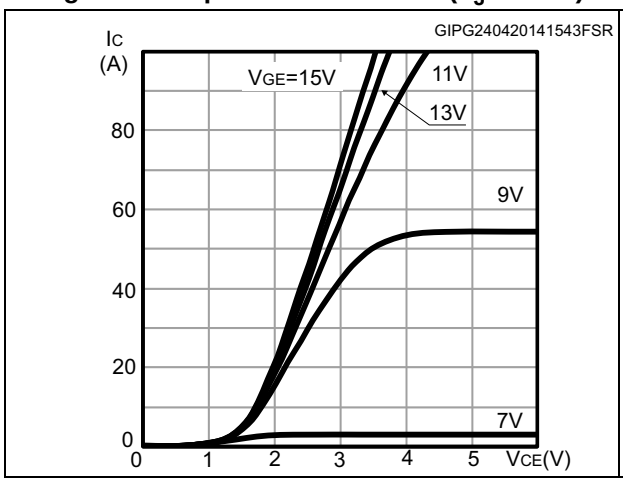

Figure 5. Output characteristics (T_J = 175°C)

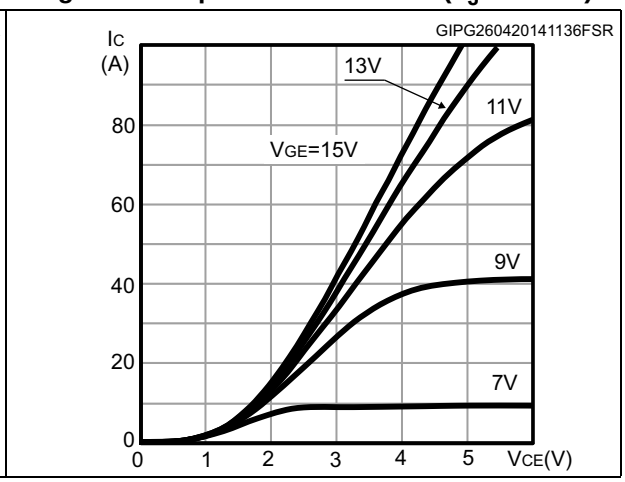

Figure 6. $V_{CE(sat)}$ vs. junction temperature

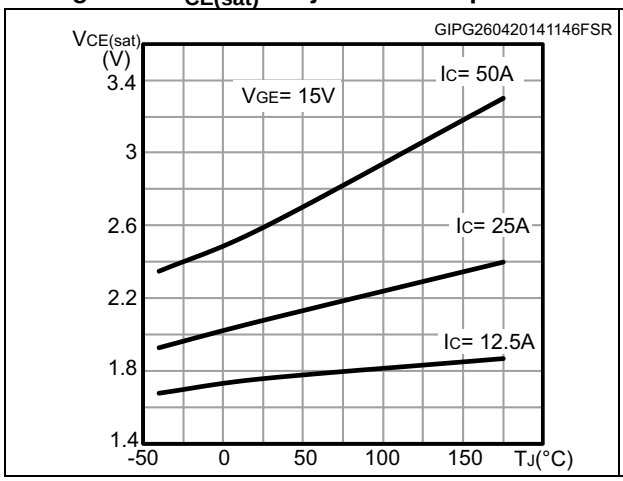

Figure 7. $V_{CE(sat)}$ vs. collector current

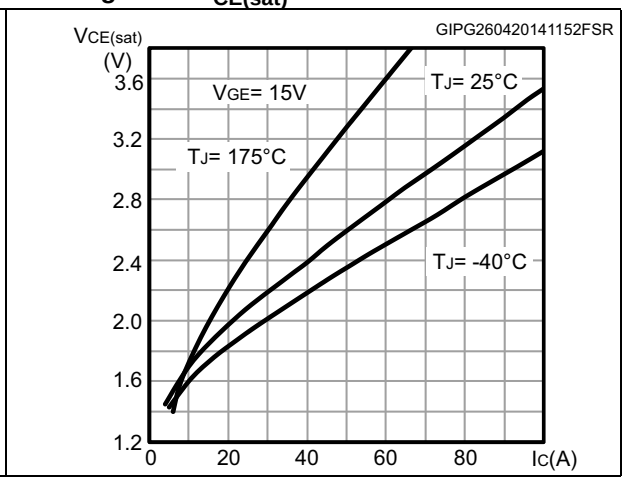

Figure 8. Collector current vs. switching frequency

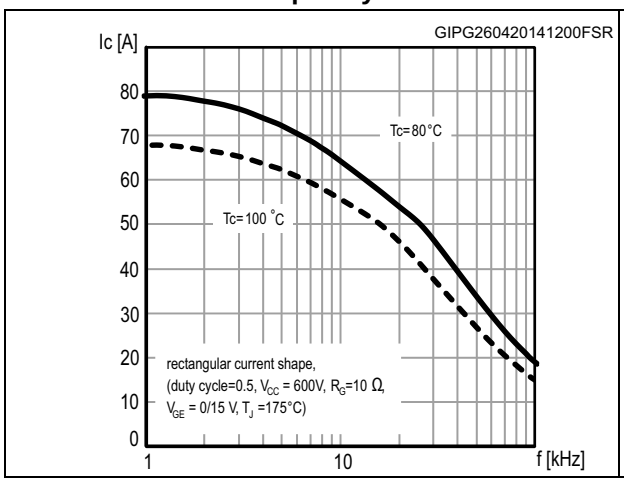

Figure 9. Forward bias safe operating area

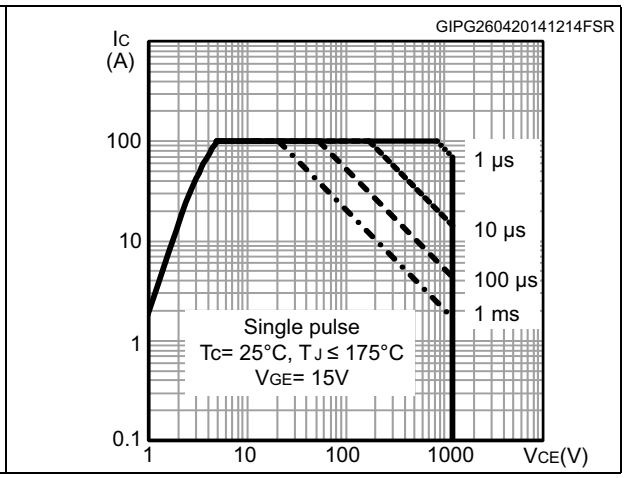

Figure 10. Transfer characteristics

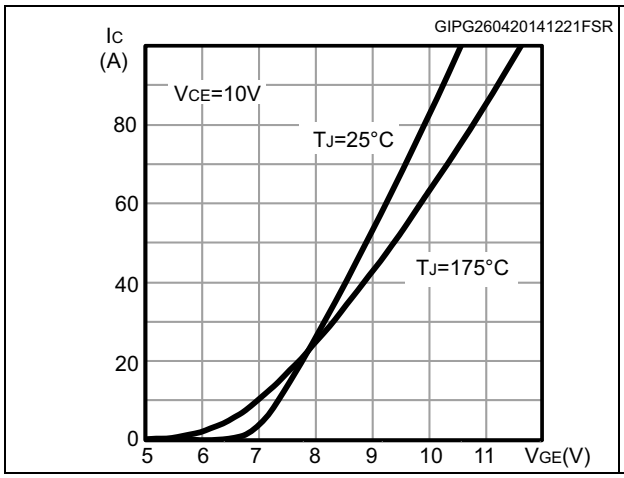

Figure 11. Normalized $V_{GE(th)}$ vs junction temperature

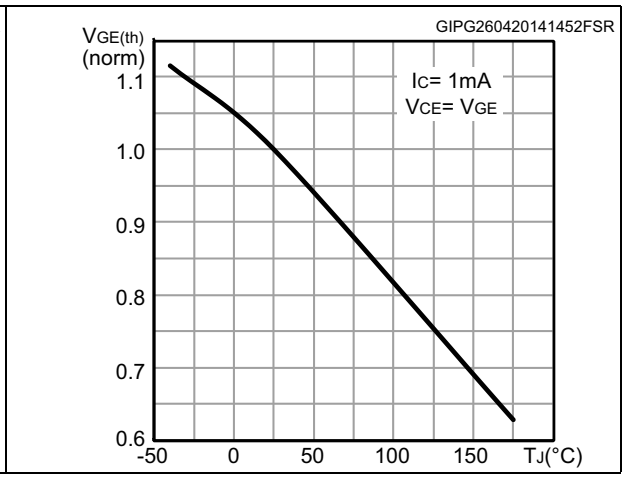

Figure 12. Normalized $V_{(BR)CES}$ vs. junction temperature

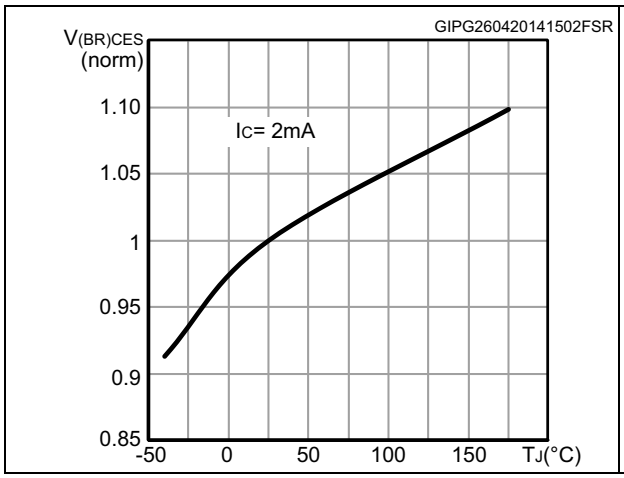

Figure 13. Capacitance variation

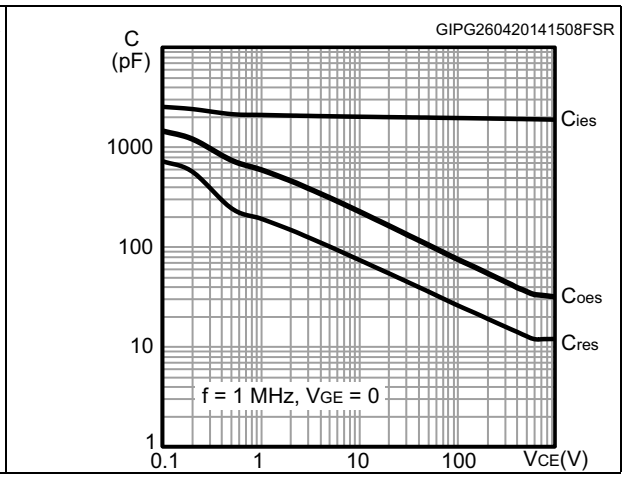

Figure 14. Gate charge vs. gate-emitter voltage

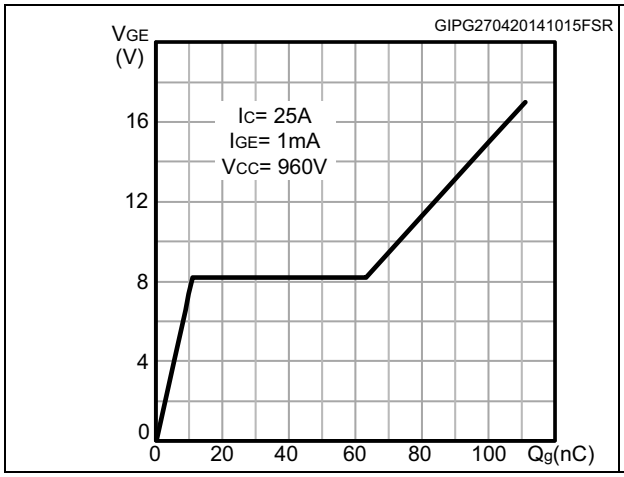

Figure 15. Switching loss vs collector current

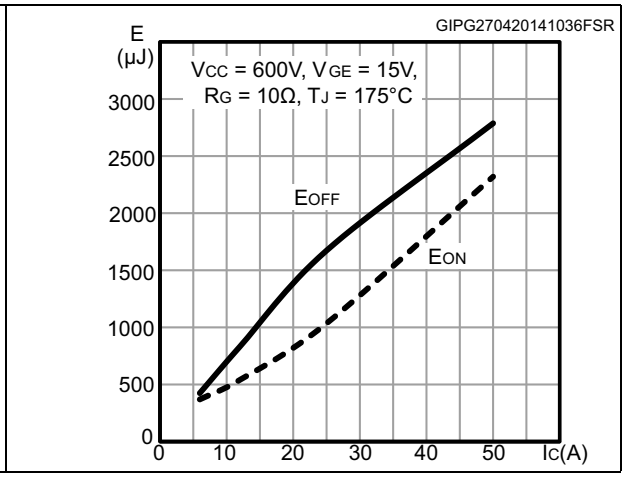

Figure 16. Switching loss vs gate resistance

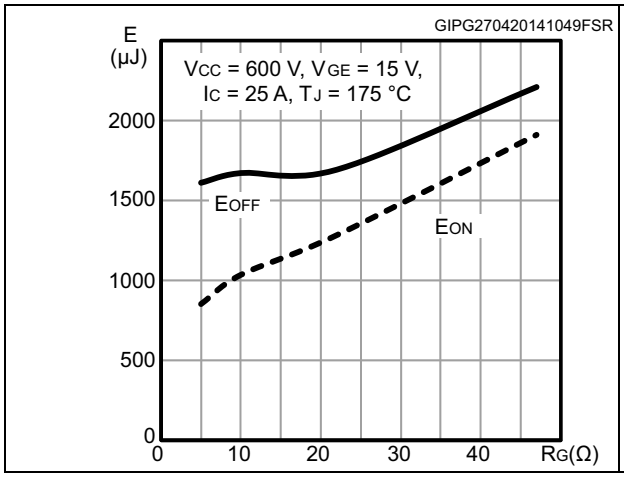

Figure 17. Switching loss vs temperature

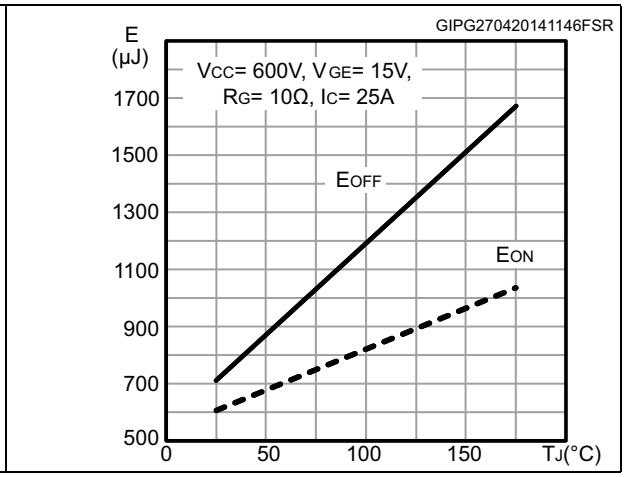

Figure 18. Switching loss vs collector-emitter voltage

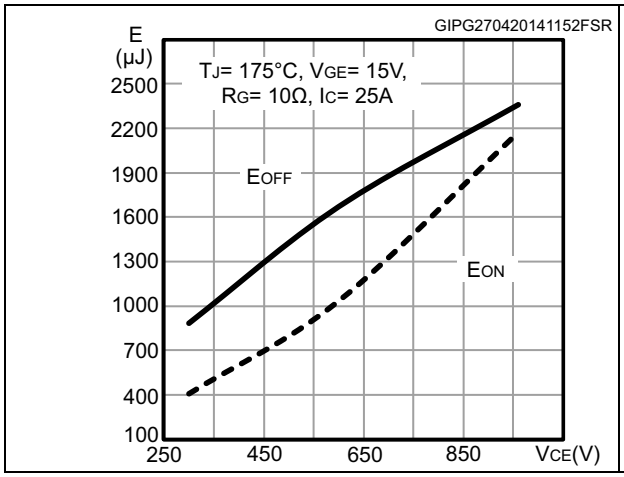

Figure 19. Switching times vs. collector current

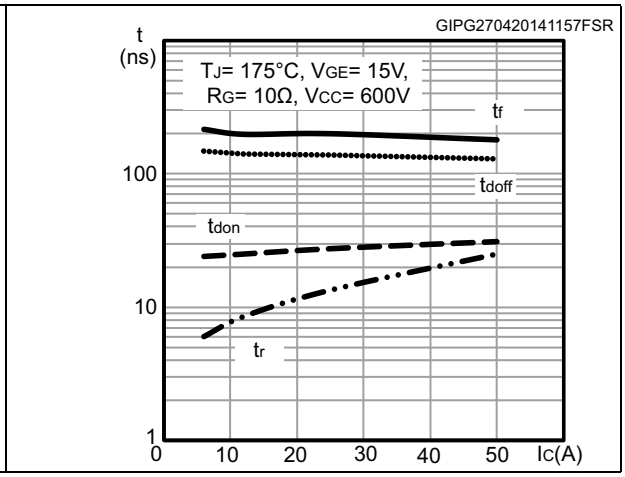

Figure 20. Switching times vs. gate resistance

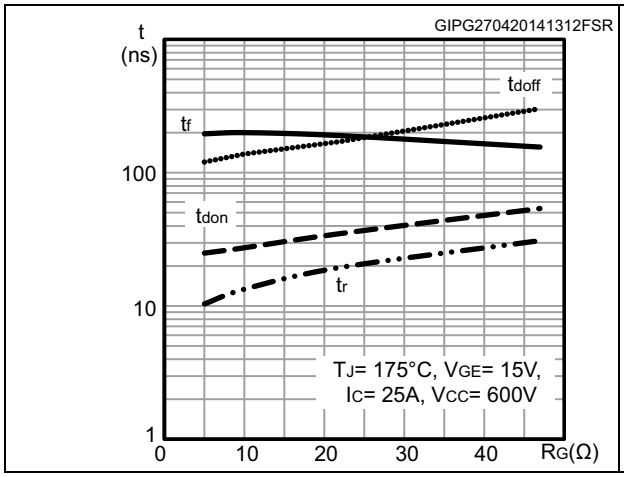

Figure 21. Reverse recovery current vs. diode current slope

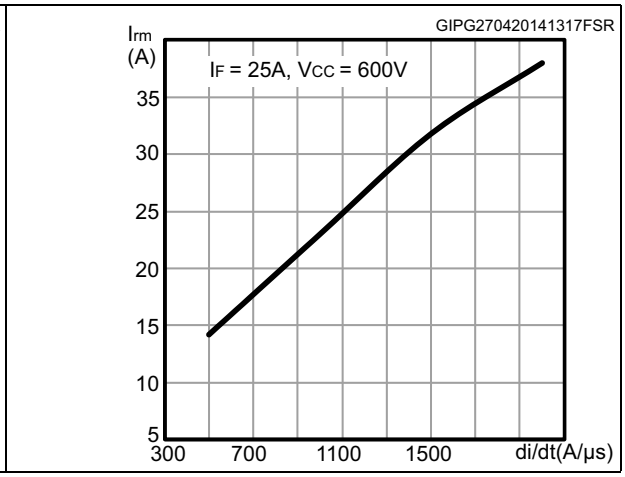

Figure 22. Reverse recovery time vs. diode current slope

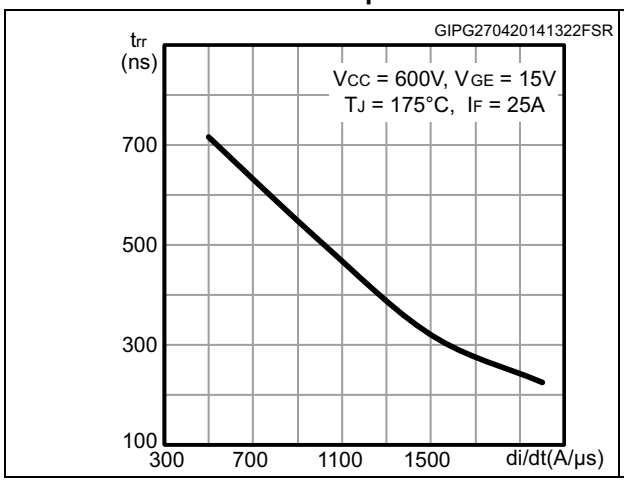

Figure 23. Reverse recovery charge vs. diode current slope

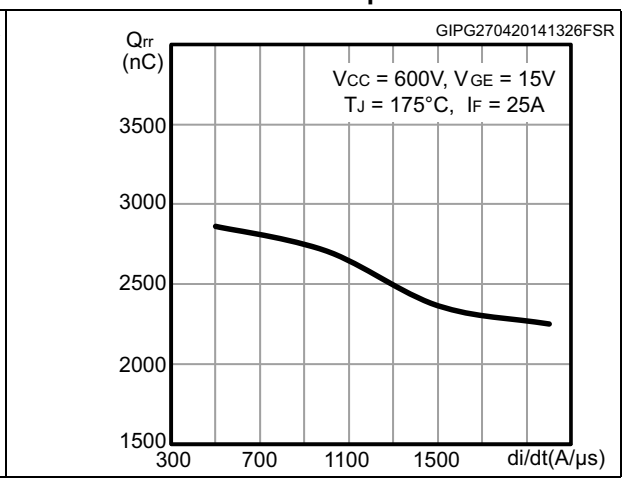

Figure 24. Reverse recovery energy vs. diode current slope

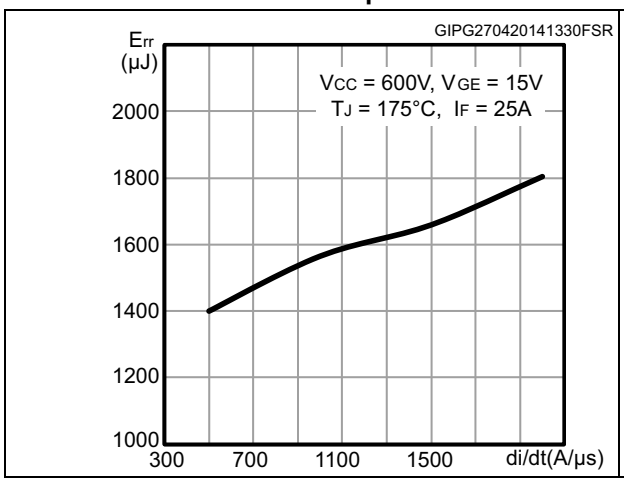

Figure 25. Diode V_F vs. forward current

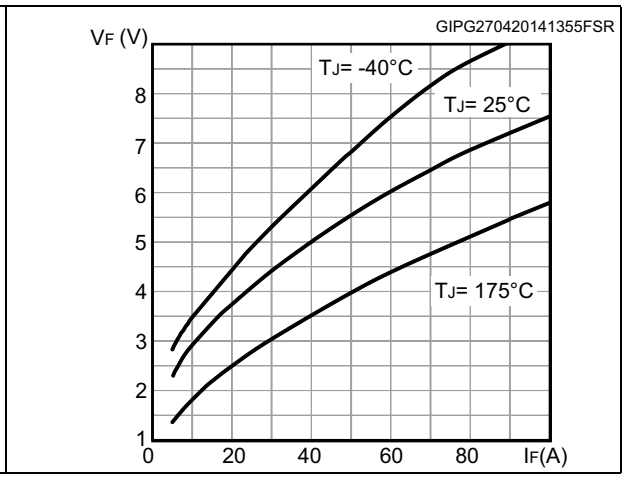

Figure 26. Thermal impedance for IGBT

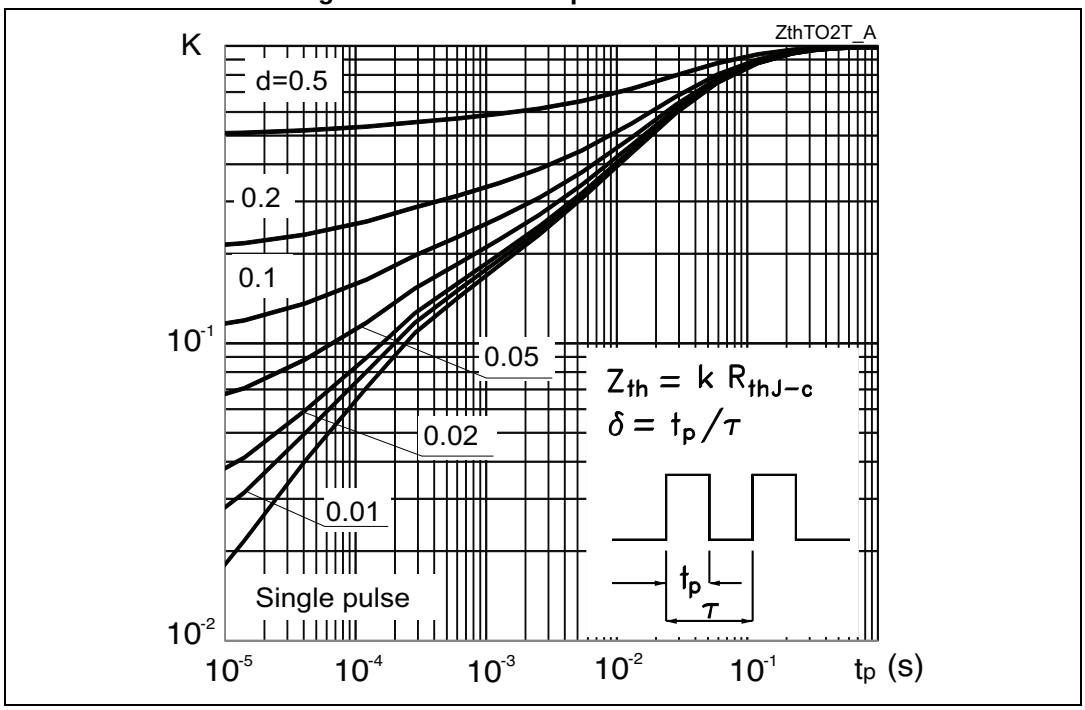

Figure 27. Thermal impedance for diode

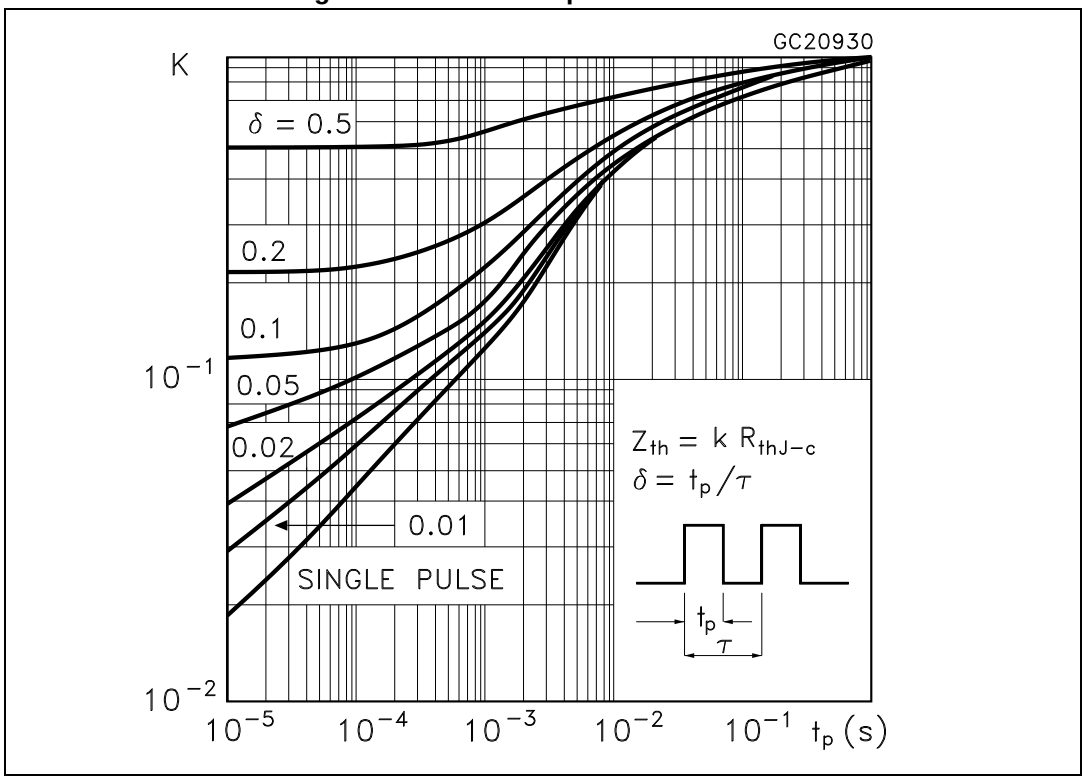

3 Test circuits

Figure 28. Test circuit for inductive load switching

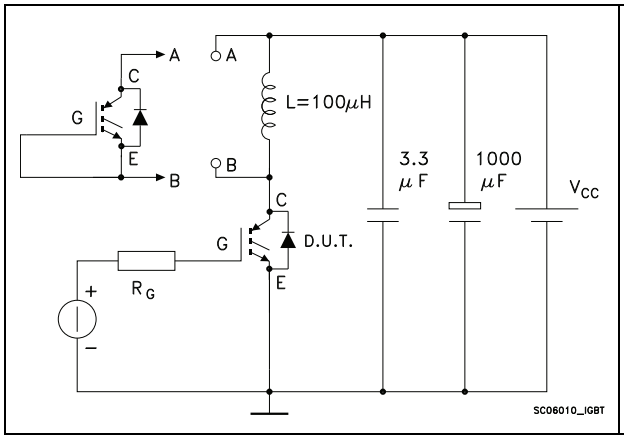

Figure 29. Gate charge test circuit

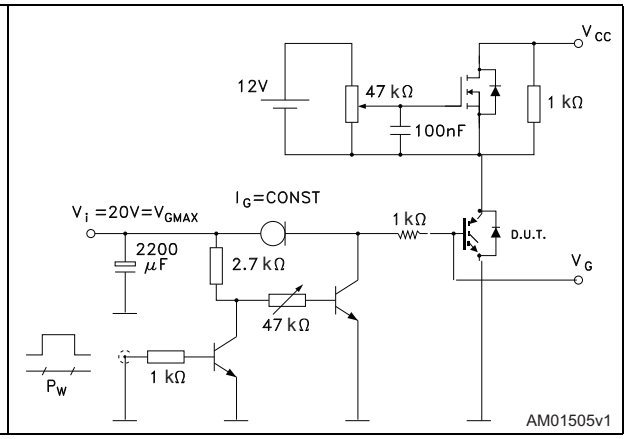

Figure 30. Switching waveform

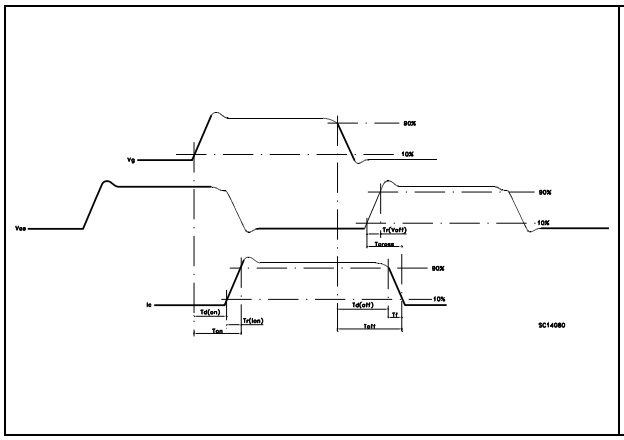

Figure 31. Diode reverse recovery waveform

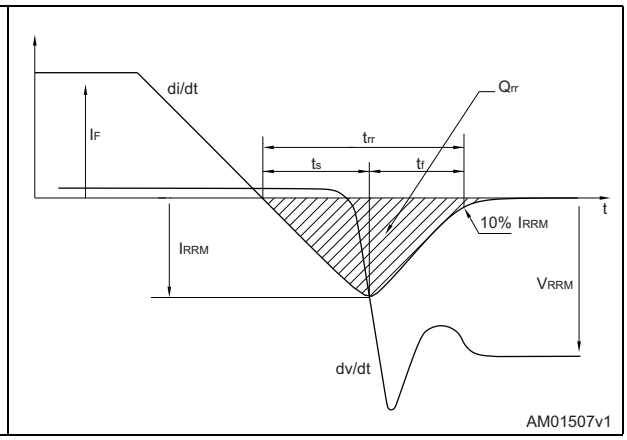

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

4.1 TO-247, package information

Figure 32. TO-247 outline

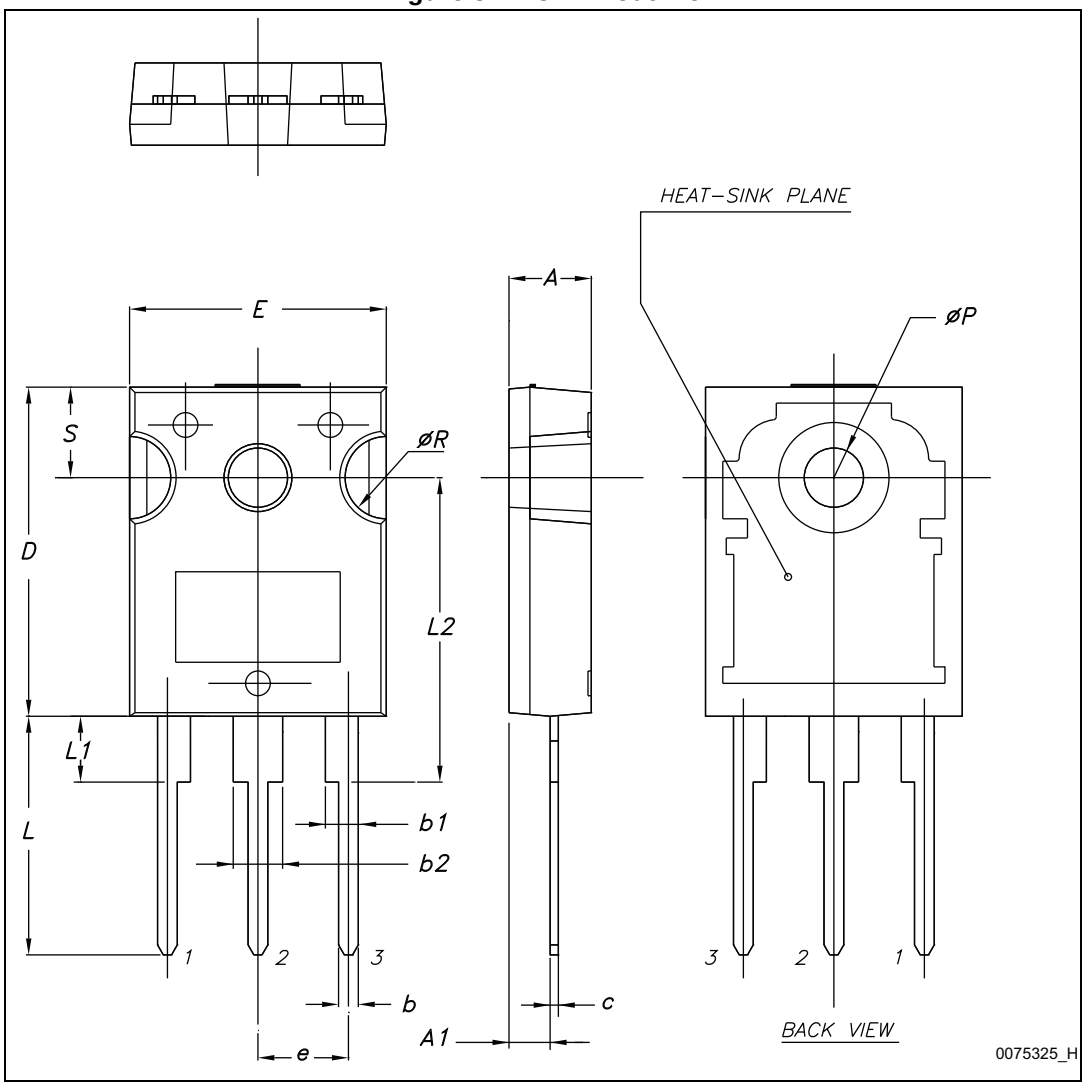

Table 8. TO-247 mechanical data

Dim.	mm.		
	Min.	Typ.	Max.
A	4.85		5.15
A1	2.20		2.60
b	1.0		1.40
b1	2.0		2.40
b2	3.0		3.40
c	0.40		0.80
D	19.85		20.15
E	15.45		15.75
e	5.30	5.45	5.60
L	14.20		14.80
L1	3.70		4.30
L2		18.50	
∅P	3.55		3.65
∅R	4.50		5.50
S	5.30	5.50	5.70

4.2 TO-247 long leads, package information

Figure 33. TO-247 long leads outline

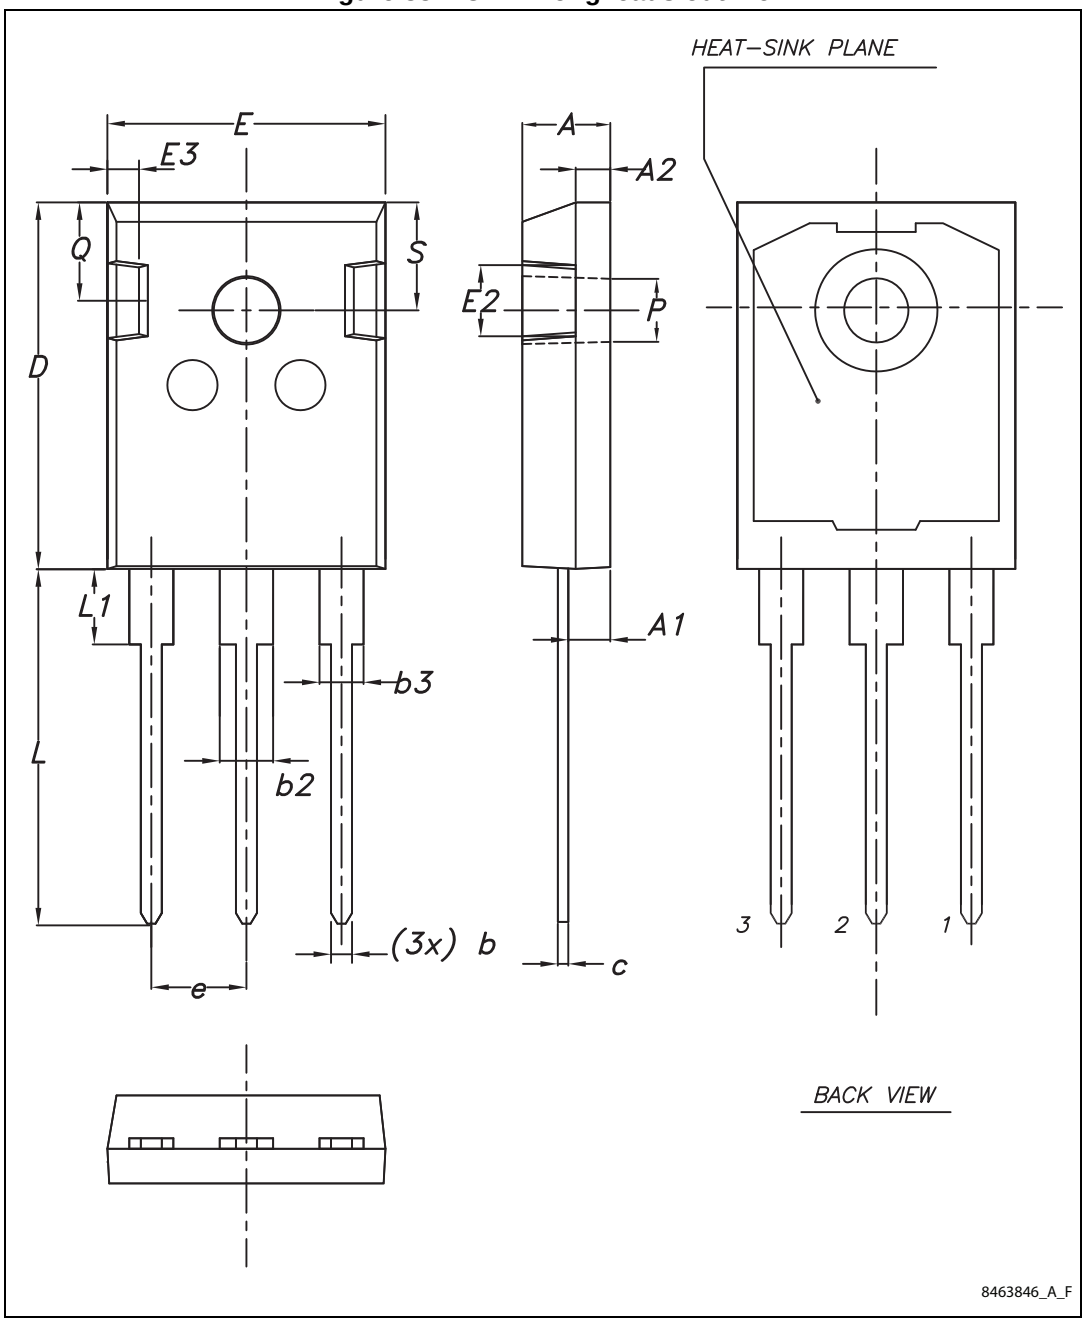

Table 9. TO-247 long leads mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
b	1.16		1.26
b2			3.25
b3			2.25
c	0.59		0.66
D	20.90	21.00	21.10
E	15.70	15.80	15.90
E2	4.90	5.00	5.10
E3	2.40	2.50	2.60
e	5.34	5.44	5.54
L	19.80	19.92	20.10
L1			4.30
P	3.50	3.60	3.70
Q	5.60		6.00
S	6.05	6.15	6.25

5 Revision history

Table 10. Document revision history

Date	Revision	Changes
03-Oct-2012	1	Initial release.
28-Feb-2014	2	Updated title and features in cover page. Minor text changes.
31-Mar-2014	3	Document status promoted from preliminary to production data. Updated *Table 4: Static characteristics* and *Table 6: IGBT switching characteristics (inductive load)*. Added *Section 2.1: Electrical characteristics (curves)*.
06-Mar-2015	4	Added *4.2: TO-247 long leads, package information* Minor text changes.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved