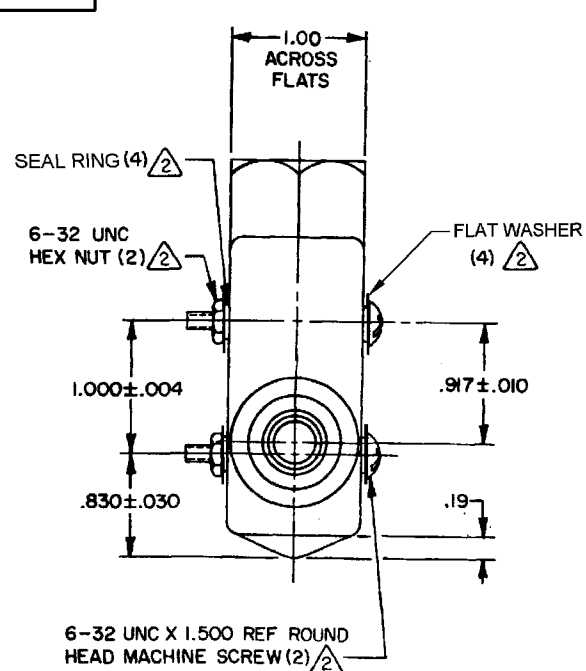


HONEYWELL
PART NUMBER


BME6-2RN373

REV	DOCUMENT	CHANGED BY	CHECK
B	0038308	KVS 01APR08	ASD

ELASTOMER PLUNGER SEAL SECURED TO
COMPONENTS BY EXTERNAL BANDING

HARDENED STEEL PLUNGER

.47 SPHERICAL R

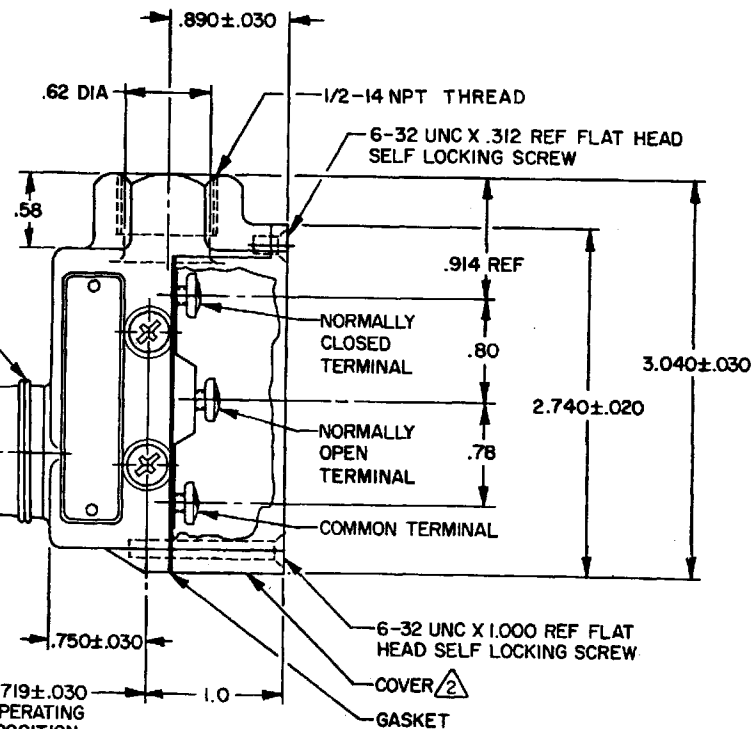.078 MAX
PRETRAVEL1.719 ± .030
OPERATING
POSITION

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
FURNISHED UNASSEMBLED
- 2 - SEAL RATING : NEMA 1,3,4
IP66

CHARACTERISTICS

OPERATING FORCE ----- 9-24 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .002 MAX
OVERTRAVEL ----- .219 MIN
BASIC SWITCH REPLACEMENT ----- BM-2RN 77

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

L268

22A-125, 250 OR 480 VAC
1/2A-125 VDC; 1/4A-250 VDC



DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	—
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	—
ANGLES			—

THIRD ANGLE PROJECTION



DRAWN	SSK	04FEB08
CHECK	BLR	04FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell

TITLE

SWITCH - ENCLOSED

SIZE	TYPE	DRAWING NAME	REV
B	I	BME6-2RN373	B
SCALE	-	SHEET	1 OF 1