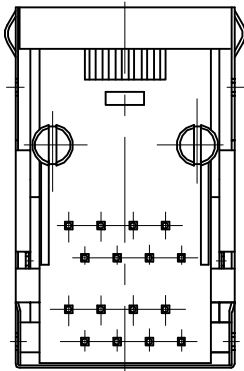
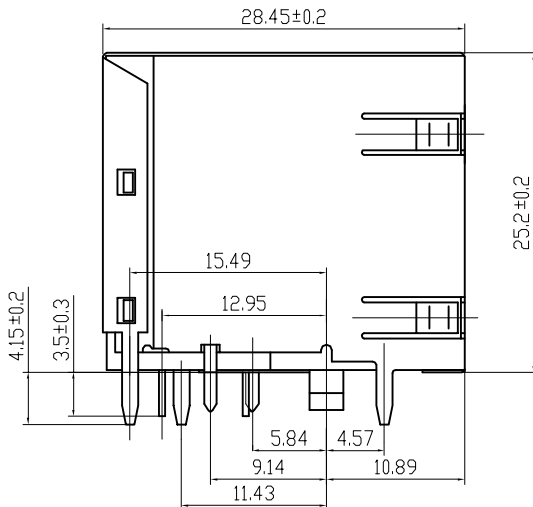
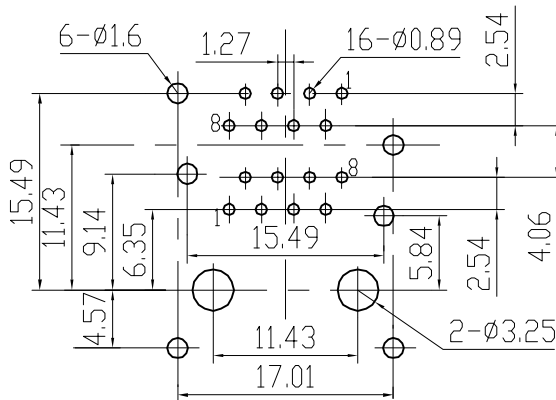


1				2				3				4				5			
												<p>TECHNICAL CHARACTERISTICS</p> <p>MATERIAL</p> <p>INSULATOR MATERIAL: PBT</p> <p>COLOUR: BLACK</p> <p>CONTACT MATERIAL: COPPER ALLOY</p> <p>CONTACT TYPE: STAMPED</p> <p>CONTACT PLATING: GOLD</p> <p>SHIELDING: BRONZE NI PLATED</p> <p>QUALITY CLASS: 500 MATING CYCLES</p> <p>ENVIRONMENTAL</p> <p>OPERATING TEMPERATURE: -25 °C UP TO 85 °C</p> <p>FLAMMABILITY RATING UL94-V0</p> <p>COMPLIANCE: LEAD FREE AND ROHS</p> <p>ELECTRICAL</p> <p>CURRENT RATING: 1.5 A</p> <p>WORKING VOLTAGE: 125 VAC</p> <p>INSULATION RESISTANCE: >1000 MOHM</p> <p>DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN</p> <p>CONTACT RESISTANCE: 20 mOHM MAX</p> <p>SOLDERING</p> <p>WAVE PROCESS ONLY</p> <p>PACKAGING</p> <p>TRAY</p>							
