

# Circular Connectors Conforming to JIS C 5432

## JR Series



### ■ Features

1. These round connectors conform to JIS C 5432 "Circular connectors for electric appliances."

### ■ Product Specifications

| Ratings | Rated current | Shell size | Number of contacts | Rated current                          |
|---------|---------------|------------|--------------------|----------------------------------------|
|         |               | 13         | 3                  | 10A                                    |
|         |               |            | 5                  | 5A                                     |
|         |               | 16         | 7                  | 10A                                    |
|         |               |            | 10, 14             | 5A                                     |
|         |               | 21         | 10                 | 10A                                    |
|         |               |            | 16                 | 5A (Crimp type: 3A)                    |
|         |               |            | 26                 | 5A (Contact numbers A and B only: 10A) |
|         |               | 25         | 4                  | 30A                                    |
|         |               |            | 5, 16              | 10A                                    |
|         |               |            | 24                 | 5A (Crimp type: 3A)                    |

| Ratings | Rated voltage | Shell size | Number of contacts | Rated current                     |
|---------|---------------|------------|--------------------|-----------------------------------|
|         |               | 13         | 3, 5               | AC250, DC350V                     |
|         |               | 16         | 7, 10, 14          | AC250, DC350V                     |
|         |               | 21         | 10, 16, 26         | AC250, DC350V                     |
|         |               | 25         | 4, 5<br>16, 24     | AC1000V, DC1400V<br>AC250, DC350V |

| Ratings | Operating temperature range | -25 to 85°C |
|---------|-----------------------------|-------------|
|         | Storage temperature range   | -10 to 60°C |

| Items                    | Specifications                                                                                        | Conditions                                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 1. Contac resistance     | 5 mΩ max.<br>JR 21-16 contact crimping type: 10 mΩ max.<br>JR 25-24 contact crimping type: 10 mΩ max. | Measured at DC 1 A                                                                                                                     |
| 2. Insulation resistance | 1,000 MΩ min.<br>JR 25-4 and 5 contacts: 10,000 mΩ min.                                               | Measured at DC 500 V                                                                                                                   |
| 3. Withstanding voltage  | No flashover or dielectric breakdown.                                                                 | AC 1,000 V for one minute<br>JR 25-4, 5 contacts: AC 3,000 V for one minute                                                            |
| 4. Vibration resistance  | No electrical discontinuity for 10 μs or greater                                                      | 10 to 55 Hz/cycle, amplitude: 0.75 mm, 3 directions, 2 hours each                                                                      |
| 5. Shock resistance      | No electrical discontinuity for 10 μs or greater                                                      | Acceleration: 490 m/s <sup>2</sup> , duration: 11 ms, 3 axis directions, 3 cycles each                                                 |
| 6. Mating cycles         | Contact resistance: 10 mΩ max.                                                                        | 500 times                                                                                                                              |
| 7. Temperature cycle     | Insulation resistance: 1,000 MΩ min.<br>JR 25-4 and 5 contacts: Insulation resistance: 10,000 MΩ min. | -40°C: 30 minutes → Normal temperature: 10 to 15 minutes → 100°C: 30 minutes → Normal temperature: 10 to 15 minutes, left for 5 cycles |
| 8. Moisture resistance   | Insulation resistance (when dry) 100 MΩ min.<br>5,000 MΩ min. : JR 25-4 , 5 contacts                  | Temperature: 40°C, relative humidity: 90 to 95%, left for 96 hours                                                                     |

### ■ Materials

| Part      | Material                  | Finish         | Remarks |
|-----------|---------------------------|----------------|---------|
| Shell     | Aluminum alloy            | Nickel plating | ————    |
| Insulator | Phenol resin<br>PPS resin | ————           | UL94V-0 |
| Contact   | Copper alloy              | Silver plating | ————    |

## Ordering Information


**JR 16 P A - 10 S C (\*\*)**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

|                                                                                                                                                                                                   |                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| ① Model name: JR Series                                                                                                                                                                           | ⑤ Number of contacts                                                                  |
| ② Shell size: The shell size is the outer shell diameter of the mating end of the plug.                                                                                                           | ⑥ Contact form<br>P: Male contact<br>S: Female contact                                |
| ③ Shell type<br>P : Threaded lock plug      J : Threaded lock jack<br>R : Threaded lock receptacle    BP : Bayonet-lock plug<br>RC : Threaded lock receptacle cap    BR : Bayonet-lock receptacle | ⑦ Contact termination method:<br>None : Solder termination<br>C : Crimp termination   |
| ④ Shell variation: Letters such as A, B, C, etc. indicate variations in the shell.                                                                                                                | ⑧ Other specifications: A two-digit number is added to indicate other specifications. |

## Solder Type


### Threaded lock plug

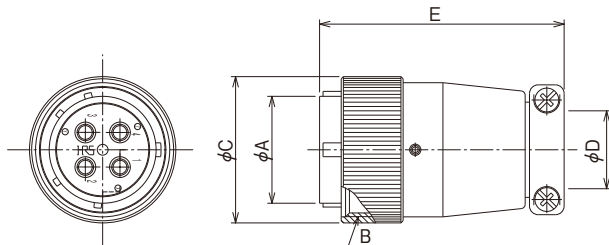

| HRS No.       | Part No.       | No. of contacts | φA   | B     | φC   | φD   | E    | JIS No.        |
|---------------|----------------|-----------------|------|-------|------|------|------|----------------|
| 114-0501-7 71 | JR13PK-3P(71)  | 3               | 12.7 | M18×1 | 21.8 | 8.5  | 45.5 | CNR01SPM013003 |
| 114-0502-0 71 | JR13PK-5P(71)  | 5               |      |       |      |      |      | CNR01SPM013005 |
| 114-0503-2 71 | JR16PK-7P(71)  | 7               | 16.3 | M22×1 | 25.8 | 11.5 | 49.5 | CNR01SPM016007 |
| 114-0504-5 71 | JR16PK-10P(71) | 10              |      |       |      |      |      | CNR01SPM016010 |
| 114-0505-8 71 | JR21PK-10P(71) | 10              | 20.5 | M26×1 | 29.8 | 15   | 53.5 | CNR01SPM021010 |
| 114-0506-0 71 | JR21PK-16P(71) | 16              |      |       |      |      |      | CNR01SPM021016 |
| 114-0507-3 71 | JR25PK-16P(71) | 16              | 24.7 | M30×1 | 33.8 | 18   | 56.5 | CNR01SPM025016 |
| 114-0508-6 71 | JR25PK-24P(71) | 24              |      |       |      |      |      | CNR01SPM025024 |
| 114-0626-2    | JR25PH-4P      | 4               |      |       |      |      |      | —              |
| 114-0624-7    | JR25PH-5P      | 5               |      |       |      |      |      | —              |
| 114-0509-9 71 | JR13PK-3S(71)  | 3               | 12.7 | M18×1 | 21.8 | 8.5  | 45.5 | CNR01SPF013003 |
| 114-0510-8 71 | JR13PK-5S(71)  | 5               |      |       |      |      |      | CNR01SPF013005 |
| 114-0511-0 71 | JR16PK-7S(71)  | 7               | 16.3 | M22×1 | 25.8 | 11.5 | 49.5 | CNR01SPF016007 |
| 114-0512-3 71 | JR16PK-10S(71) | 10              |      |       |      |      |      | CNR01SPF016010 |
| 114-0513-6 71 | JR21PK-10S(71) | 10              | 20.5 | M26×1 | 29.8 | 15   | 53.5 | CNR01SPF021010 |
| 114-0514-9 71 | JR21PK-16S(71) | 16              |      |       |      |      |      | CNR01SPF021016 |
| 114-0515-1 71 | JR25PK-16S(71) | 16              | 24.7 | M30×1 | 33.8 | 18   | 56.5 | CNR01SPF025016 |
| 114-0516-4 71 | JR25PK-24S(71) | 24              |      |       |      |      |      | CNR01SPF025024 |
| 114-0627-5    | JR25PH-4S      | 4               |      |       |      |      |      | —              |

## ■Solder Type


### ●Threaded lock receptacle

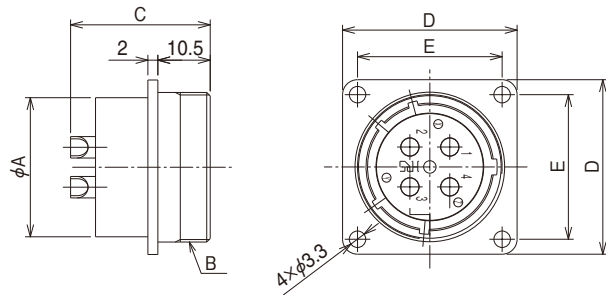

| HRS No.    | Part No.   | No. of contacts | $\phi A$ | B     | C    | D  | E  | JIS No.        |
|------------|------------|-----------------|----------|-------|------|----|----|----------------|
| 114-0517-7 | JR13RK-3P  | 3               | 15.9     | M18×1 | 26.6 | 26 | 20 | CNR01SRM013003 |
| 114-0518-0 | JR13RK-5P  | 5               |          |       | 26.1 |    |    | CNR01SRM013005 |
| 114-0519-2 | JR16RK-7P  | 7               | 19.9     | M22×1 | 26.6 | 29 | 23 | CNR01SRM016007 |
| 114-0520-1 | JR16RK-10P | 10              |          |       | 26.1 |    |    | CNR01SRM016010 |
| 114-0521-4 | JR21RK-10P | 10              | 23.9     | M26×1 | 26.6 | 32 | 26 | CNR01SRM021010 |
| 114-0522-7 | JR21RK-16P | 16              |          |       | 26.1 |    |    | CNR01SRM021016 |
| 114-0523-0 | JR25RK-16P | 16              | 27.9     | M30×1 | 26.6 | 35 | 29 | CNR01SRM025016 |
| 114-0524-2 | JR25RK-24P | 24              |          |       | 26.1 |    |    | CNR01SRM025024 |
| 114-0628-8 | JR25RH-4P  | 4               |          |       | 28   |    |    | —              |
| 114-0525-5 | JR13RK-3S  | 3               |          |       | 28   |    |    | CNR01SRF013003 |
| 114-0526-8 | JR13RK-5S  | 5               | 15.9     | M18×1 | 27   | 26 | 20 | CNR01SRF013005 |
| 114-0527-0 | JR16RK-7S  | 7               | 19.9     | M22×1 | 28   | 29 | 23 | CNR01SRF016007 |
| 114-0528-3 | JR16RK-10S | 10              |          |       | 27   |    |    | CNR01SRF016010 |
| 114-0529-6 | JR21RK-10S | 10              | 23.9     | M26×1 | 28   | 32 | 26 | CNR01SRF021010 |
| 114-0530-5 | JR21RK-16S | 16              |          |       | 27   |    |    | CNR01SRF021016 |
| 114-0531-8 | JR25RK-16S | 16              | 27.9     | M30×1 | 28   | 35 | 29 | CNR01SRF025016 |
| 114-0532-0 | JR25RK-24S | 24              |          |       | 27   |    |    | CNR01SRF025024 |
| 114-0629-0 | JR25RH-4S  | 4               |          |       | 28   |    |    | —              |
| 114-0625-0 | JR25RH-5S  | 5               |          |       | 27.8 |    |    | —              |

## ■Solder Type


### ●Threaded lock jack

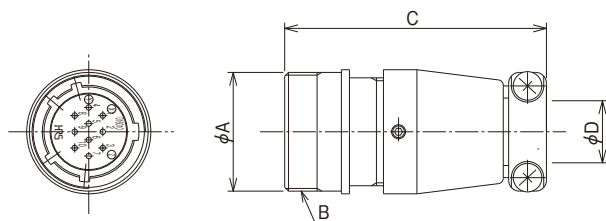

| HRS No.    | Part No.   | No. of contacts | $\phi A$ | B     | C    | $\phi D$ |
|------------|------------|-----------------|----------|-------|------|----------|
| 114-0533-3 | JR13JK-3P  | 3               | 19       | M18×1 | 44.5 | 8.5      |
| 114-0534-6 | JR13JK-5P  | 5               |          |       |      |          |
| 114-0535-9 | JR16JK-7P  | 7               | 23       | M22×1 | 48.5 | 11.5     |
| 114-0536-1 | JR16JK-10P | 10              |          |       |      |          |
| 114-0537-4 | JR21JK-10P | 10              | 27       | M26×1 | 52.5 | 15       |
| 114-0538-7 | JR21JK-16P | 16              |          |       |      |          |
| 114-0539-0 | JR25JK-16P | 16              | 31       | M30×1 | 55.5 | 18       |
| 114-0540-9 | JR25JK-24P | 24              |          |       |      |          |
| 114-0541-1 | JR13JK-3S  | 3               | 19       | M18×1 | 44.5 | 8.5      |
| 114-0542-4 | JR13JK-5S  | 5               |          |       |      |          |
| 114-0543-7 | JR16JK-7S  | 7               | 23       | M22×1 | 48.5 | 11.5     |
| 114-0544-0 | JR16JK-10S | 10              |          |       |      |          |
| 114-0545-2 | JR21JK-10S | 10              | 27       | M26×1 | 52.5 | 15       |
| 114-0546-5 | JR21JK-16S | 16              |          |       |      |          |
| 114-0548-0 | JR25JK-24S | 24              | 31       | M30×1 | 55.5 | 18       |


## ■Crimp Type

### ●Threaded lock plug

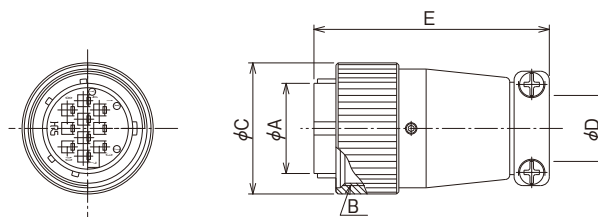


| HRS No.       | Part No.        | No. of contacts | ϕA   | B     | ϕC   | ϕD | E    | Remarks      |
|---------------|-----------------|-----------------|------|-------|------|----|------|--------------|
| 114-0570-0 71 | JR21PK-10PC(71) | 10              | 20.5 | M26×1 | 29.8 | 15 | 53.5 | Contact ϕ1.6 |
| 114-0571-2 71 | JR21PK-10SC(71) |                 |      |       |      |    |      | Contact ϕ1   |
| 114-0572-5 71 | JR21PK-16PC(71) | 16              |      |       |      |    |      |              |
| 114-0573-8 71 | JR21PK-16SC(71) |                 |      |       |      |    |      |              |
| 114-0574-0 71 | JR25PK-24PC(71) | 24              | 24.7 | M30×1 | 33.8 | 18 | 56.5 | Contact ϕ1   |
| 114-0575-3 71 | JR25PK-24SC(71) |                 |      |       |      |    |      |              |

### ●Threaded lock receptacle

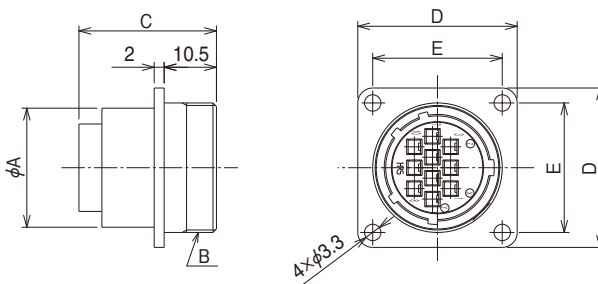

| HRS No.    | Part No.    | No. of contacts | ϕA   | B     | C    | D  | E  | Remarks      |
|------------|-------------|-----------------|------|-------|------|----|----|--------------|
| 114-0577-9 | JR21RK-10SC | 10              | 23.9 | M26×1 | 27.6 | 32 | 26 | Contact ϕ1.6 |
| 114-0578-1 | JR21RK-16PC | 16              |      |       | 25.4 |    |    | Contact ϕ1   |
| 114-0579-4 | JR21RK-16SC |                 |      |       | 23   |    |    |              |
| 114-0581-6 | JR25RK-24SC | 24              | 27.9 | M30×1 | 23   | 35 | 29 |              |


### ●Threaded lock receptacle cap

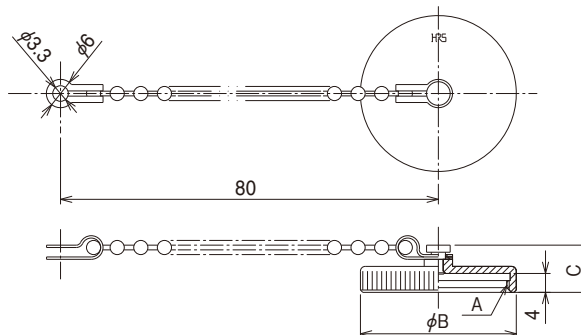

| HRS No.       | Part No.    | A     | ϕB | C  | JIS No.    |
|---------------|-------------|-------|----|----|------------|
| 114-0053-8 71 | JRC13RC(71) | M18×1 | 21 | 10 | CNR01RC013 |
| 114-0054-0 71 | JRC16RC(71) | M22×1 | 25 |    | CNR01RC016 |
| 114-0055-3 71 | JRC21RC(71) | M26×1 | 29 |    | CNR01RC021 |
| 114-0056-6 71 | JRC25RC(71) | M30×1 | 33 |    | CNR01RC025 |


## ■ Solder Type

### ● Bayonet - lock plug

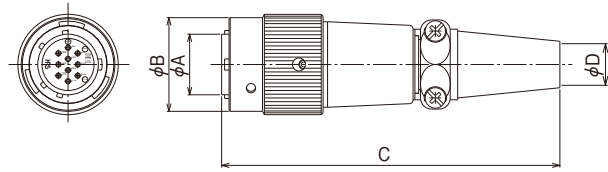

| HRS No.       | Part No.         | No. of contacts | ϕA   | ϕB | C  | ϕD   |
|---------------|------------------|-----------------|------|----|----|------|
| 114-0253-7 71 | JRC16BP-7P(71)   | 7               | 16.3 | 27 | 91 | 11.2 |
| 114-0252-4 71 | JRC16BP-10P(71)  | 10              |      |    |    |      |
| 114-0251-1 71 | JRC16BP-14P(71)  | 14              |      |    |    |      |
| 114-0268-4 71 | JRC21BPA-26P(71) | 26              | 20.5 | 31 | 98 | 12.2 |
| 114-0256-5 71 | JRC16BP-7S(71)   | 7               | 16.3 | 27 | 91 | 11.2 |
| 114-0254-0 71 | JRC16BP-14S(71)  | 14              |      |    |    |      |
| 114-0267-1 71 | JRC21BP-26S(71)  | 26              | 20.5 | 31 | 98 | 12.2 |

### ● Bayonet - lock receptacle

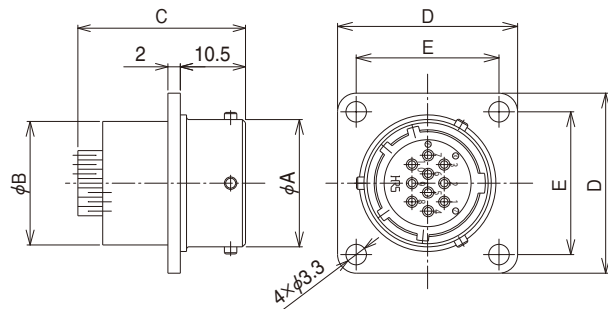


| HRS No.       | Part No.        | No. of contacts | ϕA   | ϕB   | C    | D  | E  |
|---------------|-----------------|-----------------|------|------|------|----|----|
| 114-0259-3 71 | JRC16BR-7P(71)  | 7               | 20.5 | 19.9 | 26.5 | 29 | 23 |
| 114-0257-8 71 | JRC16BR-14P(71) | 14              |      |      | 26.6 |    |    |
| 114-0269-7 71 | JRC21BR-26P(71) | 26              | 25.8 | 23.9 | 26.8 | 32 | 26 |
| 114-0262-8 71 | JRC16BR-7S(71)  | 7               | 20.5 | 19.9 | 27.7 | 29 | 23 |
| 114-0261-5 71 | JRC16BR-10S(71) | 10              |      |      | 26.5 |    |    |
| 114-0260-2 71 | JRC16BR-14S(71) | 14              |      |      | 25.8 |    |    |
| 114-0270-6    | JRC21BRA-26S    | 26              | 25.8 | 23.9 | 28   | 32 | 26 |

## ◆Crimp Contacts


Contact diameter  $\phi 1.0\text{mm}$

### Male contact

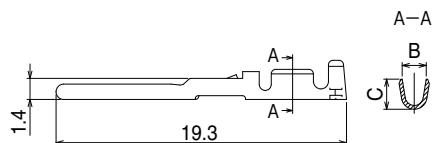

| Type          | HRS No.    | Part No.    | B    | C   | Applicable wire |
|---------------|------------|-------------|------|-----|-----------------|
| Loose contact | 114-0243-3 | JRC-PC2-112 | 1.6  | 2.0 | AWG#20~24       |
|               | 114-0244-6 | JRC-PC2-122 | 1.45 | 1.5 | AWG#24~28       |
| Reel contact  | 114-0245-9 | JRC-PC2-212 | 1.6  | 2.0 | AWG#20~24       |
|               | 114-0246-1 | JRC-PC2-222 | 1.45 | 1.5 | AWG#24~28       |

### Female contact

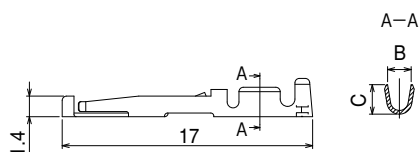


| Type          | HRS No.    | Part No.    | B    | C   | Applicable wire |
|---------------|------------|-------------|------|-----|-----------------|
| Loose contact | 114-0247-4 | JRC-SC2-112 | 1.6  | 2.0 | AWG#20~24       |
|               | 114-0248-7 | JRC-SC2-122 | 1.45 | 1.5 | AWG#24~28       |
| Reel contact  | 114-0249-0 | JRC-SC2-212 | 1.6  | 2.0 | AWG#20~24       |
|               | 114-0250-9 | JRC-SC2-222 | 1.45 | 1.5 | AWG#24~28       |

Note: Loose contact in pack of 100 pcs. Reel contact contains 8,000 pcs.


Contact diameter  $\phi 1.6\text{mm}$

### Male contact

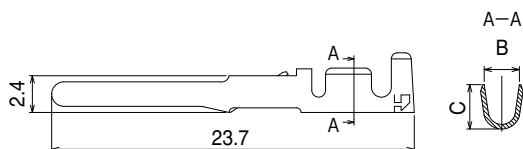

| Type          | HRS No.    | Part No.   | B   | C   | Applicable wire |
|---------------|------------|------------|-----|-----|-----------------|
| Loose contact | 114-0239-6 | JRC-PC-112 | 2.3 | 2.9 | AWG#16~20       |
| Reel contact  | 114-0240-5 | JRC-PC-212 |     |     |                 |

### Female contact

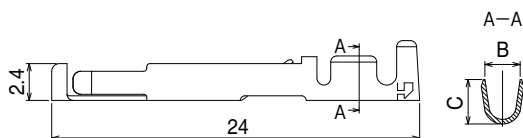

| Type          | HRS No.    | Part No.   | B   | C   | Applicable wire |
|---------------|------------|------------|-----|-----|-----------------|
| Loose contact | 114-0241-8 | JRC-SC-112 | 2.3 | 2.9 | AWG#16~20       |
| Reel contact  | 114-0242-0 | JRC-SC-212 |     |     |                 |

Note: Loose contact in pack of 100 pcs. Reel contact contains 5,000 pcs.

## ◆ Applicable Tools

| Contact dia. | Type      | Item                    | HRS No.    | Part No.     | Applicable terminal        | Applicable wire |
|--------------|-----------|-------------------------|------------|--------------|----------------------------|-----------------|
| φ1           | Manual    | Manual crimping tool    | 150-0006-1 | RM-TC-11     | JRC-PC2-112<br>JRC-SC2-112 | AWG#20~24       |
|              |           | Automatic crimping tool | 150-0007-4 | RM-TC-12     | JRC-PC2-122<br>JRC-SC2-122 | AWG#24~28       |
|              | Automatic | Applicator              | 901-0005-4 | CM-105       | —————                      | —————           |
|              |           |                         | 901-2037-1 | AP105-JRC2-1 | JRC-PC2-212<br>JRC-SC2-212 | AWG#20~24       |
|              |           |                         | 901-2038-4 | AP105-JRC2-2 | JRC-PC2-222<br>JRC-SC2-222 | AWG#24~28       |
|              | Extractor |                         | 150-0008-7 | RM-TP        | —————                      | —————           |
| φ1.6         | Manual    | Manual crimping tool    | 150-0033-4 | JRC-TC-11    | JRC-PC-112<br>JRC-SC-112   | AWG#16          |
|              |           |                         | 150-0034-7 | JRC-TC-12    | JRC-PC-112<br>JRC-SC-112   | AWG#18~20       |
|              | Automatic | Automatic crimping tool | 901-0005-4 | CM-105       | —————                      | —————           |
|              |           | Applicator              | 901-2039-7 | AP105-JRC-1  | JRC-PC-212<br>JRC-SC-212   | AWG#16~20       |
|              | Extractor |                         | 150-0035-0 | JRC-TP       | —————                      | —————           |

### Hand Tool Crimp



(For Contact Diameter  $\phi 1.0\text{mm}$ )



(For Contact Diameter  $\phi 1.6\text{mm}$ )

### Extraction Tool



(For Contact Diameter  $\phi 1.0\text{mm}$ )















(For Contact Diameter  $\phi 1.6\text{mm}$ )





## ◆ Contact Position Arrangement

|                          |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Shell size               |    |                                                                                     |   |                                                                                       |
| No. of contacts          | 3                                                                                   |                                                                                     | 5                                                                                    |                                                                                       |
| Withstanding voltage     | AC1000V a minute                                                                    |                                                                                     |                                                                                      |                                                                                       |
| Current rating           | 10A                                                                                 |                                                                                     | 5A                                                                                   |                                                                                       |
| Insulation resistance    | 1000MΩ MIN.                                                                         |                                                                                     |                                                                                      |                                                                                       |
| Contact resistance       | 5mΩ MAX.                                                                            |                                                                                     |                                                                                      |                                                                                       |
| Solderpot inner diameter | 1.7mm dia.                                                                          |                                                                                     | 1.1mm dia.                                                                           |                                                                                       |
| Shell size               |    |                                                                                     |    |    |
| No. of contacts          | 7                                                                                   |                                                                                     | 10                                                                                   | 14                                                                                    |
| Withstanding voltage     | AC1000V a minute                                                                    |                                                                                     |                                                                                      |                                                                                       |
| Current rating           | 10A                                                                                 |                                                                                     | 5A                                                                                   |                                                                                       |
| Insulation resistance    | 1000MΩ MIN.                                                                         |                                                                                     |                                                                                      |                                                                                       |
| Contact resistance       | 5mΩ MAX.                                                                            |                                                                                     |                                                                                      |                                                                                       |
| Solderpot inner diameter | 1.7mm dia.                                                                          |                                                                                     |                                                                                      | 1.1mm dia.                                                                            |
| Shell size               |   |                                                                                     |   |   |
| No. of contacts          | 10                                                                                  |                                                                                     | 16                                                                                   | 26                                                                                    |
| Withstanding voltage     | AC1000V a minute                                                                    |                                                                                     |                                                                                      |                                                                                       |
| Current rating           | 10A                                                                                 |                                                                                     | 5A (crimp type 3A)                                                                   | 5A 10A (only A, B)                                                                    |
| Insulation resistance    | 1000MΩ MIN.                                                                         |                                                                                     |                                                                                      |                                                                                       |
| Contact resistance       | 5mΩ MAX.                                                                            |                                                                                     | 5mΩ MAX. (crimp type 10mΩ)                                                           | 5mΩ MAX.                                                                              |
| Solderpot inner diameter | 1.7mm dia.                                                                          |                                                                                     | 1.1mm dia.                                                                           | 1.7mm dia. (only A, B)                                                                |
| Shell size               |  |  |  |  |
| No. of contacts          | 4                                                                                   | 5                                                                                   | 16                                                                                   | 24                                                                                    |
| Withstanding voltage     | AC3000V a minute                                                                    |                                                                                     | AC1000V a minute                                                                     |                                                                                       |
| Current rating           | 30A                                                                                 | 10A                                                                                 | 5A (crimp type 3A)                                                                   |                                                                                       |
| Insulation resistance    | 10,000MΩ MIN.                                                                       |                                                                                     | 1000MΩ MIN.                                                                          |                                                                                       |
| Contact resistance       | 5mΩ MAX.                                                                            |                                                                                     |                                                                                      | 5mΩ MAX. (crimp type 10mΩ)                                                            |
| Solderpot inner diameter | 3.4mm dia.                                                                          | 1.7mm dia.                                                                          | 1.1mm dia.                                                                           |                                                                                       |

Remarks: 1. Viewed from mating face.

2. The withstand voltage is the test value.



## HIROSE ELECTRIC CO.,LTD.

2-6-3, Nakagawa Chuoh, Tsuzuki-Ku, Yokohama-Shi 224-8540, JAPAN

TEL: +81-45-620-3526 Fax: +81-45-591-3726

<http://www.hirose.com><http://www.hirose-connectors.com>