STL115N10F7AG

Automotive-grade N-channel 100 V, 5 mΩ typ., 107 A, STripFET™ F7 Power MOSFET in a PowerFLAT™ 5x6 package

Datasheet - production data

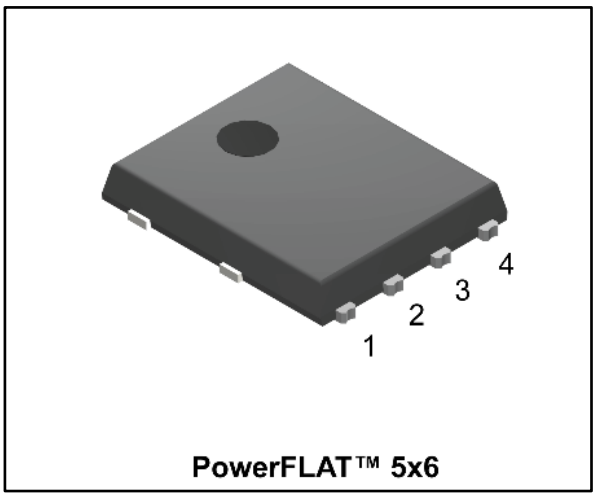

Figure 1: Internal schematic diagram

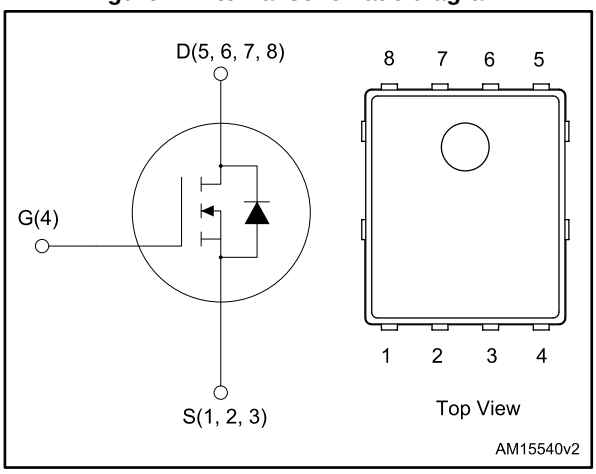

Features

Order code	V_{DS}	$R_{DS(on)}$ max	I_D	P_{TOT}
STL115N10F7AG	100 V	6 mΩ	107 A	136 W

- AEC-Q101 qualified
- Among the lowest $R_{DS(on)}$ on the market
- Excellent FoM (figure of merit)
- Low C_{rss}/C_{iss} ratio for EMI immunity
- High avalanche ruggedness

Applications

- Switching applications

Description

This N-channel Power MOSFET utilizes STripFET™ F7 technology with an enhanced trench gate structure that results in very low on-state resistance, while also reducing internal capacitance and gate charge for faster and more efficient switching.

Table 1: Device summary

Order code	Marking	Package	Packaging
STL115N10F7AG	115N10F7	PowerFLAT™ 5x6	Tape and reel

This is information on a product in full production.

www.st.com

Contents

1 Electrical ratings 3
2 Electrical characteristics 4
2.1 Electrical characteristics (curves) 6
3 Test circuits 8
4 Package information 9
4.1 PowerFLAT™ 5x6 WF type C package information 9
4.2 PowerFLAT™ 5x6 packing information 12
5 Revision history 14

1 Electrical ratings

Table 2: Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DS}	Drain-source voltage	100	V
V_{GS}	Gate-source voltage	±20	V
I_D	Drain current (continuous) at T_C = 25 °C	107	A
I_D	Drain current (continuous) at T_C = 100 °C	75	A
I_{DM} (1)	Drain current (pulsed)	428	A
P_{TOT}	Total dissipation at T_C = 25 °C	136	W
E_{AS} (2)	Single pulse avalanche energy	490	mJ
T_J	Operating junction temperature range	-55 to 175	°C
T_{stg}	Storage temperature range		

Notes:

(1)Pulse width limited by safe operating area

(2)Starting T_j = 25 °C, I_D = 18 A, V_{DD} = 50 V

Table 3: Thermal resistance

Symbol	Parameter	Value	Unit
$R_{thj\text{-}case}$	Thermal resistance junction-case	1.1	°C/W
$R_{thj\text{-}pcb}$ (1)	Thermal resistance junction-pcb	31.3	°C/W

Notes:

(1)When mounted on FR-4 board of 1inch², 2oz Cu, t < 10 s

2 Electrical characteristics

(T_{CASE} = 25 °C unless otherwise specified)

Table 4: On/off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	V_{GS}= 0 V, I_D = 250 µA	100			V
I_{DSS}	Zero gate voltage drain current	V_{GS} = 0 V, V_{DS} = 100 V			1	µA
		V_{GS} = 0 V, V_{DS} = 100 V, T_C = 125 °C(1)			10	
I_{GSS}	Gate body leakage current	V_{DS} = 0 V, V_{GS} = 20 V			100	nA
$V_{GS(th)}$	Gate threshold voltage	V_{DS}= V_{GS}, I_D = 250 µA	2.5		4.5	V
$R_{DS(on)}$	Static drain-source on-resistance	V_{GS}= 10 V, I_D= 53 A		5	6	mΩ

Notes:

(1)Defined by design, not subject to production test.

Table 5: Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	V_{DS} = 50 V, f = 1 MHz, V_{GS} = 0 V	-	5600	-	pF
C_{oss}	Output capacitance		-	1200	-	pF
C_{rss}	Reverse transfer capacitance		-	50	-	pF
Q_g	Total gate charge	V_{DD} = 50 V, I_D = 107 A, V_{GS} = 10 V (see *Figure 14: "Test circuit for gate charge behavior"*)	-	72.5	-	nC
Q_{gs}	Gate-source charge		-	35.5	-	nC
Q_{gd}	Gate-drain charge		-	15	-	nC

Table 6: Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{DD} = 50 V, I_D = 53 A, R_G = 4.7 Ω, V_{GS} = 10 V (see *Figure 13: "Test circuit for resistive load switching times"* and *Figure 18: "Switching time waveform"*)	-	33	-	ns
t_r	Rise time		-	38	-	ns
$t_{d(off)}$	Turn-off delay time		-	48	-	ns
t_f	Fall time		-	20	-	ns

Table 7: Source drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SD}	Source-drain current		-		107	A
I_{SDM}(1)	Source-drain current (pulsed)		-		428	A
V_{SD}(2)	Forward on voltage	I_{SD} = 53 A, V_{GS} = 0 V	-		1.2	V
t_{rr}	Reverse recovery time	I_{SD} = 107 A, di/dt = 100 A/µs, V_{DD} = 80 V, T_j = 150 °C (see *Figure 15: "Test circuit for inductive load switching and diode recovery times"*)	-	60		ns
Q_{rr}	Reverse recovery charge		-	96		nC
I_{RRM}	Reverse recovery current		-	3.2		A

Notes:

(1)Pulse width limited by safe operating area

(2)Pulsed: pulse duration=300 µs, duty cycle 1.5%

2.1 Electrical characteristics (curves)

Figure 2: Safe operating area

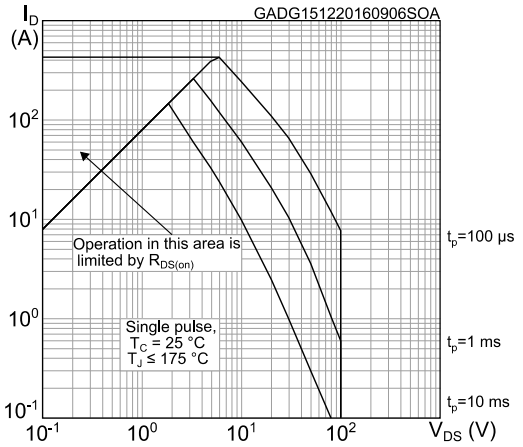

Figure 3: Thermal impedance

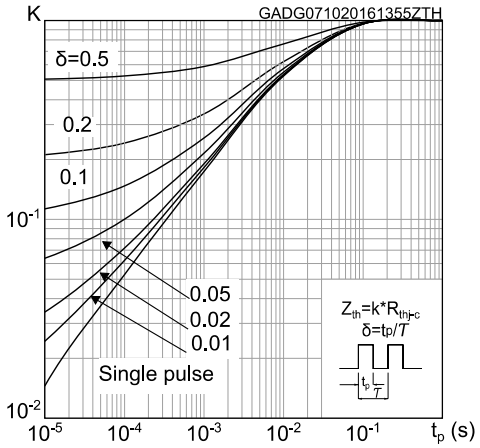

Figure 4: Output characteristics

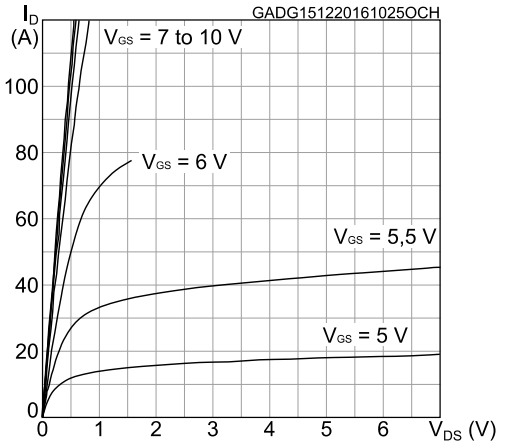

Figure 5: Transfer characteristics

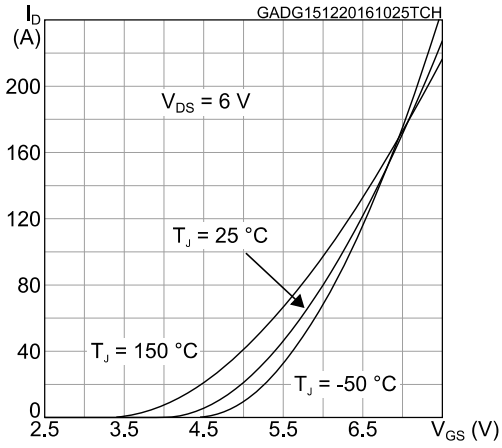

Figure 6: Gate charge vs gate-source voltage

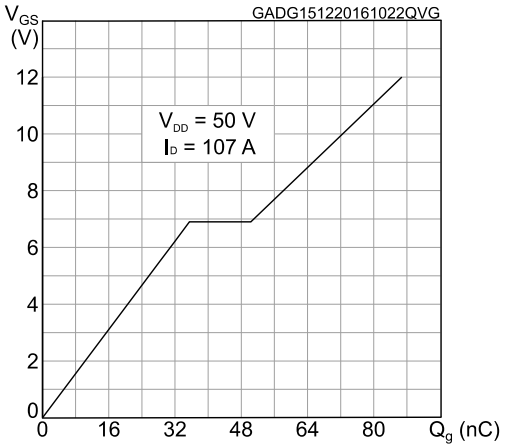

Figure 7: Static drain-source on-resistance

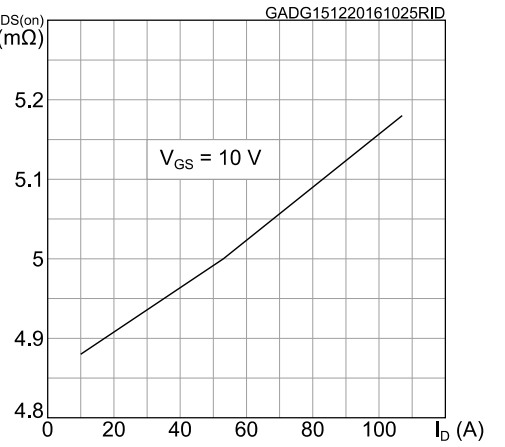

Figure 8: Capacitance variations

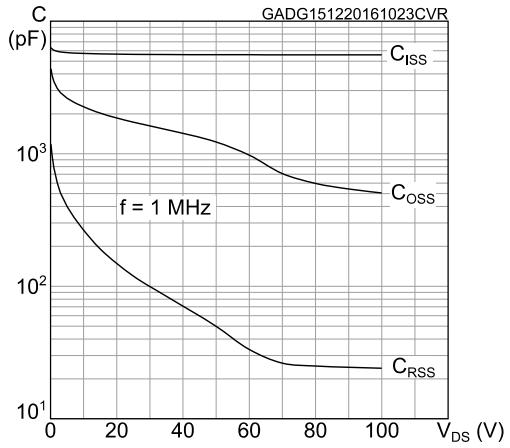

Figure 9: Normalized gate threshold voltage vs temperature

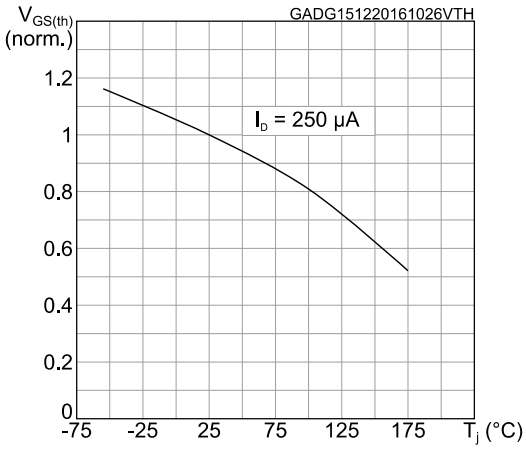

Figure 10: Normalized on-resistance vs temperature

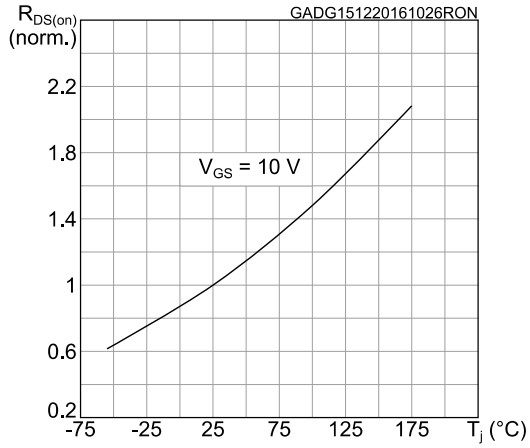

Figure 11: Source-drain diode forward characteristics

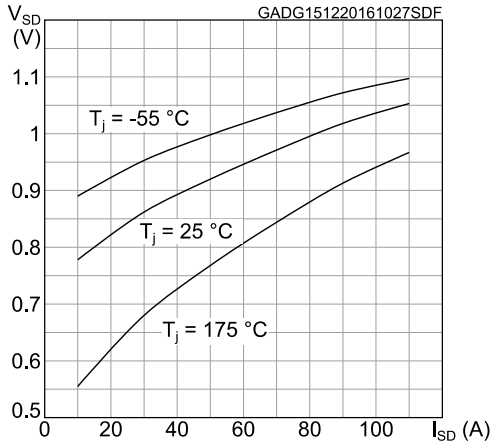

Figure 12: Normalized $V_{(BR)DSS}$ vs temperature

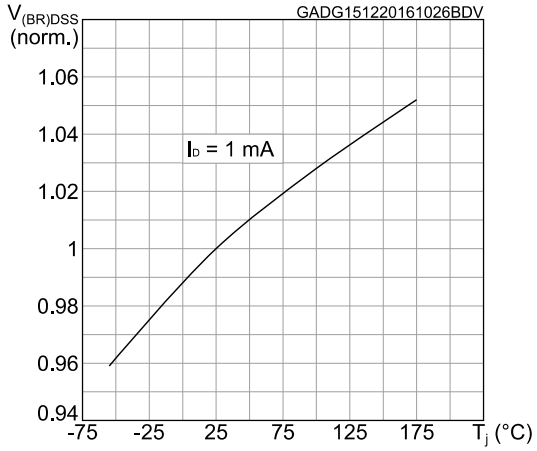

3 Test circuits

Figure 13: Test circuit for resistive load switching times

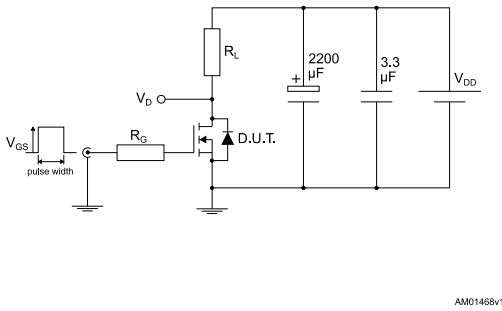

Figure 14: Test circuit for gate charge behavior

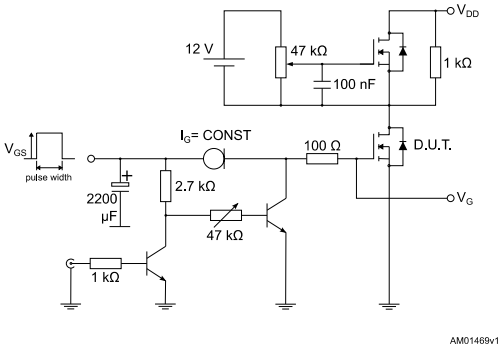

Figure 15: Test circuit for inductive load switching and diode recovery times

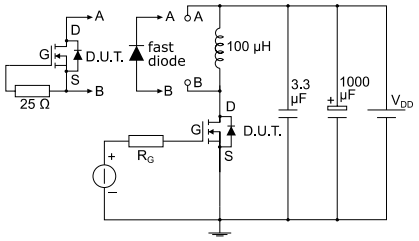

Figure 16: Unclamped inductive load test circuit

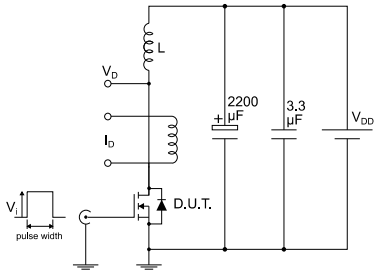

Figure 17: Unclamped inductive waveform

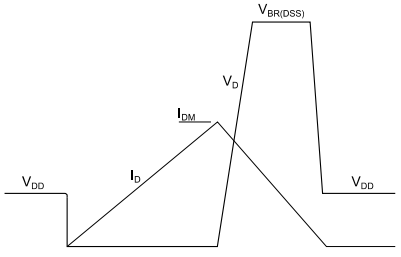

Figure 18: Switching time waveform

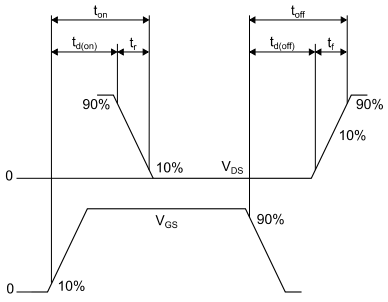

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: ***www.st.com***. ECOPACK® is an ST trademark.

4.1 PowerFLAT™ 5x6 WF type C package information

Figure 19: PowerFLAT™ 5x6 WF type C package outline

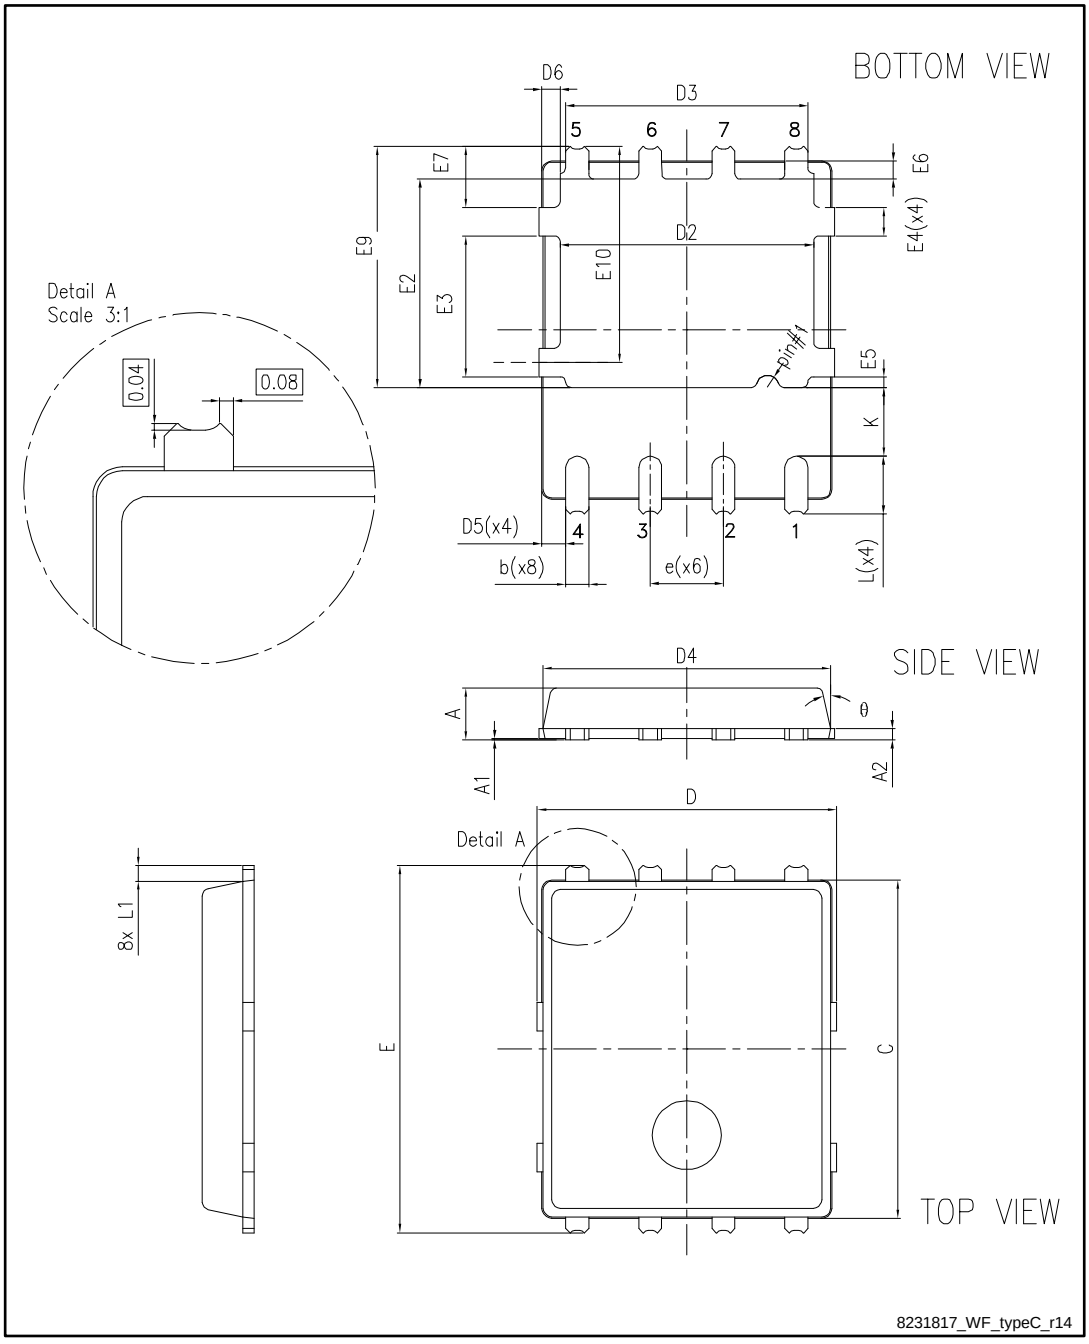

Table 8: PowerFLAT™ 5x6 WF type C mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	0.80		1.00
A1	0.02		0.05
A2		0.25	
b	0.30		0.50
C	5.80	6.00	6.10
D	5.00	5.20	5.40
D2	4.15		4.45
D3	4.05	4.20	4.35
D4	4.80	5.00	5.10
D5	0.25	0.40	0.55
D6	0.15	0.30	0.45
e		1.27	
E	6.20	6.40	6.60
E2	3.50		3.70
E3	2.35		2.55
E4	0.40		0.60
E5	0.08		0.28
E6	0.20	0.325	0.45
E7	0.85	1.00	1.15
E9	4.00	4.20	4.40
E10	3.55	3.70	3.85
K	1.05		1.35
L	0.90	1.00	1.10
L1	0.175	0.275	0.375
θ	0°		12°

Figure 20: PowerFLAT™ 5x6 recommended footprint (dimensions are in mm)

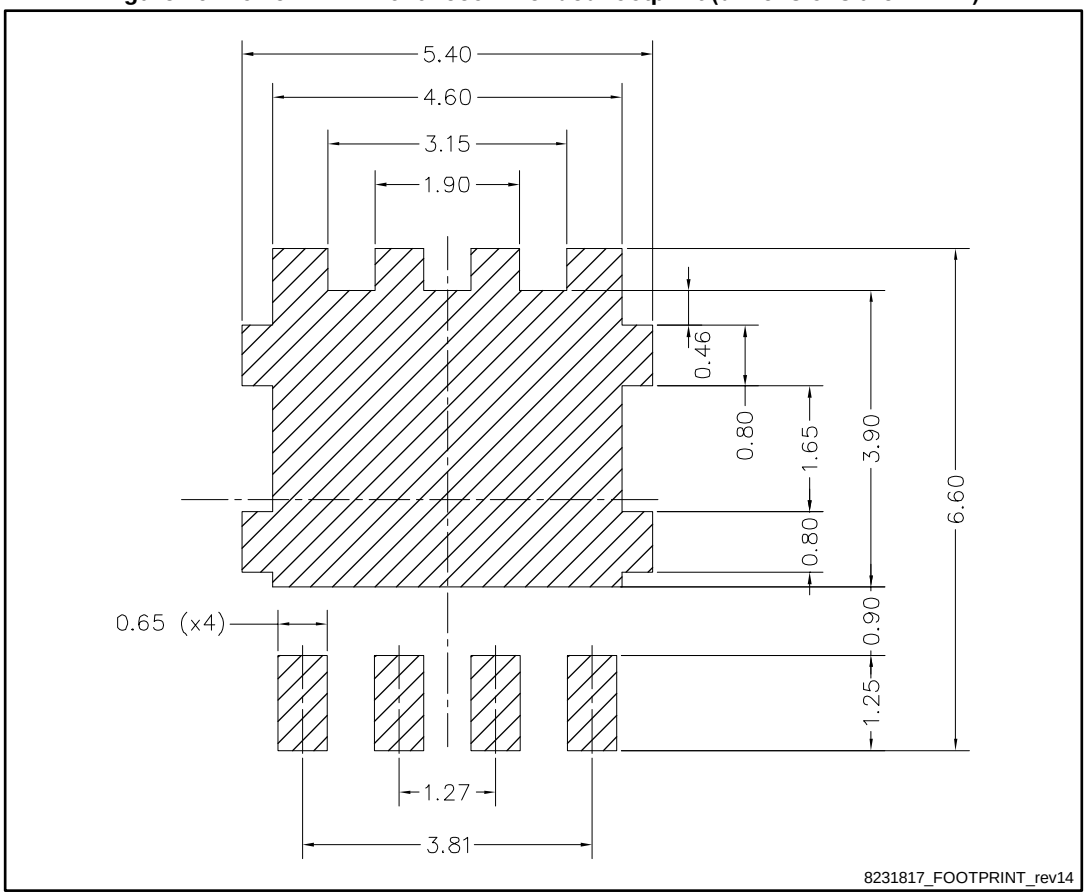

4.2 PowerFLAT™ 5x6 packing information

Figure 21: PowerFLAT™ 5x6 WF tape (dimensions are in mm)

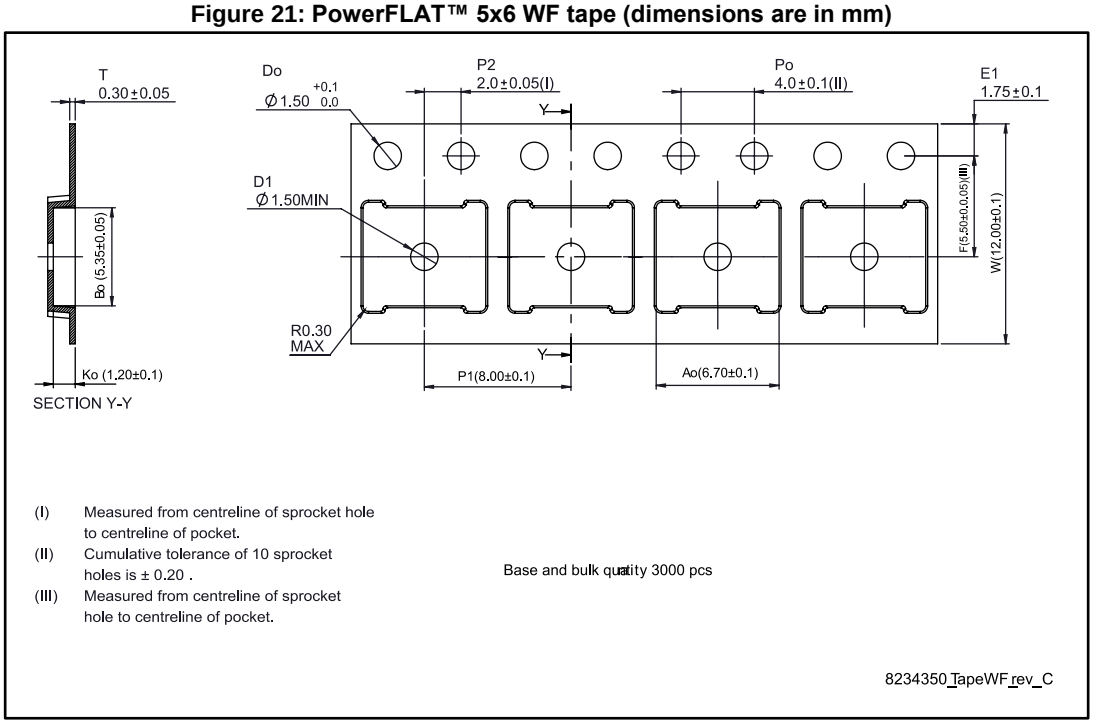

Figure 22: PowerFLAT™ 5x6 package orientation in carrier tape

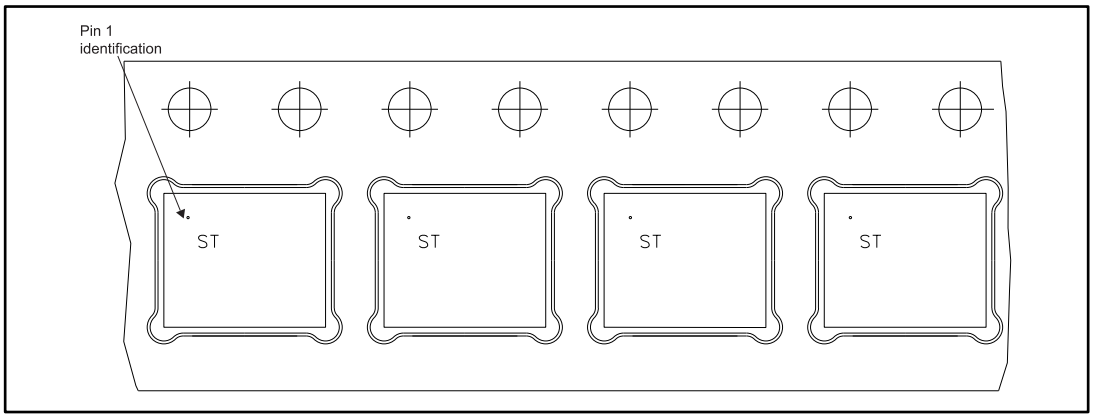

Figure 23: PowerFLAT™ 5x6 reel (dimensions are in mm)

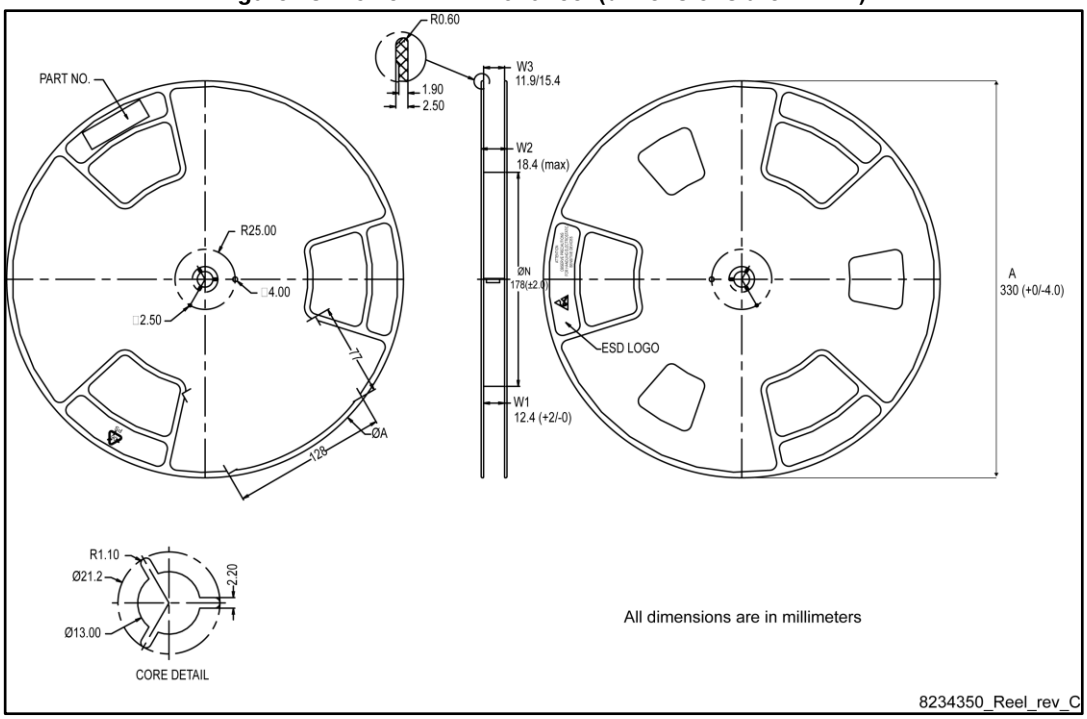

5 Revision history

Table 9: Document revision history

Date	Revision	Changes
07-Oct-2016	1	First release.
15-Dec-2016	2	Datasheet status promoted from preliminary to production data. Updated features list on cover page. Updated *Section 2: "Electrical characteristics"*.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved