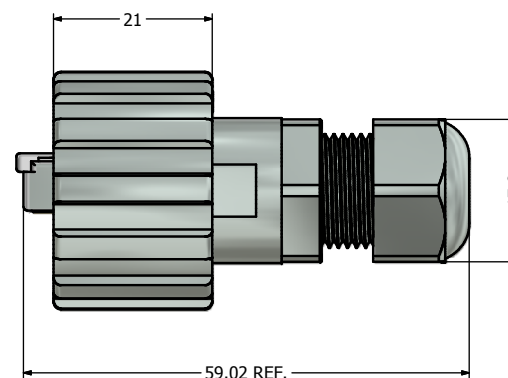
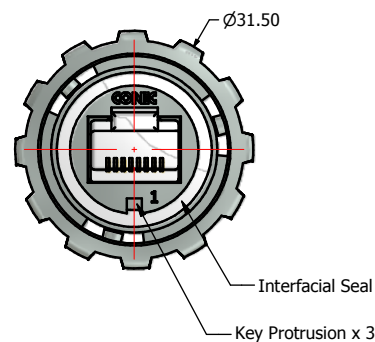
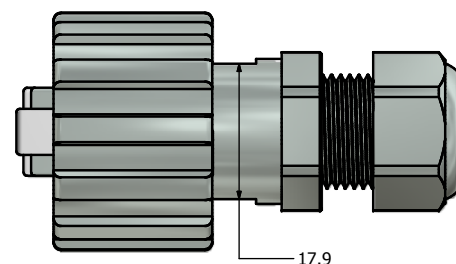
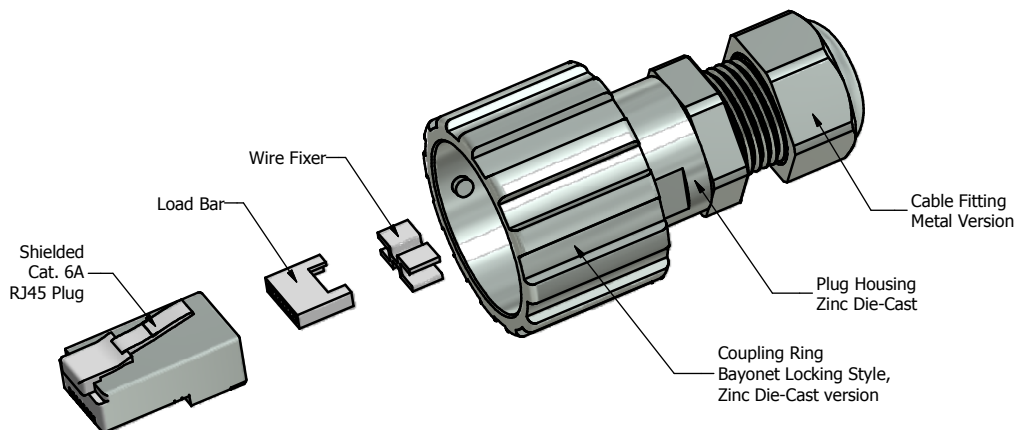


Notes:

1. Electrical Specifications:

- Meets EIA/TIA-568-B.2-10 Cat.6A Channel Specification
- Contact Resistance: 20mOhm max.
- Insulation Resistance: 500MOhm min. @ 100 VDC
- Current Rating: 1.2A max. at 25° C
- Working Voltage: 100 VDC
- DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
- Operating Temperature: -40° C to +85° C

2. Material and Finish:

- Coupling Ring and Plug Housing: Zinc Die-Cast, Nickel Plated
- Interfacial Seal: Silicon, Color: White
- Cable Fitting: Brass, Nickel Plated
- Cable Fitting Rubber Ring: NBR, Color: Black
- Cat.6A RJ45 Plug Metal Shell: Copper Alloy, Nickel Plated
- Cat.6A RJ45 Plug Plastic Housing: Clear Polycarbonate UL94 V-2
- Cat.6A RJ45 Plug Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel

3. Cat.6A RJ45 Plug accepts both Stranded and Solid Cables with Outer Diameter of 4.83mm to 6.73mm

4. Metal Cable Gland accepts Cable Outer Diameter Range of 4.5mm to 8mm

5. IP67 rated when fully mated with the appropriate mating connector

6. RoHS compliant

Directive 2002/95/EC RoHS Compliant

Customer:			Tolerance Unless otherwise specified 0 PLC ±0.50 1 PLC ±0.38 2 PLC ±0.25 3 PLC ±0.10 ANGLES ±3°		Autodesk Inventor	Scale: NTS	Dim. in mm
						Material: See Notes	
Name	Title	Approval Date	2011	Date	Name	Title: RJ45 Plug Kit with shielded Cat. 6A RJ45 Plug Nickel Plated Zinc Die-Cast Version	
			Draw.	Jul. 06	Vincent Ke		
			Appd.	Jul. 06	J. Chaudry		
			Norm			Drawing No.: 17K1A271	DIN A3
			D-old			Part No.: 17-150284	Sheet 1/1
a	original		CONEC®				
Rev.	Changes	Date					