



ULTRAVOLT® US SERIES
MICRO-SIZED HIGH VOLTAGE POWER SUPPLIES





Single-output micro-sized HV modules

Measuring only 5.75 cc (0.35 in³), the highly compact, micro-sized US series is specially designed to meet the needs of design engineers working with commercial, military, industrial, and medical applications. These modules allow access to voltages up to 500 V for customers with size-critical requirements.

Features

- › Micro-sized: 5.75 cc
- › Lightweight: 13 g
- › PCB flat mounting: 11 mm height
- › 4 models from 0 to 200 V to 500 V
- › 100 mW output power
- › Low ripple < 0.01% peak to peak
- › Tight line/load regulation < ±0.01%
- › Low temperature coefficient < ±50 ppm per °C
- › Programmable HV output ±0.5% F.S.
- › Output arc and short circuit protection
- › 5, 9 or 12 VDC Input
- › Precision 2.5 V reference
- › TTL enable/disable/inhibit
- › Output voltage monitor
- › Metal case for low radiated noise
- › Optional flying lead for HV output

Typical Applications


- › Small, lightweight, portable devices
- › Fiber-optic telecom detectors
- › Particle physics detectors
- › Laser range finder detectors
- › Thin-film bias
- › Avalanche photo diodes (APD)
- › Silicon photomultipliers (SiPM)
- › Multi-pixel photon counter (MPPC)
- › Ionization detectors
- › Ultrasonic transducers
- › Small PZT drivers
- › ATE leakage testing
- › Bias supplies






PARAMETER	SPECIFICATIONS				UNITS
Input Voltage Vin	5 VDC ±0.5 or 12 to 15 ±0.5				VDC
Input Current	Inhibition mode: < 5 at full output voltage, full load:				mA
	< 65 (200 Vout)	< 60 (300 Vout)	< 55 (400 Vout)	< 50 (500 Vout)	mA
Polarity	Fixed positive or negative				
Output Voltage	0 to 200	0 to 300	0 to 400	0 to 500	VDC
Output Current	500	330	250	200	μA
HV Setting	Via external potentiometer, minimum resistance 10 kΩ or via external voltage source 0/2.5V ±0.5% at full scale, and input impedance > 1 MΩ				-
Load Voltage Regulation	±0.01% of full output voltage for no load to full load				-
Line Voltage Regulation	±0.01% of full output voltage over specified input voltage range				-
Residual Ripple	< 0.01% pk to pk at full output voltage and current				-
Temperature Coefficient	< 50				PPM/°C
Output HV Monitoring	0/2.5 V signal				-
	Accuracy: ±0.2% F.S.				
	Output impedance: 1 kΩ				
Output Reference Voltage	2.5 V ±0.5%, TC: 50 ppm/°C, max output current: 1 mA				-
HV Power ON/OFF	ON: 0 V, connected to ground				-
	OFF: not connected				
	Open collector compatible				
Operating Temperature	-10 to +65, full load, max Eout, case temp.				°C
Storage Temperature	-40 to +70				°C
Safeguards	Output current internally limited				-
	Soft start feature: the start is guaranteed with no overshoot				


STANDARD

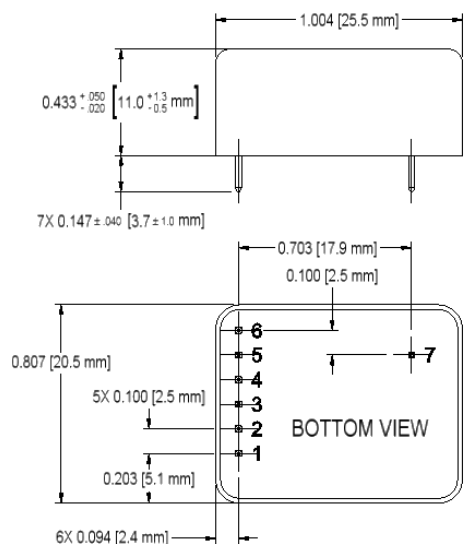


WITH -WS OPTION

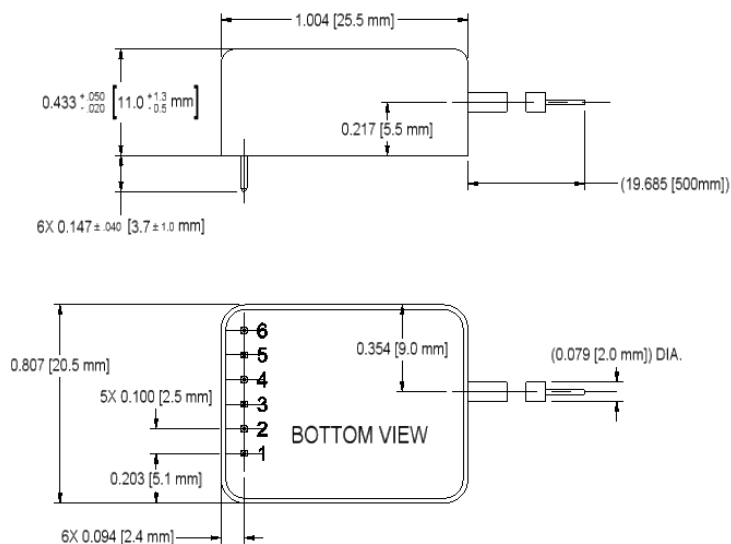

PCB MOUNTING (TOP VIEW)

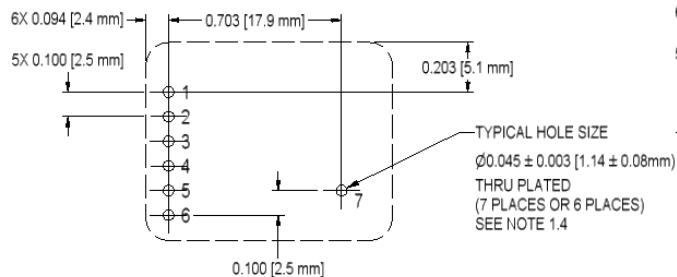

PCB MOUNTING (TOP VIEW)

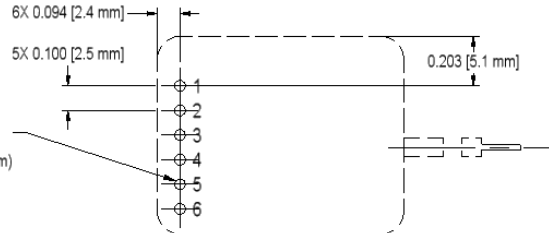

Note: Drawing views: third angle projections.

PHYSICAL SPECIFICATIONS

Construction

Steel, tin-plated, thickness 0.5 mm (0.02")

Insulation: fully potted in RTV

Volume

5.750 cc (0.351 in³)

Weight

13 g (0.459 oz)

Pin Length

> 2 mm (0.078"), spacing 2.54 mm (0.1")

Optional Lead

Coaxial cable (RG178), diameter 2 mm (0.079"), length 500 mm (19.685")

CONNECTIONS	
Pin	Function
1	POSITIVE POWER INPUT
2	POWER GROUND
3	REMOTE ADJUST INPUT
4	+2.5 VDC REFERENCE OUTPUT
5	ENABLE/DISABLE
6	EOUT MONITOR
7	HV OUTPUT

Mounting tabs must be connected to ground.

ORDERING INFORMATION		
Type	0 to 200 VDC Output	0.2US
	0 to 300 VDC Output	0.3US
	0 to 400 VDC Output	0.4US
	0 to 500 VDC Output	0.5US
Input	5 VDC Nominal	5
	12 VDC Nominal	12
Power	W Output	0.1
Case	Steel, Tin-plated Case	(Standard)
Polarity	Positive Output	-P
	Negative Output	-N
Option	Output Voltage Lead Wire	-WS

Popular accessories ordered with this product include the PCB-CONN-US.

