

D

C

B





A

D

C

B

A

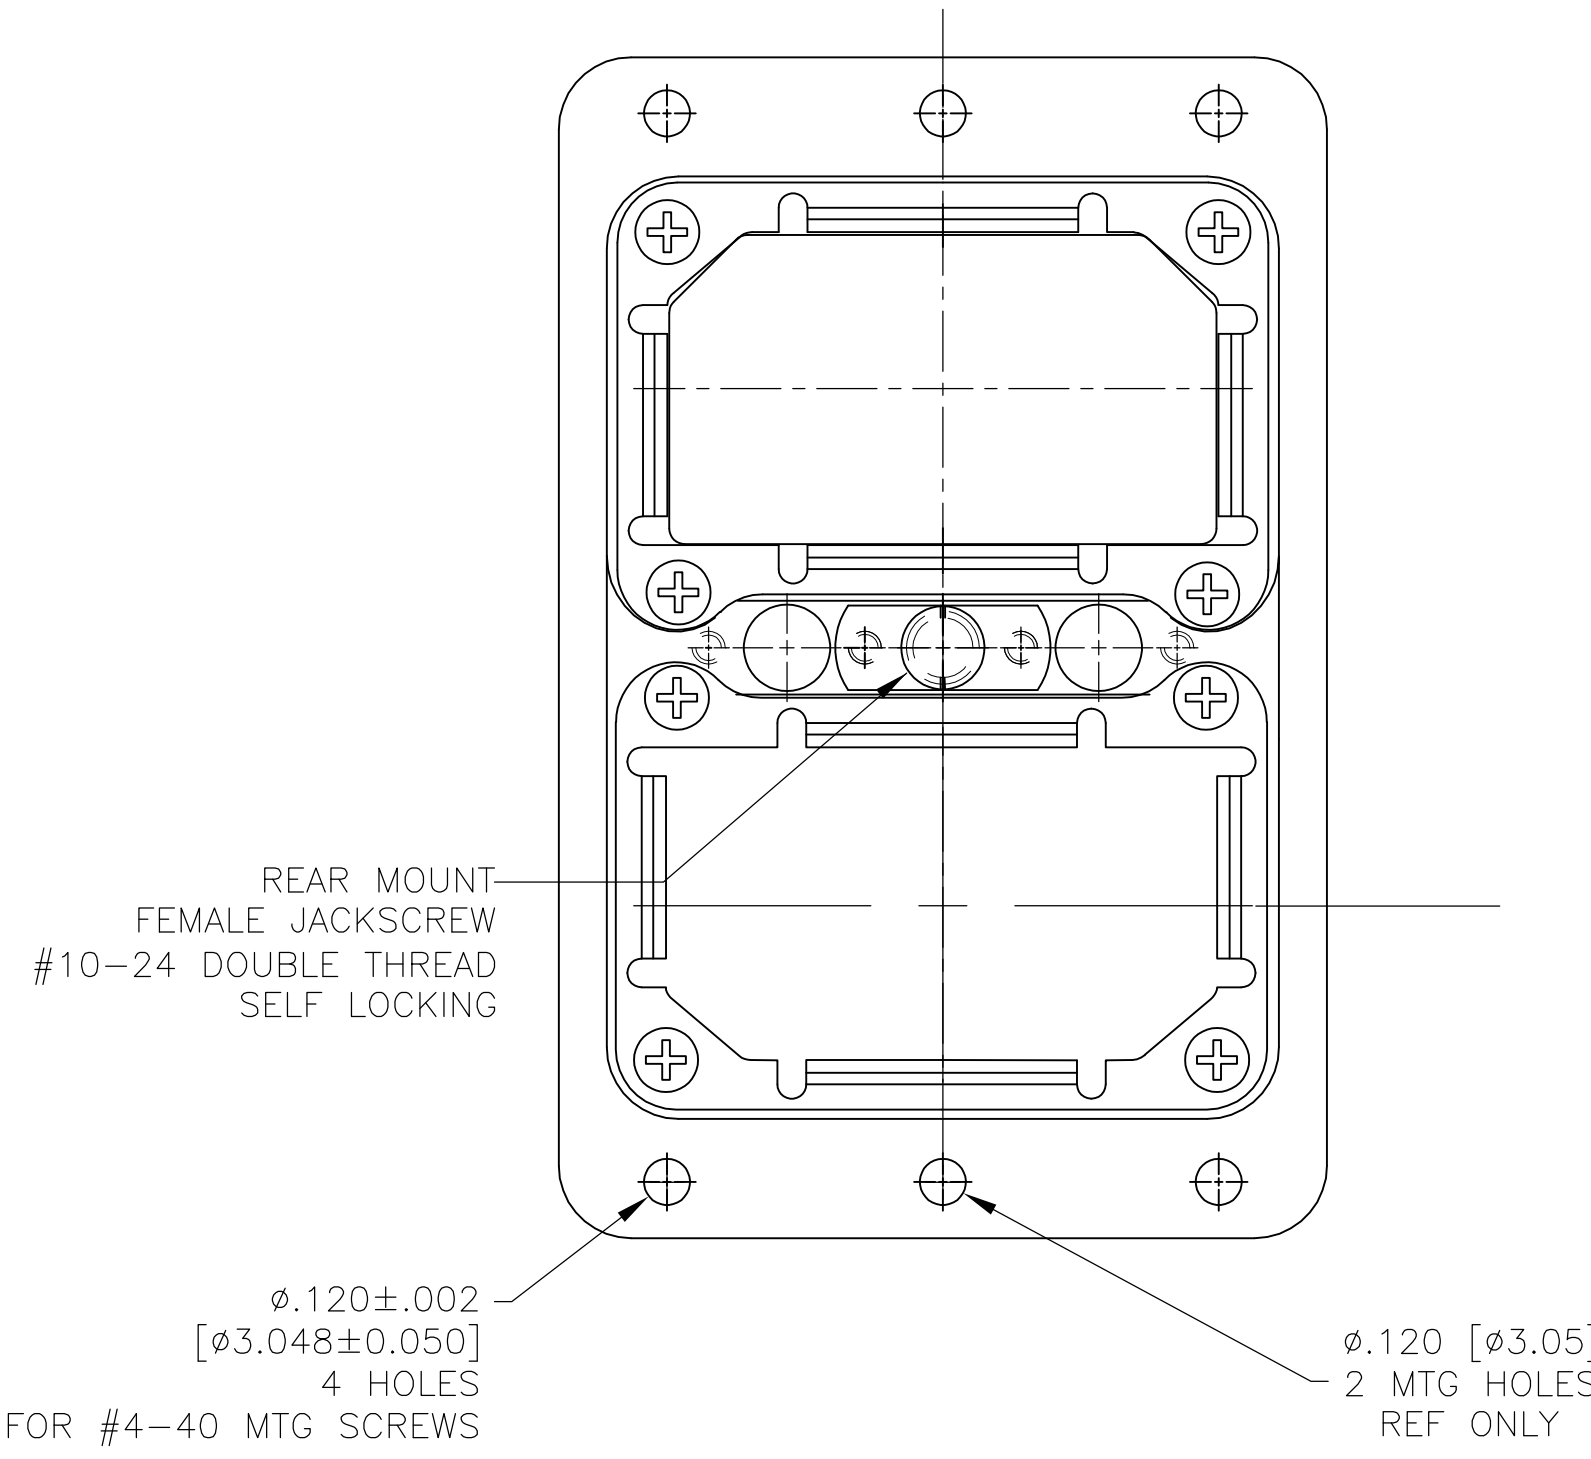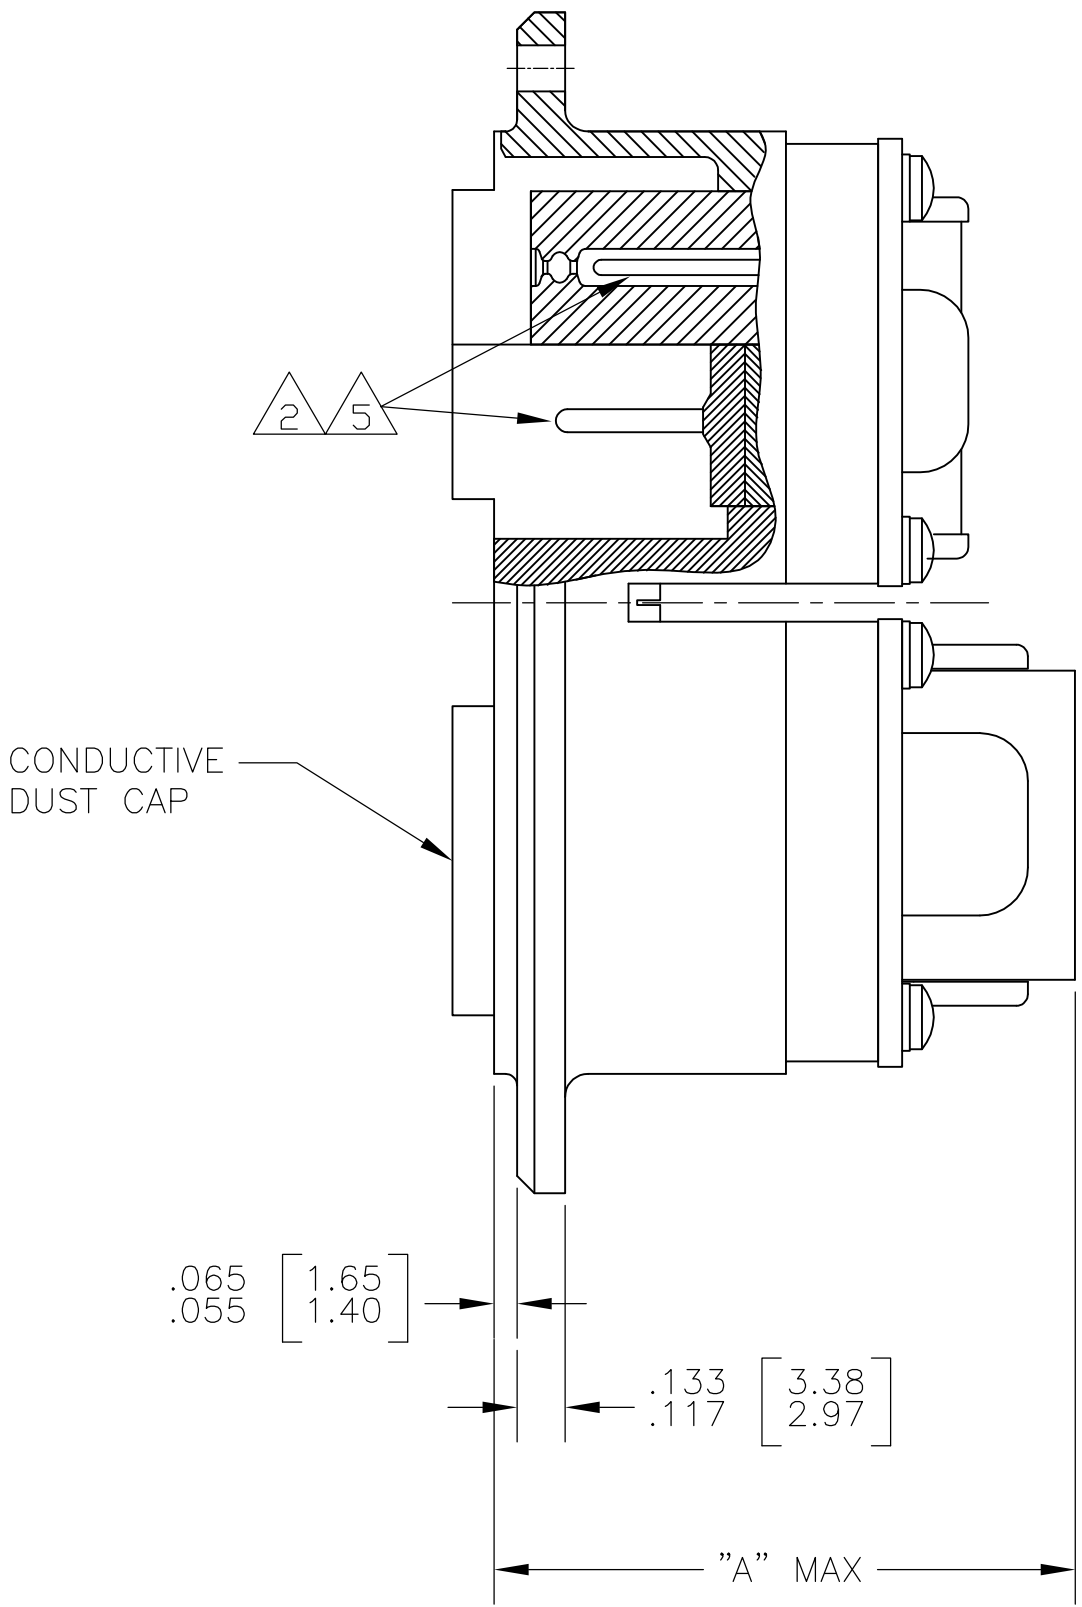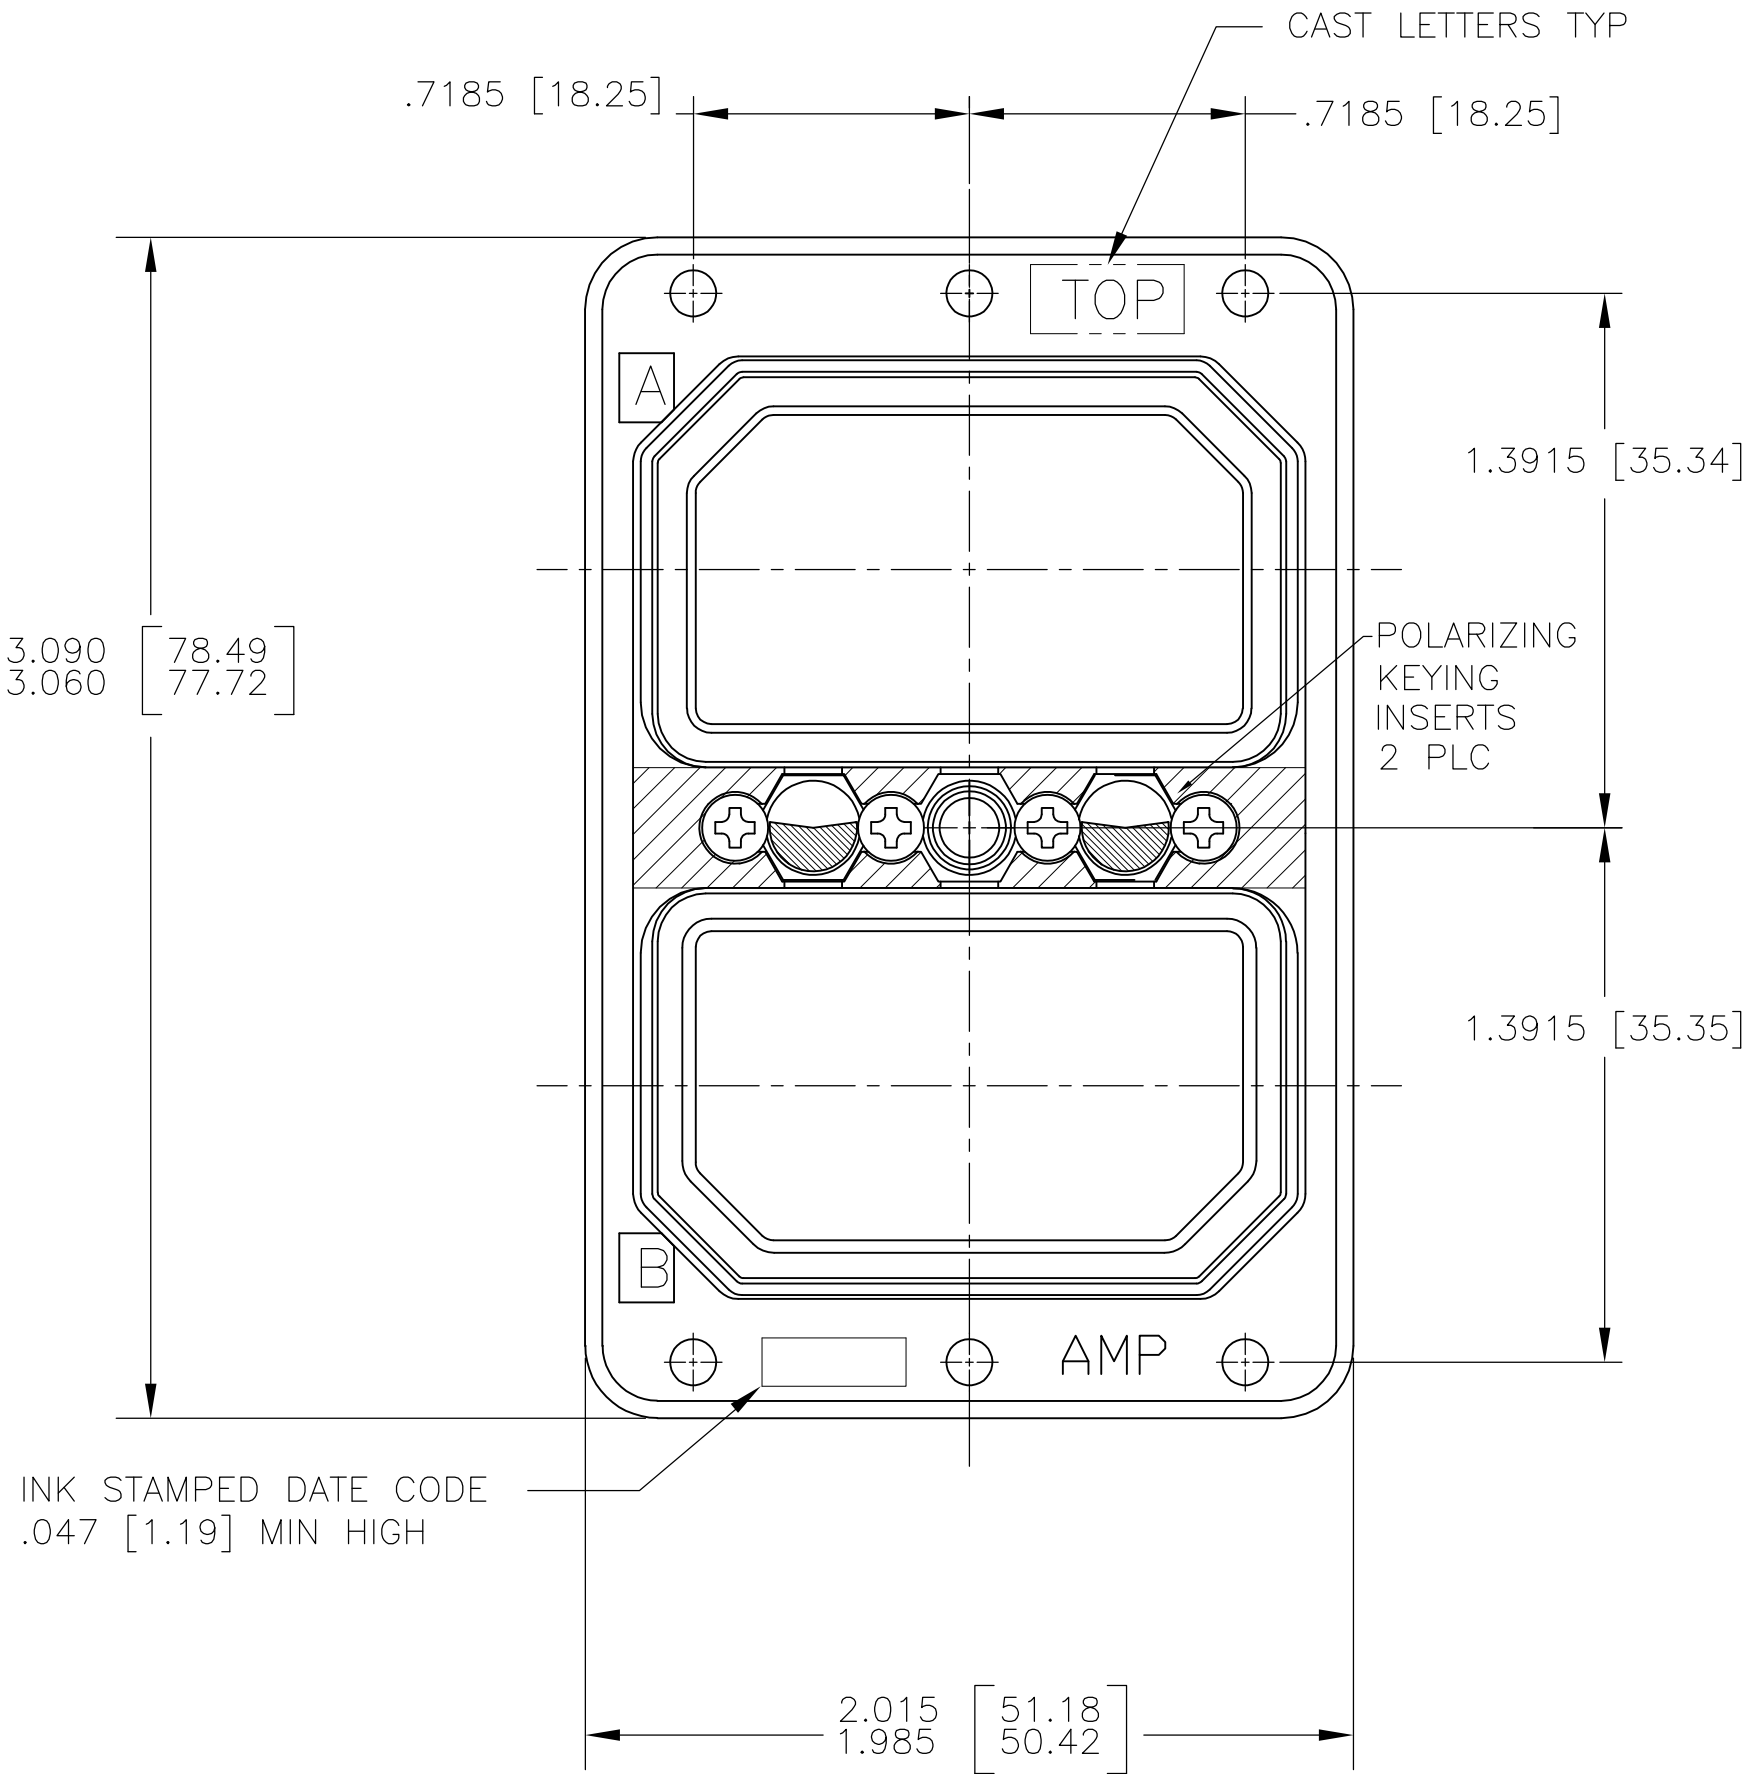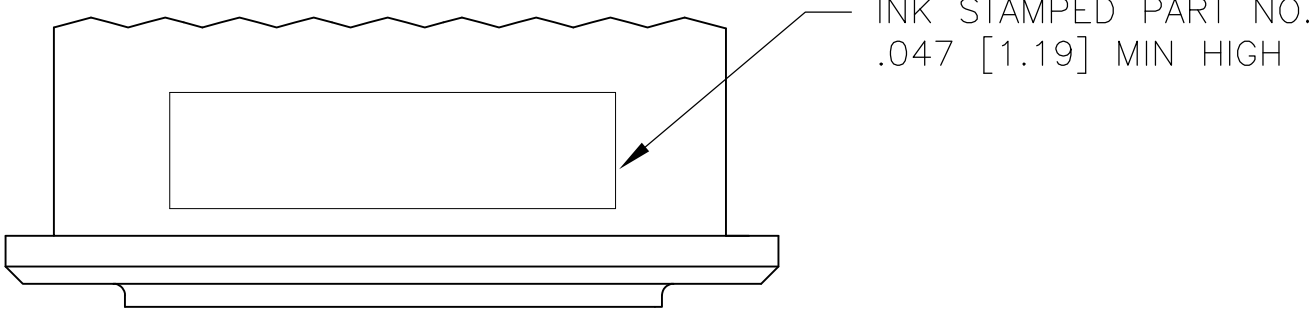

- MATERIAL AND FINISH
SHELL: DIE CAST ALUM. ALLOY PER FED SPEC QQ-A-591
FINISH: TYPE II CADMIUM PLATE (YELLOW) PER QQ-P-416
INSULATOR HARD: EPOXY PER MIL-M-24325; SOFT: SILICONE RUBBER
GROMMET PROTECTORS: ALUM. ALLOY, FINISH: BLUE EPOXY
POLARIZING KEYING INSERTS & SCREWS: STAINLESS STEEL
FEMALE JACKSCREW: STAINLESS STEEL
SCREWS & WASHERS: STEEL. FINISH: CAD. PLATED PER QQ-P-416
DUST CAPS: CONDUCTIVE BLACK THERMOPLASTIC
- CONTACTS SHOWN IN POSITION FOR ILLUSTRATION ONLY, ARE INCLUDED IN A CONTAINER WITHIN CONNECTOR PACKAGE FOR SHIPMENT, EXCEPT P/N'S 1-207595-2 THRU 2-207595-1
- CONNECTOR MEETS AMP PRODUCT SPEC 108-10, 019
- COAX CONTACTS & SEALING BOOTS MUST BE ORDERED SEPARATELY

	INSERT ARRANGEMENT			
	26	32C2	67	106
"A" MAX	1.525 [38.74]	1.700 [43.18]	1.525 [38.74]	1.279 [32.49]

	PART NO.	ARRANGEMENT		PART NO.  LESS CONTACTS
		MODULE A	MODULE B	
	207595-1	106P	67S	1-207595-2
OBSOLETE	207595-2	106P	26S	1-207595-3
OBSOLETE	207595-3	106P	106P	1-207595-4
OBSOLETE	207595-4	106P	106S	1-207595-5
	207595-5	106S	106S	1-207595-6
	207595-6	106S	26P	1-207595-7
	207595-7	106S	67P	1-207595-8
OBSOLETE	207595-8	67S	67S	1-207595-9
	207595-9	106S	32C2P	2-207595-0
	1-207595-0	106P	32C2S	2-207595-1
	1-207595-1	NO INSERT	NO INSERT	-

- ALL METRIC DIMENSIONS ARE SHOWN IN PARENTHESIS
- FOR MATING CONNECTOR SEE 207596
- CONNECTORS ORDERED LESS CONTACTS WILL BE MARKED WITH SAME P/N AS CONNECTORS ORDERED WITH CONTACTS

THIS DRAWING IS A CONTROLLED DOCUMENT.

0 PLG ± -
1 PLG ± -
2 PLG ± -
3 PLG ± .010
4 PLG ± .0050
ANGLES ± -

6

00779

207595

TE Connectivity

RECEPTACLE CONNECTOR INSTALLATION
(WITH CENTER FEMALE JACKSCREW)

SCALE 2:1

SHEET 1 OF 1

REV T

DWN
C.C.THOMAS
3-25-02

CHK
J.MARKEY
3-25-02

APVD
J.MARKEY
PRODUCT SPEC

APPLICATION SPEC

SIZE
A1

CAGE CODE

DRAWING NO
207595

RESTRICTED TO

CUSTOMER DRAWING