
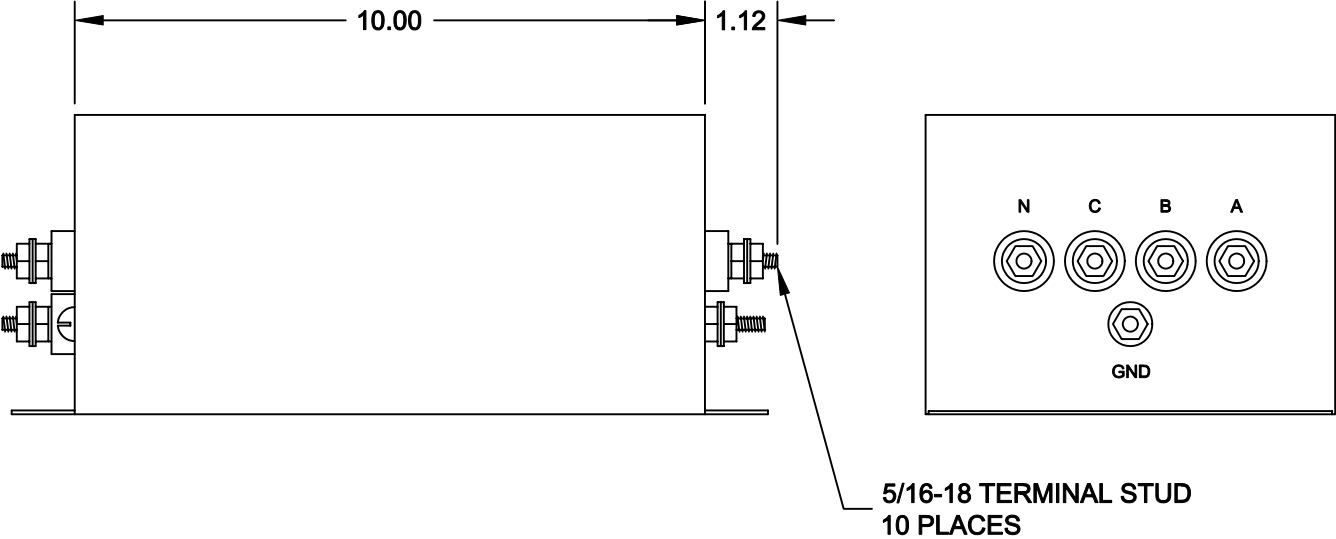
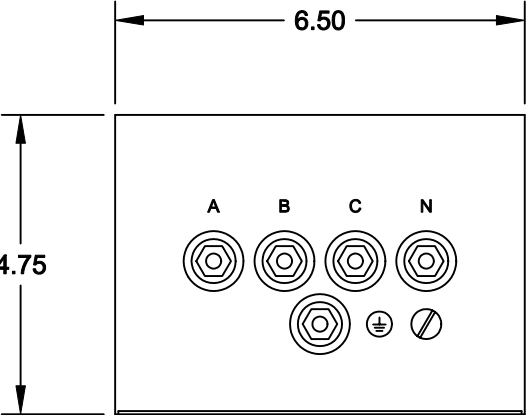


SPECIFICATIONS


1. CASE:
18 GA. (.048) CRS, TIN PLATED
2. RATED CURRENT:
3 x 80A
3. RATED VOLTAGE:
250/440VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO NEUTRAL: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
1.6mA @ 250VAC, 50Hz

REVISION

LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07-03-02	LE
B	REVISED MARKING	03-13-03	LE

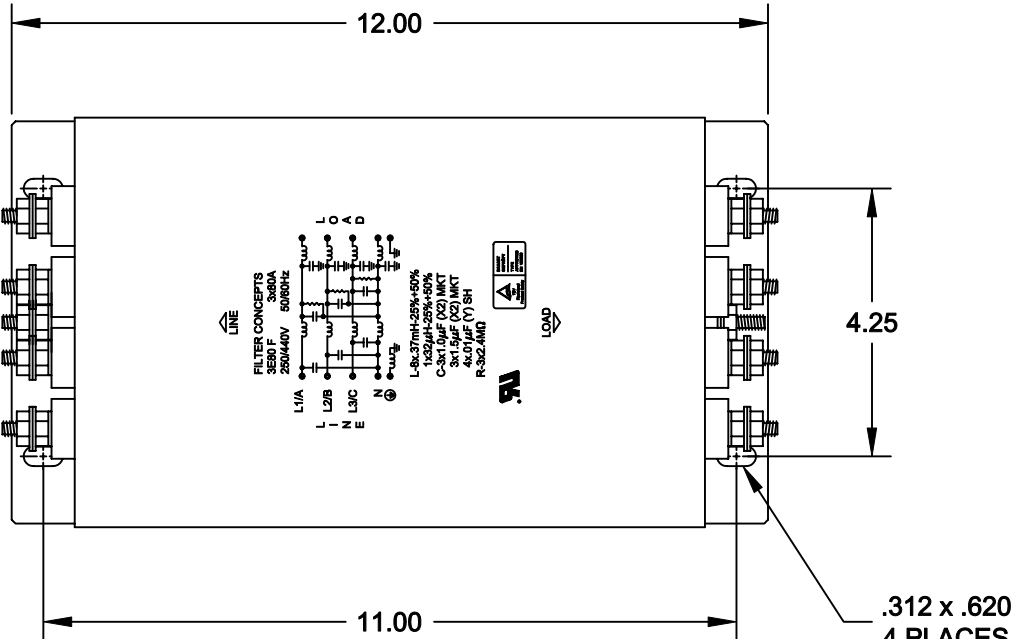

SCHEMATIC

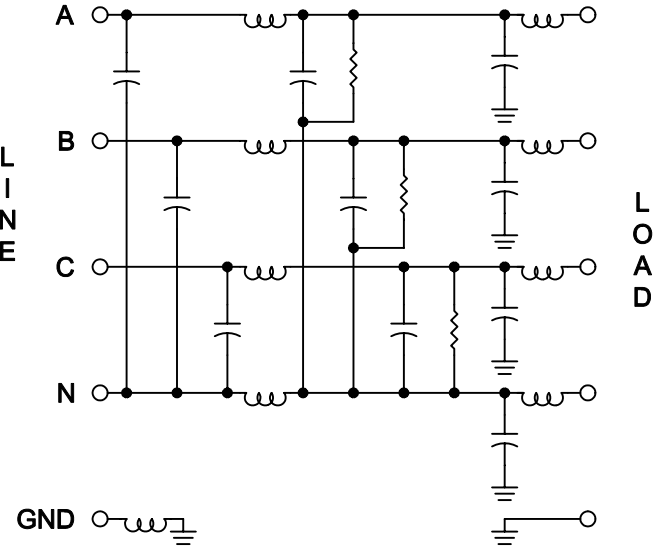

INSERTION LOSS (50 Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/N	20 db	30 db	55 db	50 db	35 db	50 db
L/G	1 db	30 db	60 db	60 db	60 db	50 db

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
.XXX ±.010

CONTRACT NO.

APPROVALS

DATE

DRAWN

GIANG TRINH

07-03-02

CHECKED

DANNIEL VUONG

07-03-02

MATERIAL

FINISH

NEXT ASSY

USED ON

APPLICATION

FILTER CONCEPTS INC.

APPLICATION DRAWING
3E80 F FILTER

SIZE

B

CODE IDENT NO.

DRAWING NO.

7390

SCALE

1/3

SHEET

1

OF

1