

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AL	2		Y	New drawing released	12NOV2008	J.S	P.E.G
			Y1	REVISED PER ECO-09-026495	17DEC2009	KK	AEG
			Y2	ECR-10-026537	15JUN2011	KK	HMR

1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Terminal Conductor: FLK-Cable
Conductor: F-Crimp
Insulation: F-Crimp








Cross-section in mm ²										
	Single connection	0.50	0.75	1.00	1.50	2.00	2.50	3.00	4.00	6.00
0.50	X	X	X	X	X					
0.75	X	X	X	X						
1.00	X	X	X	X						
1.50	X	X								
2.00										
2.50										
3.00										
4.00										
6.00										

STE TE Connectivity

NAME				.140 DIA PIN	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
A3	-	©925660	-		

DWN	J. Salo	12NOV2008
CHK	R. Sole	12NOV2008
APVD	P.F.Grassano	12NOV2008
PRODUCT SPEC	108-1032	
APPLICATION SPEC	114-1007	
WEIGHT	-	

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV Y2

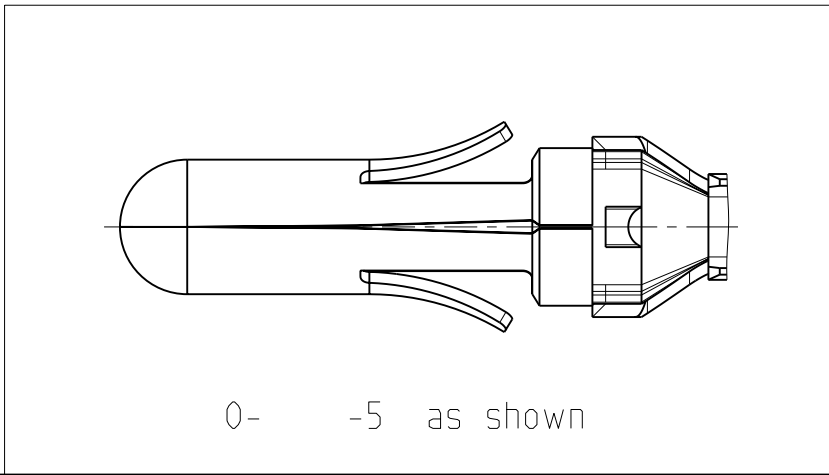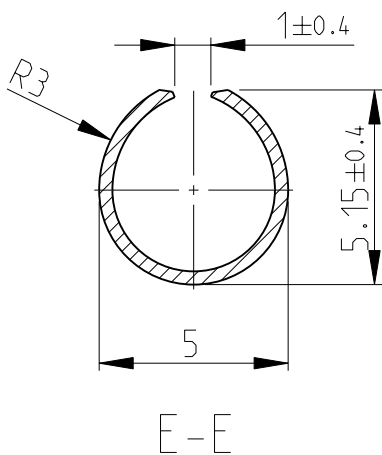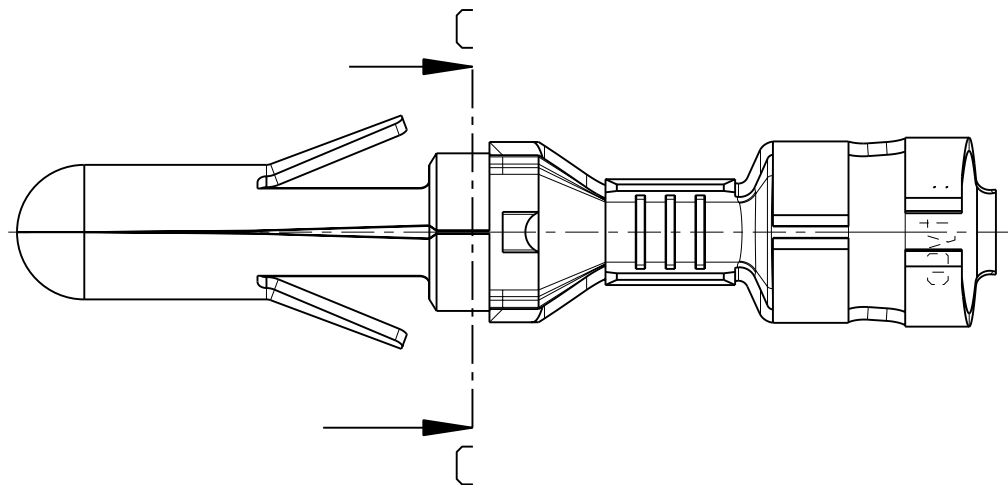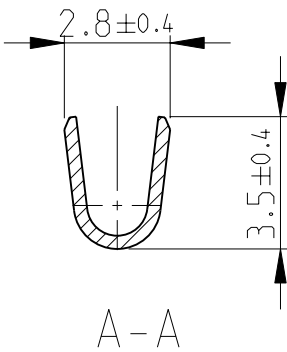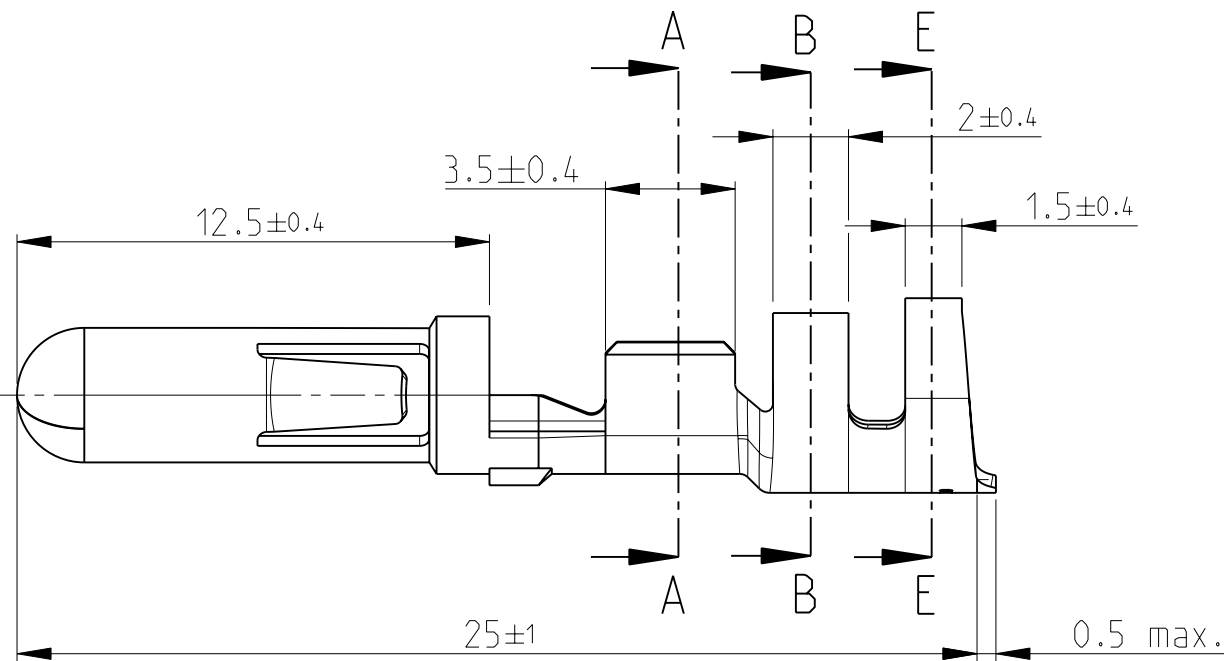

0- -1,2,3,4,6,7 as shown
Wire size: 0.5-2.0 mm²

1	OBSOLETE	Bright	Brass	925660-7
		Gold over Ni	Phosphor Bronze	925660-6
	OBSOLETE	Pre-tin plated	Steel	925660-5
		Bright	Phosphor Bronze	925660-4
		Silver	Phosphor Bronze	925660-3
		Pre-tin plated	Phosphor Bronze	925660-2
		Pre-tin plated	Brass	925660-1
		Finish	Material	Part no.

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ±1° 30'
MATERIAL See table	FINISH See table