


DC Power Jacks

163-4302-E, 163-4303-E

KOBICONN

DC Power Jacks

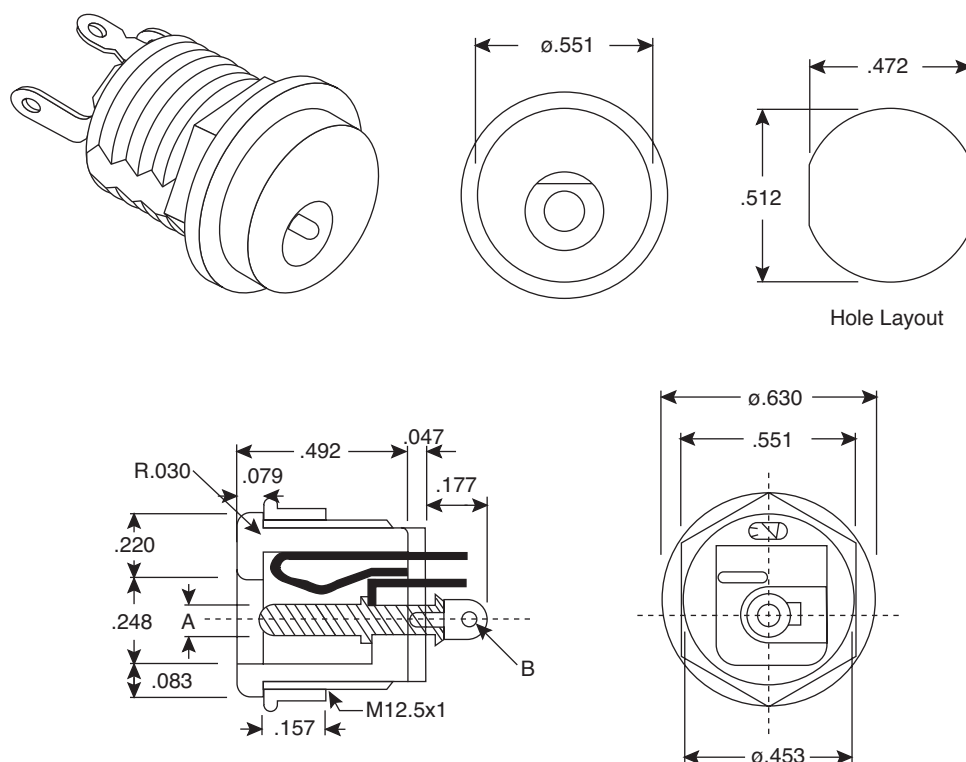

DIMENSIONS: In.

SPECIFICATIONS	
Pin Size (A):	$\phi 2\text{mm}$ (163-4302-E), $\phi 2.35$ (163-4303-E)
Contact Resistance:	30m Ω max.
Insulation Resistance:	100M Ω min. @ 250VDC
Breakdown Voltage:	250VAC for 1 minute
Rated Current:	0.5A @ 12/24V
Body:	ABS
Pin:	Nickel Plated Brass
Contact Spring:	Silver Plated Copper/Zinc/Aluminum Alloy
Terminals:	Silver Plated Brass Wire
Insulator:	Phenol
Nut:	Polymid 12.5mm P=1
B:	163-4302-E = $\phi .22 \times .084$ 163-4303-E = $\phi .22 \times .10$
RoHS Compliant	

Date Last Revised: 4-1-11

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-301339

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

163-4302-E, 163-4303-E