




TOP VIEW

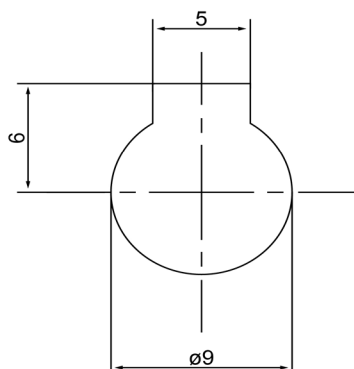


SIDE VIEW

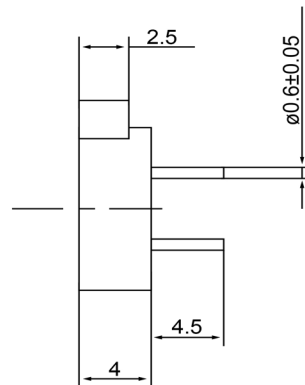

BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	2,731	(Hz)									
Rated Voltage	3	(V)									
SPL @ 10cm	85	(dBA)									
Coil Resistance	15	(ohm)									
Mount Type	Thru-hole										
Voltage Range	2 ~ 4	(V)									
Max Rated Current	90	(mA)									
Housing Material	NORYL										
Operating Temperature	-30 ~ +70	°C									
Storage Temperature	-40 ~ +85	°C									
Weight	1	(g)									
 DB UNLIMITED			Electro-Mechanical Transducer	TE092703-5							
			Drawn by		Date		Checked by		Date		Approved by
A.B.		10/21/2013		C.E.		10/21/2013		J.S		10/21/2013	