

10

9

8

7

6

5

4

3

2

1

F




E

D


C

B

A

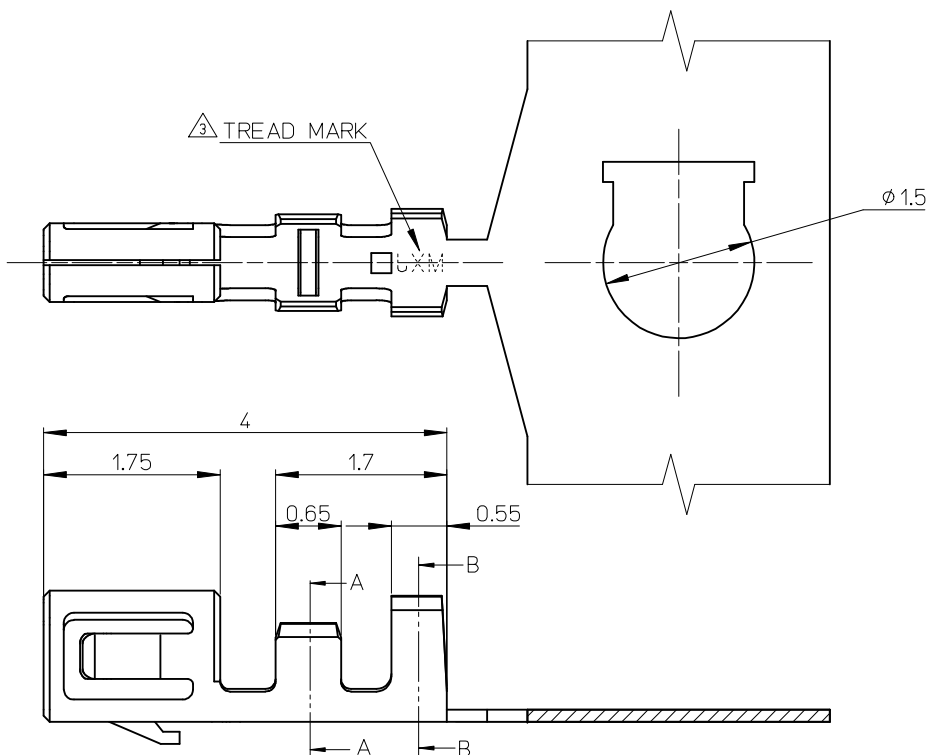

SECT. B-B



SECT. A-A

NOTES.

1. 適合ハウジング: 501330-**** / 501939-****
APPLICABLE HOUSING: 501330-**** / 501939-****

2. メッキ仕様
PLATING
錫メッキ: 1.0μmMIN. リフロー処理 (前メッキ)
Sn: 1.0μmMIN. REFLOW TREATMENT (PRE-PLATED)

3. 刻印は裏面から実施
PUNCH SIDE: OTHER SIDE

MXJ

金型番号 (番号無しの製品もあります。)
Die No. (There is Non-Mark Item)

TREAD MARK

501334-0100	バラ状 LOOSE
501334-0000	連鎖状 CHAIN
MATERIAL NO.	端子形状 FORM

MATERIAL		REVISED EC NO: J2009-0651 DRAWN: RAKATA 2008/09/16 CHKD: HATSUMOTO 2008/09/16 APPR: NUKITA 2008/09/16	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 20:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
リン青銅 PHOSPHOR BRONZE t=0.12				10 UNDER	±0.2	DRAWN BY DATE NYOSHIDA 2004/07/29	TITLE 1.0 WIRE TO BOARD CONN. CRIMP REC TERMINAL (SN) -LEAD FREE-			
FINISH SEE NOTE				10 OVER 30 UNDER	±0.25	CHECKED BY DATE MYAGI 2004/07/29				
WIRE RANGE AWG #28-32				30 OVER	±0.3	APPROVED BY DATE MIYAZAWA 2004/07/29				
INS. RANGE Ø0.4-0.8				ANGULAR ±3 °		MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-501334-001	SHEET NO. 1 OF 1		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

9

8

7

6

5

4

3

2