




- 1. PARTS MUST COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2. WIRE RANGE: 0.8 - 2.0 mm² [18 - 14 AWG].
- 3. INSULATION RANGE: 2.29 - 3.81 [.090 - .150] DIAMETER
- 4. FITS A 1.57 [.062] THICK P.C. BOARD.

OBSOLETE	YES	0.00508 [.000200] BRIGHT TIN	0.198 [.0078] PH BRZ	3-647334-1
	NO	0.00508 [.000200] BRIGHT TIN-LEAD	0.198 [.0078] PH BRZ	647334-1
	LEAD FREE	FINISH	MATERIAL	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				
DRAWN BY: K. WHITAKER		130072004		
CHECKED BY: J. ELLIS		130072004		
APPROVED BY: J. ELLIS		130072004		
APPLICATION SPEC		TE Connectivity		
WEIGHT: 0.000000		TERMINAL, MINI AMP-IN™ 2000		
MATERIAL: SEE TABLE		SIZE: 0.00779 647334		
FINISH: SEE TABLE		CUSTOMER DRAWING		
		SHEET 1 OF 1		

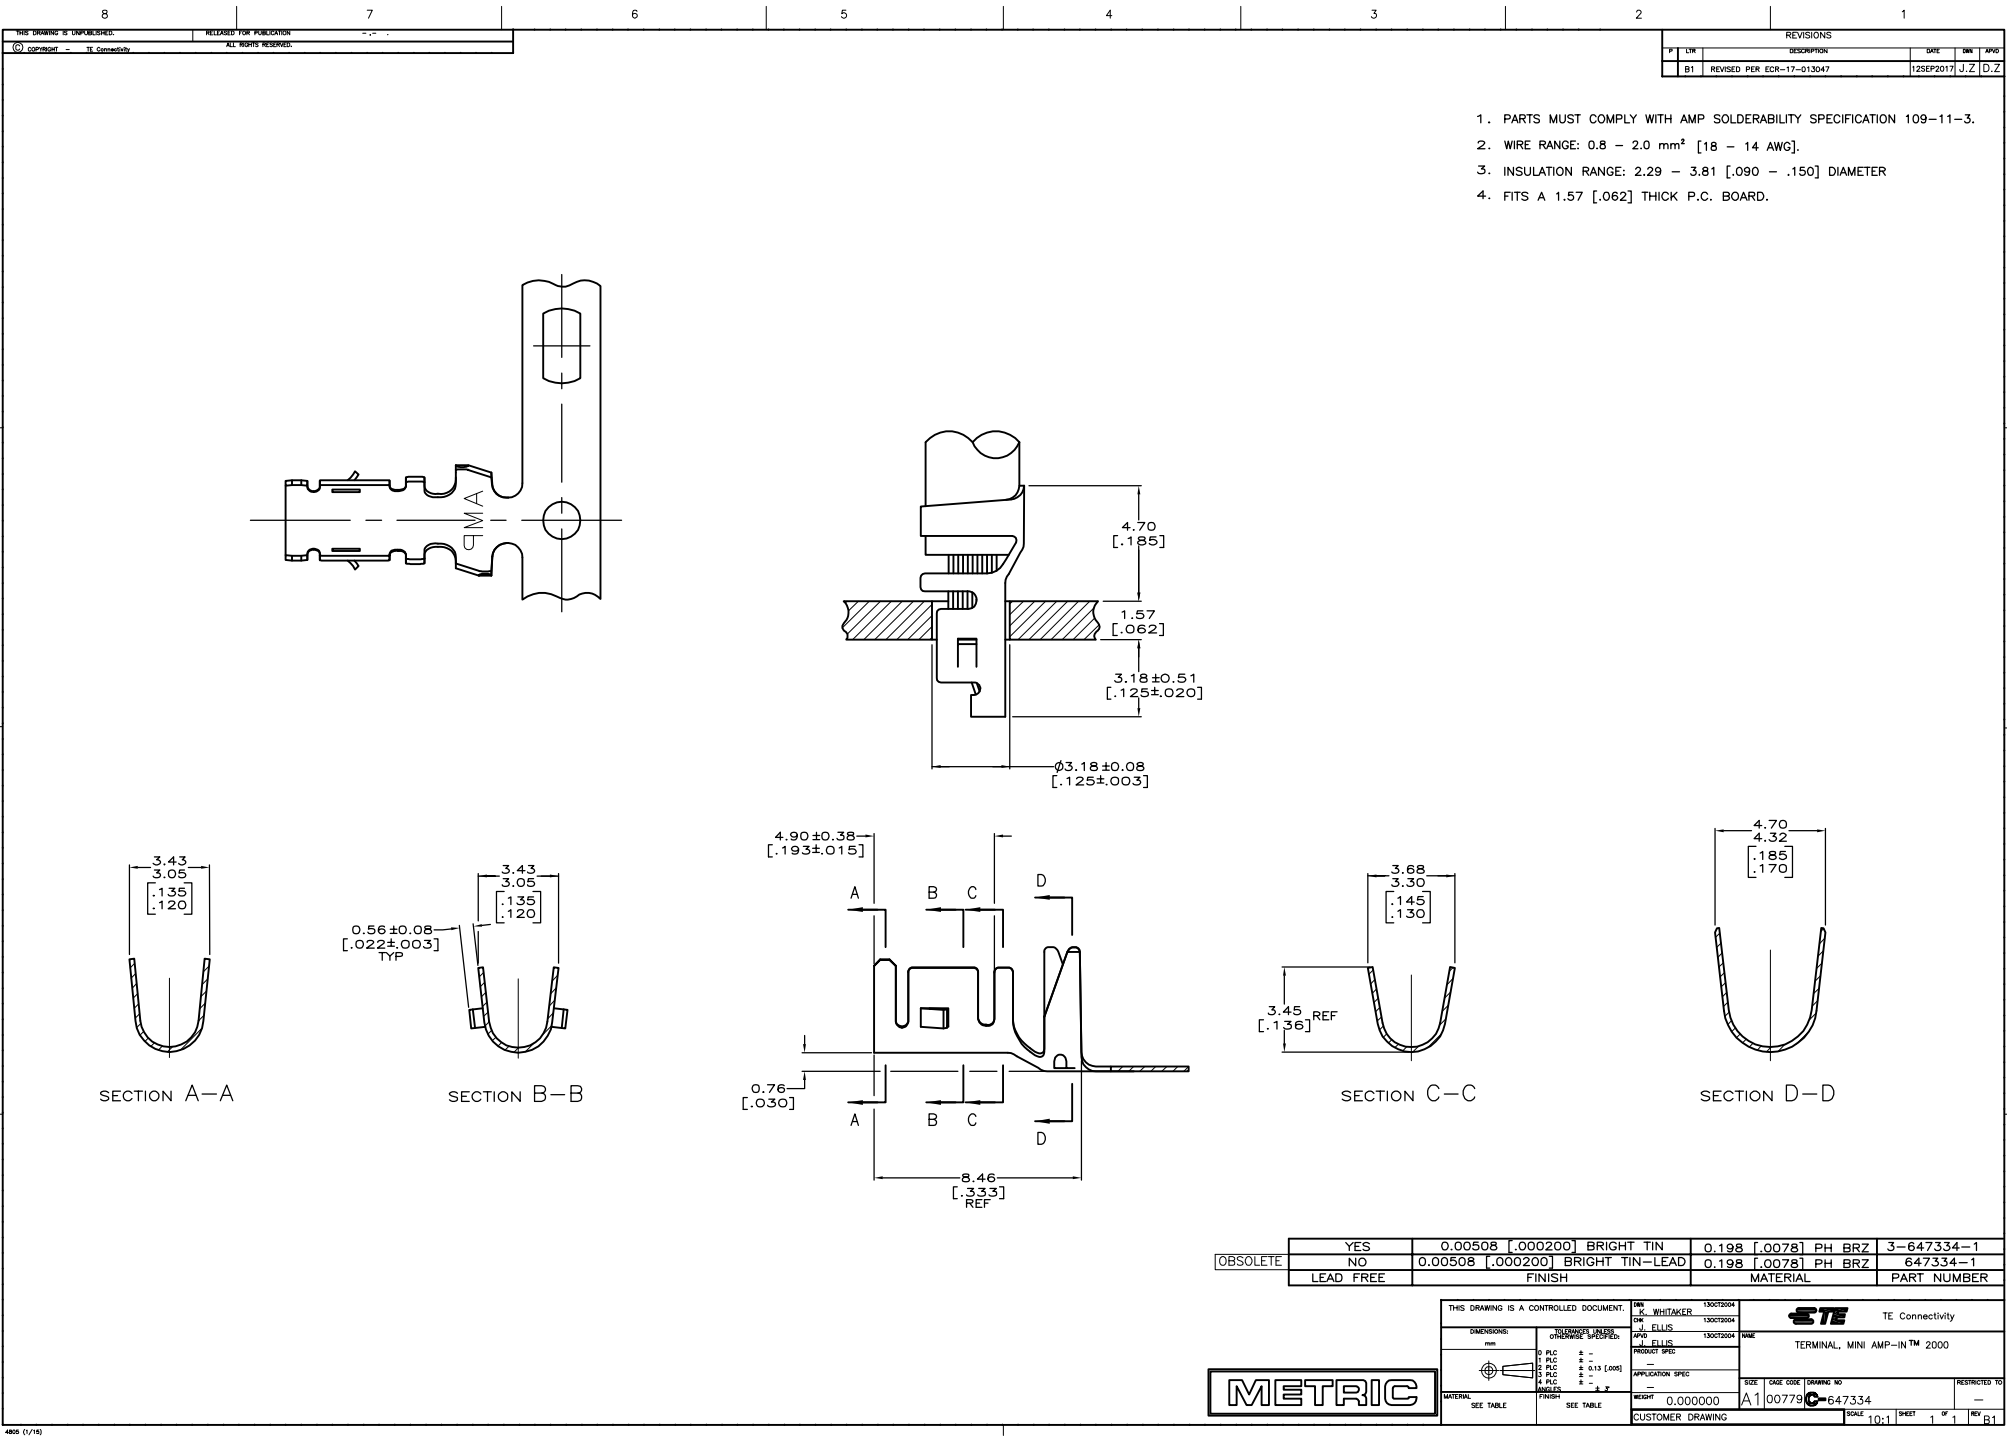