

NOTES:

## I. MATERIALS AND FINISHES:

SMA STR PLUG - STAINLESS STEEL, GOLD PLATING  
CABLE - 0.085 CONFORMABLE

2. ELECTRICAL:



A. IMPEDANCE: 50 OHM

3. PACKAGING:

A. QUANTITY: SINGLE PACK  
B. MARKING: BAG TO BE MARKED  
"AMPHENOL RF, 95-902-449-XXX AND DATE CODE".

THIRD ANGLE PROJ. 

| REVISIONS |                                      |          |       |      |
|-----------|--------------------------------------|----------|-------|------|
| REV       | DESCRIPTION                          | DATE     | ECO   | APPR |
| A         | RELEASE TO MFG                       | 11/16/15 | 50824 | VK   |
| B         | ADDED PNS FOR 3, 4, AND 5 IN LENGTHS | 12/18/15 | 50911 | JN   |

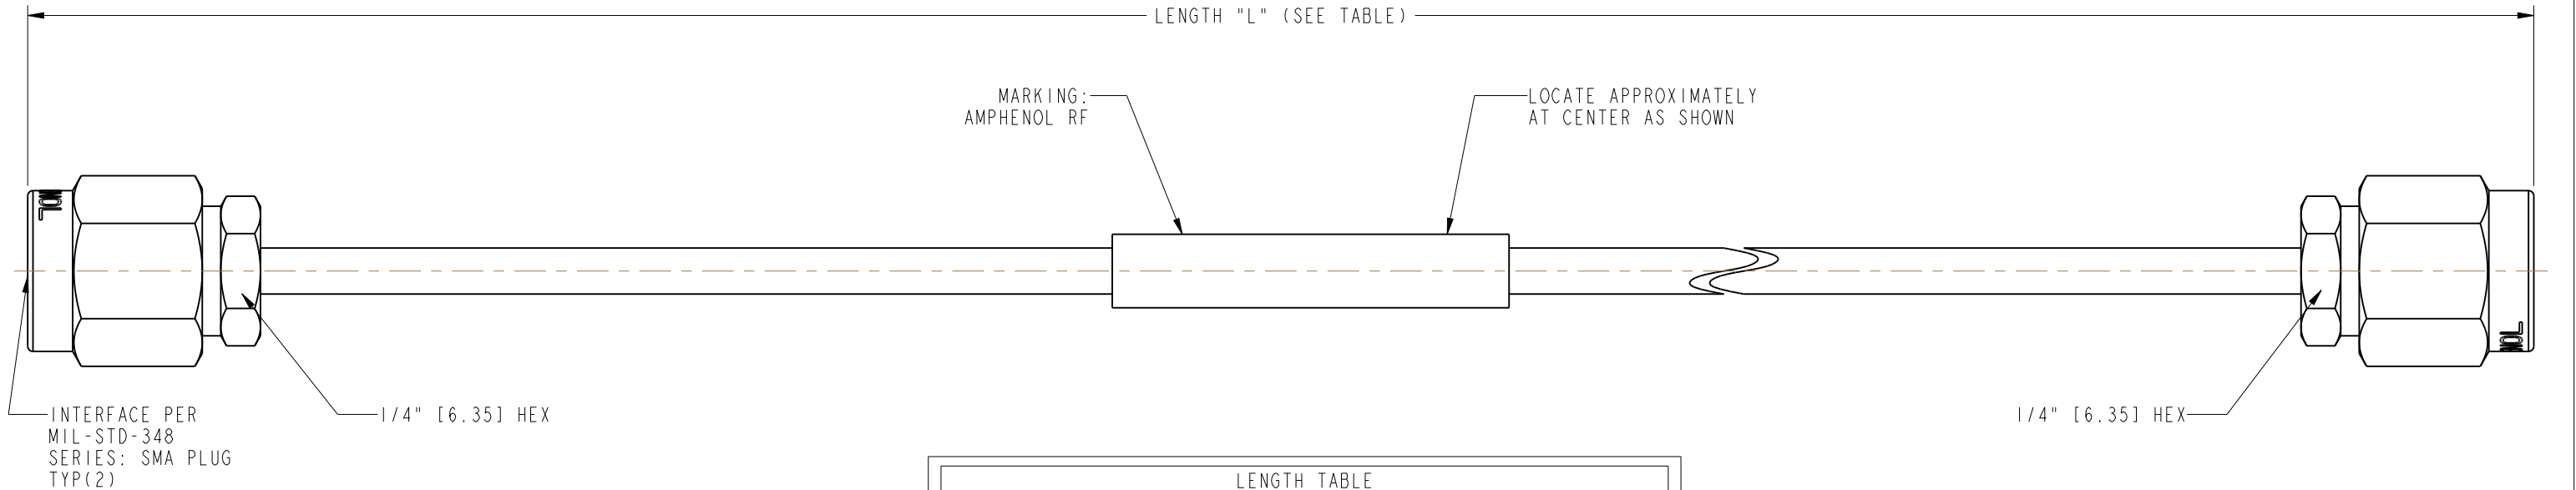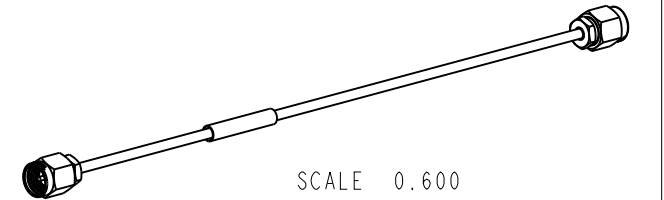

| LENGTH TABLE              |                         |                                  |                            |
|---------------------------|-------------------------|----------------------------------|----------------------------|
| PART NUMBER<br>(IMPERIAL) | PART NUMBER<br>(METRIC) | LENGTH "L" IN<br>INCHES [METERS] | INSERTION<br>LOSS MAX (dB) |
| 95-902-449-003            | -                       | 3.00 [0.076]                     | 0.50                       |
| 95-902-449-004            | -                       | 4.00 [0.102]                     | 0.55                       |
| 95-902-449-005            | -                       | 5.00 [0.127]                     | 0.60                       |
| 95-902-449-006            | -                       | 6.00 [0.152]                     | 0.65                       |
| 95-902-449-007            | -                       | 7.00 [0.178]                     | 0.75                       |
| 95-902-449-008            | -                       | 8.00 [0.203]                     | 0.80                       |
| 95-902-449-009            | -                       | 9.00 [0.229]                     | 0.90                       |
| -                         | 95-902-449M025          | 9.84 [0.250]                     | 1.00                       |
| 95-902-449-010            | -                       | 10.00 [0.254]                    | 1.00                       |
| 95-902-449-012            | -                       | 12.00 [0.305]                    | 1.20                       |
| 95-902-449-018            | -                       | 18.00 [0.457]                    | 1.70                       |
| -                         | 95-902-449M050          | 19.69 [0.500]                    | 1.85                       |
| 95-902-449-024            | -                       | 24.00 [0.610]                    | 2.25                       |
| 95-902-449-036            | -                       | 36.00 [0.914]                    | 3.30                       |
| -                         | 95-902-449M100          | 39.37 [1.000]                    | 3.60                       |

### DESIGN REQUIREMENTS:

X FREQUENCY : DC TO 18 GHz

X VSWR : 1.650 MAX.

|   |                       |
|---|-----------------------|
| X | INS. LOSS : SEE TABLE |
|---|-----------------------|

X CONTINUITY

☒ HI-POT: 500 VRMS

☐ OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

| 2 PLACE DECIMAL  | 3 PLACE DECIMAL  | ANGLES |
|------------------|------------------|--------|
| ±.015 (0,381 mm) | ±.005 (0,127 mm) | ± 1°   |

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

| MATERIAL |
|----------|
|----------|

SEE NOTES

DRAWN

ENGINEER  
VIJIK

APPROVED  
K. CAPOZZI

CAD FILE

DATE \_\_\_\_\_

DATE  
15-01-2015DATE  
12

---

|  |           |
|--|-----------|
|  | T I T L E |
|--|-----------|

SMA STR PLUG TO SMA STR PLUG  
WITH ANTI-TORQUE BODY,  
USING 0.085 CONFORMABLE CABLE,  
VARIOUS LENGTHS

SCALE: 3.3:1.0

WG S  
B

---

CABI

---

2

REV  
B

Amphenol RF

www.amphenolrf.com

DRAWING NO. 95-902-449-XXX

ITEM NO. 95-902-449-XXX

PART NO. 95-902-449-XXX

## CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY