



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-			NEW DRAWING	28NOV2012	Ba.	B.S.
		A1		AWG WIRE RANGE ADDED	12APR2013	WH	B.S.
		A2		AWG WIRE RANGE CHANGED; INDEX 8, 9 ADDED	08JAN2014	WH	T.K.
		-	-		-	-	-

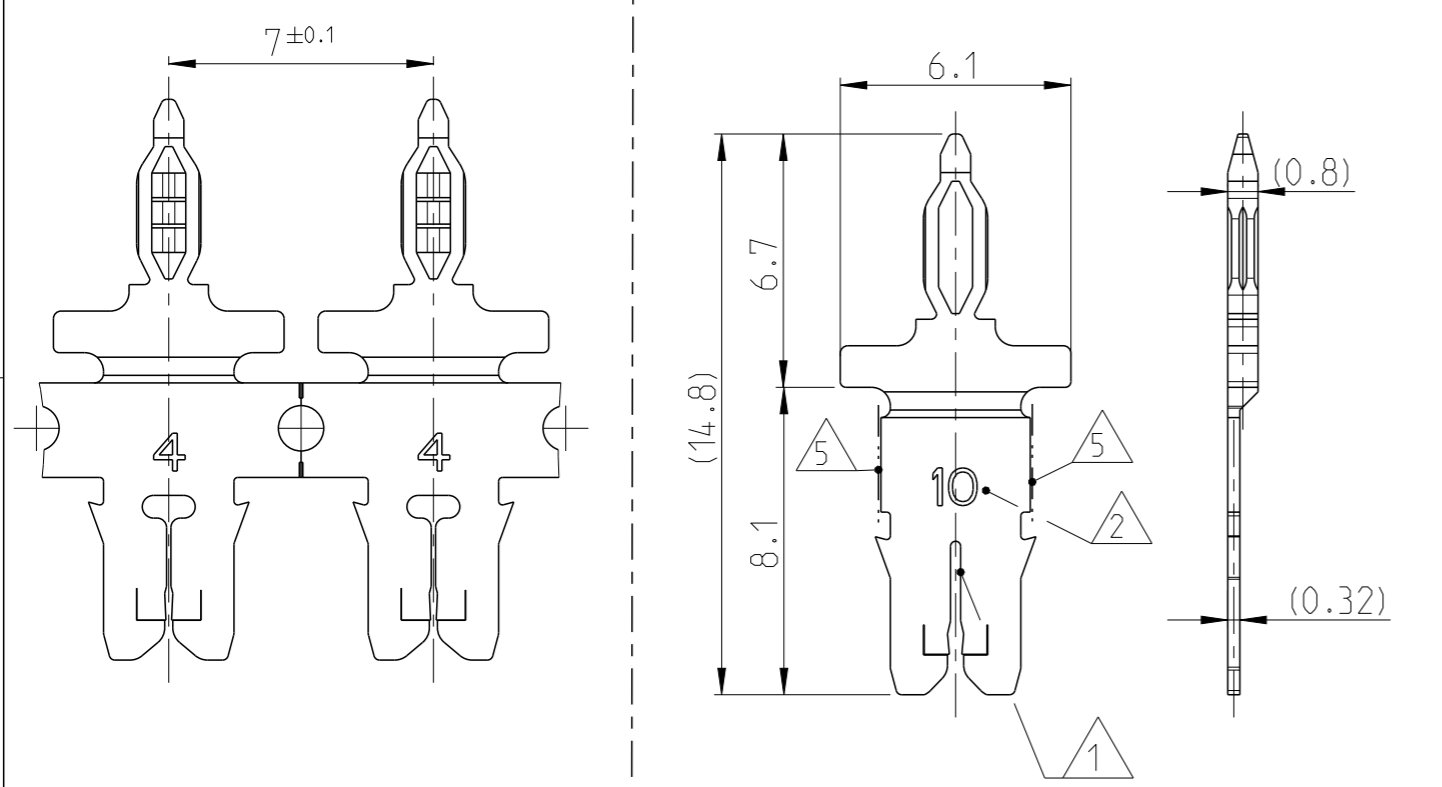

- 1 SLOT ACCEPTS SINGLE OR DOUBLE COPPER MAGNET WIRE SAME DIAMETERS
 - 2 IDENTIFICATION NUMBER FOR MAGNET WIRE RANGE
 - 3 CONTACT CAVITY AND APPLICATION ACC. SPECIFICATION 114-94229
 - 4 PCB LAYOUT, HOLES ACC. SPECIFICATION. 108-90801
 - 5 CUTTING LINE: AREA WILL BE CUTTED OFF BY TERMINATION
 - 6 CAVITY CENTER TO HOLE CENTER
 - 7 DELIVERY STATE: STRIP ON CORRUGATED REEL WITH PAPER INTERLAYER
 - 8 TO BE APPROVED, ON DEMAND BY TE ENGINEERING
 - 9 MAX. 2 SPLICES PER REEL; SPLICES BE NOT BONDED TOGETHER
- } SEE TABLE

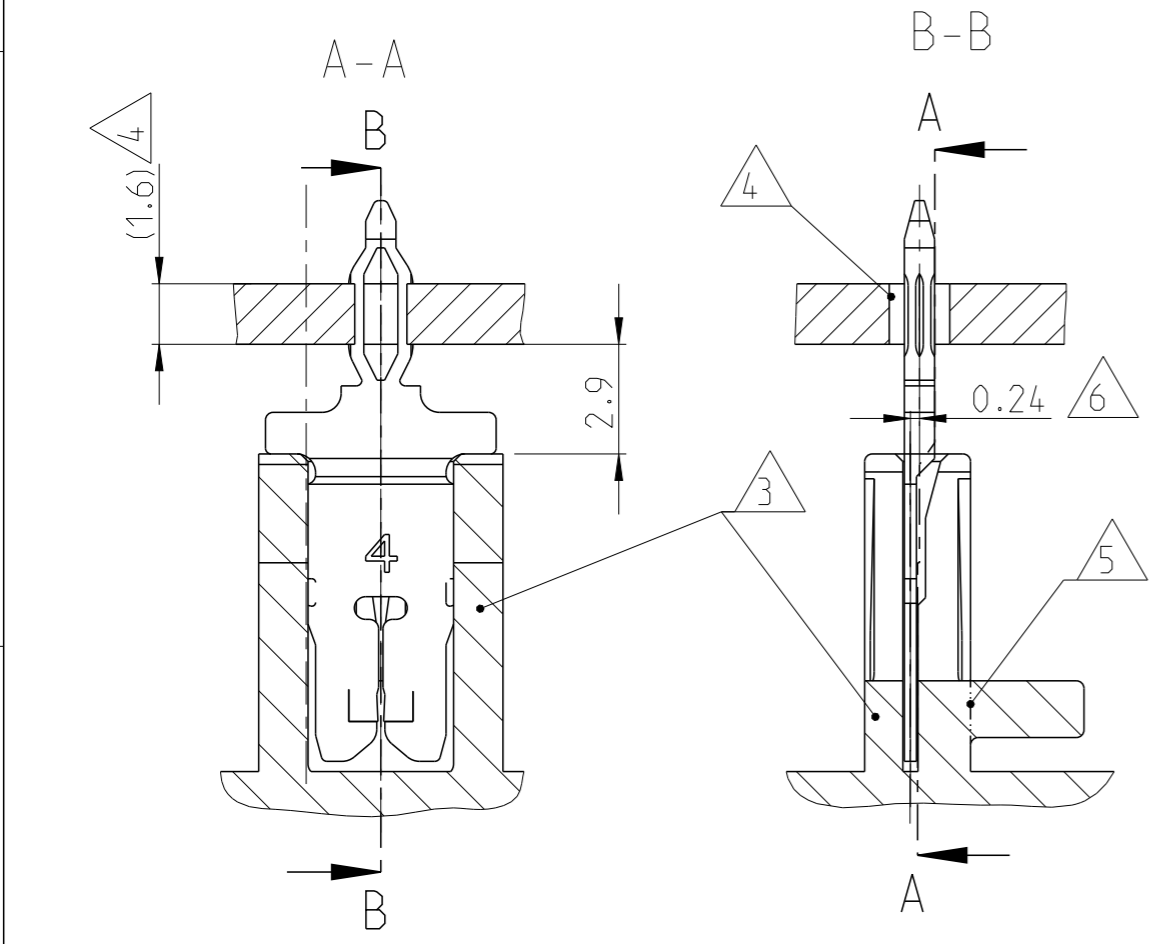

IDENTIFICATION NO	DOUBLE WIRE		SINGLE WIRE		REV.	PART NO
	1	2	1	2		
24	-	19.5 - 17.5; 17	-	∅ 0.85mm to ∅ 1.12mm	A	2120747-2
12	-	22.5 - 20; 19.5	-	∅ 0.63mm to ∅ 0.85mm	A	2120746-2
10	26 - 23	26 - 22.5	∅ 0.4mm to ∅ 0.56mm	∅ 0.4mm to ∅ 0.63mm	A	2120745-2
6	29.5 - 26.5; 26	29.5 - 26.5; 26	∅ 0.265mm to ∅ 0.4mm	∅ 0.265mm to ∅ 0.4mm	A	2120744-2
4	33 - 30; 29.5	33 - 30; 29.5	∅ 0.18mm to ∅ 0.265mm	∅ 0.18mm to ∅ 0.265mm	A	2120743-2

DIRECTION TOP OF REEL

1:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H. Ballmert 28NOV2012
 CHK B. Schnaubelt 30NOV2012
 APVD T. Klenner 30NOV2012

DIMENSIONS: mm
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±0.2
 1 PLC ±0.2
 2 PLC ±0.2
 3 PLC ±0.2
 4 PLC ±0.2
 ANGLES ±1°

MATERIAL CuNiSi
 FINISH TINNED

PRODUCT SPEC 108-94366
 APPLICATION SPEC 3

NAME MAG-MATE Slim Line Contact with Multispring

SIZE A3 CAGE CODE 00779 DRAWING NO C-2120743 RESTRICTED TO -

Customer Drawing SCALE 5:1 SHEET 1 OF 1 REV A3