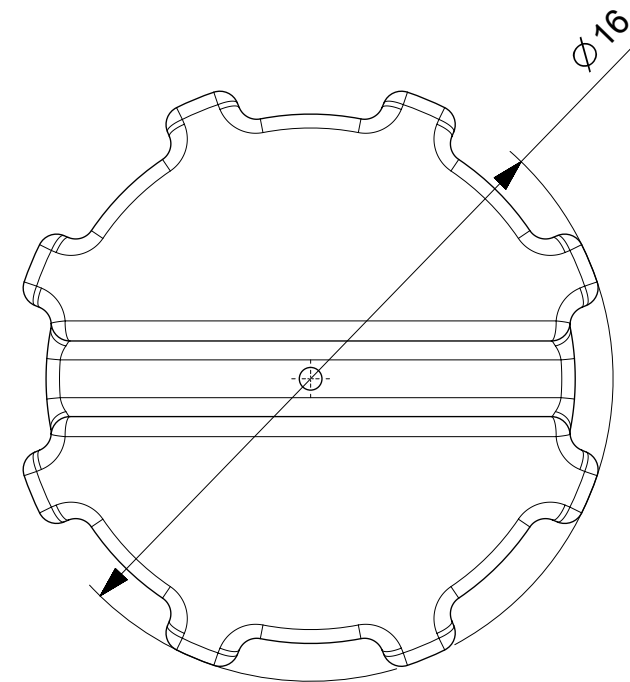
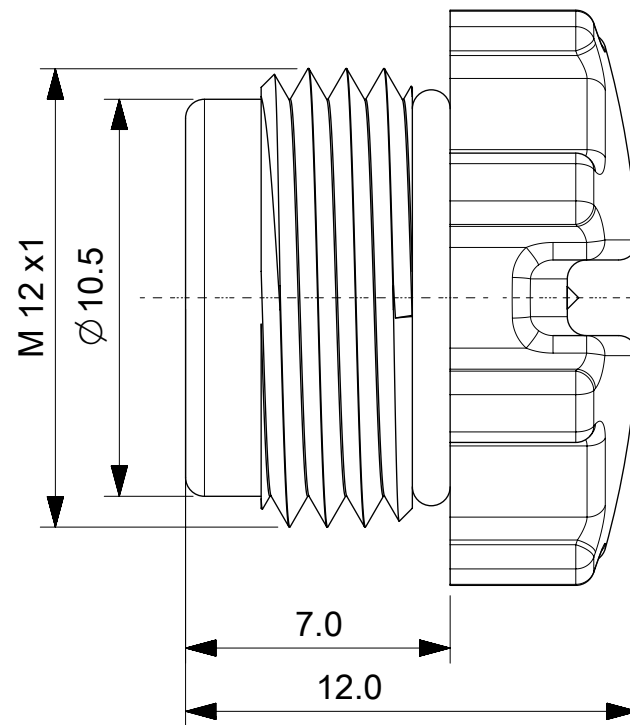
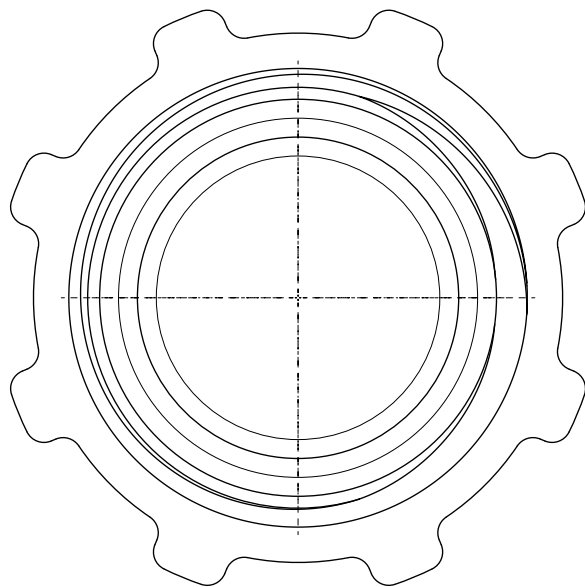


NOTES / Bemerkungen:

1) MATERIAL: PA66-GF25 black, Ultramid A3X2G5 BK
Material: PA66-GF25 schwarz, Ultramid A3X2G5 BK

2) FLAMMABILITY: UL94: V0
Brennbarkeit: UL94: V0

3) IP67 RATED ACHIEVED WHEN PROTECTION CAP IS MATED WITH
M12 CONNECTOR (ACCORDING IEC 61076-2-101)
AND FIXED WITH LOCKED TORQUE: 0,5 Nm.
Schutzart IP67 wird erreicht wenn die Schutzkappe
mit einem M12 Steckverbinder, nach IEC 61076-2-101,
montiert und mit einem Drehmoment: 0,5 Nm, angezogen wird.

4) TEMPERATURE RANGE: -40°C +115°C
Temperatur Bereich: -40°C +115°C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
QUALITY SYMBOLS		2016/01/25 2016/02/05 2016/02/05 EC NO: 102635 DRWN: JELIZAINCIN CHK'D: RSILLER APPR: RSILLER A REV				GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
FA = 0						ANGULAR TOL ± 1.0 °		mm		5:1							
F = 0						4 PLACES ±		DRWN BY		DATE		ACC PCAP M12 FE OR 9X1					
FD = 0						3 PLACES ±		JELIZAINCIN		2016/01/25							
FT = 0						2 PLACES ± 0.05		CHK'D BY		DATE							
TA = 0						1 PLACE ± 0.1		APPR BY		DATE		PRODUCT CUSTOMER DRAWING					
TC = 0						0 PLACES ± 0.2		RSILLER		2016/02/05							
TA = 0						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER	
TA = 0								A3				120358		1203580007			
TA = 0												DOCUMENT NUMBER		DOC TYPE		DOC PART	
TA = 0								1203580007		PSD		010		1 OF 1			