Between-Series Adapters


SMA to BMA

SMA Female Jack to BMA Female Jack




ADT-2767-SF-BMF-02

SPECIFICATIONS Frequency: DC - 18.0 GHz VSWR: 1.05 + .005 f (GHz) Impedance: 50 Ohms Finish: Passivated Stainless Steel





SMA Female Jack to BMA Female Jack - Floating Panel Mount

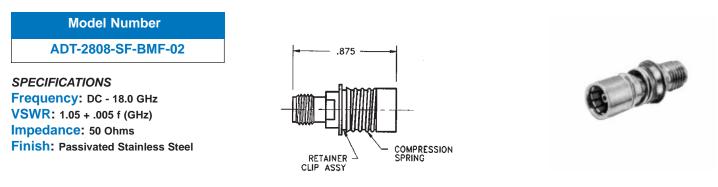

SMA Female Jack to BMA Female Jack - Floating Panel Mount

