
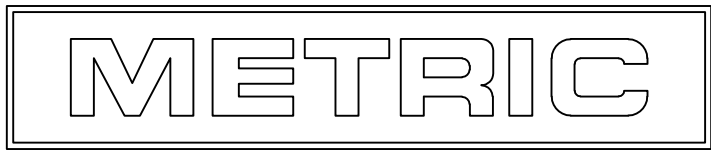
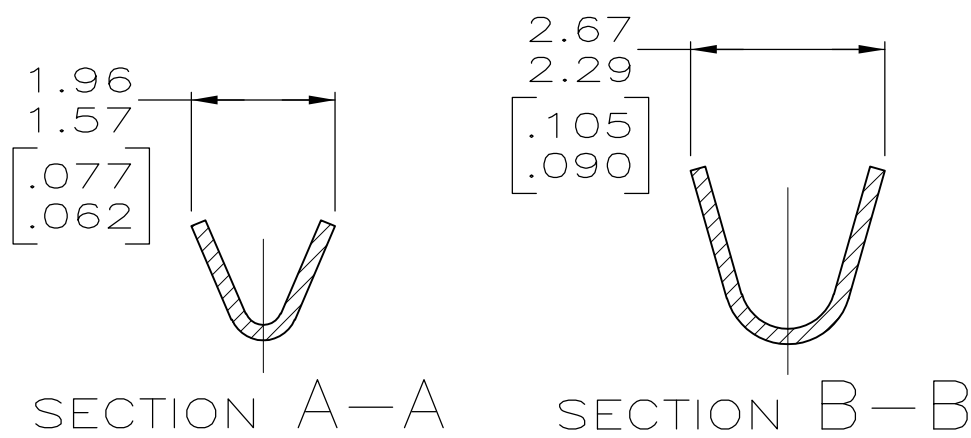
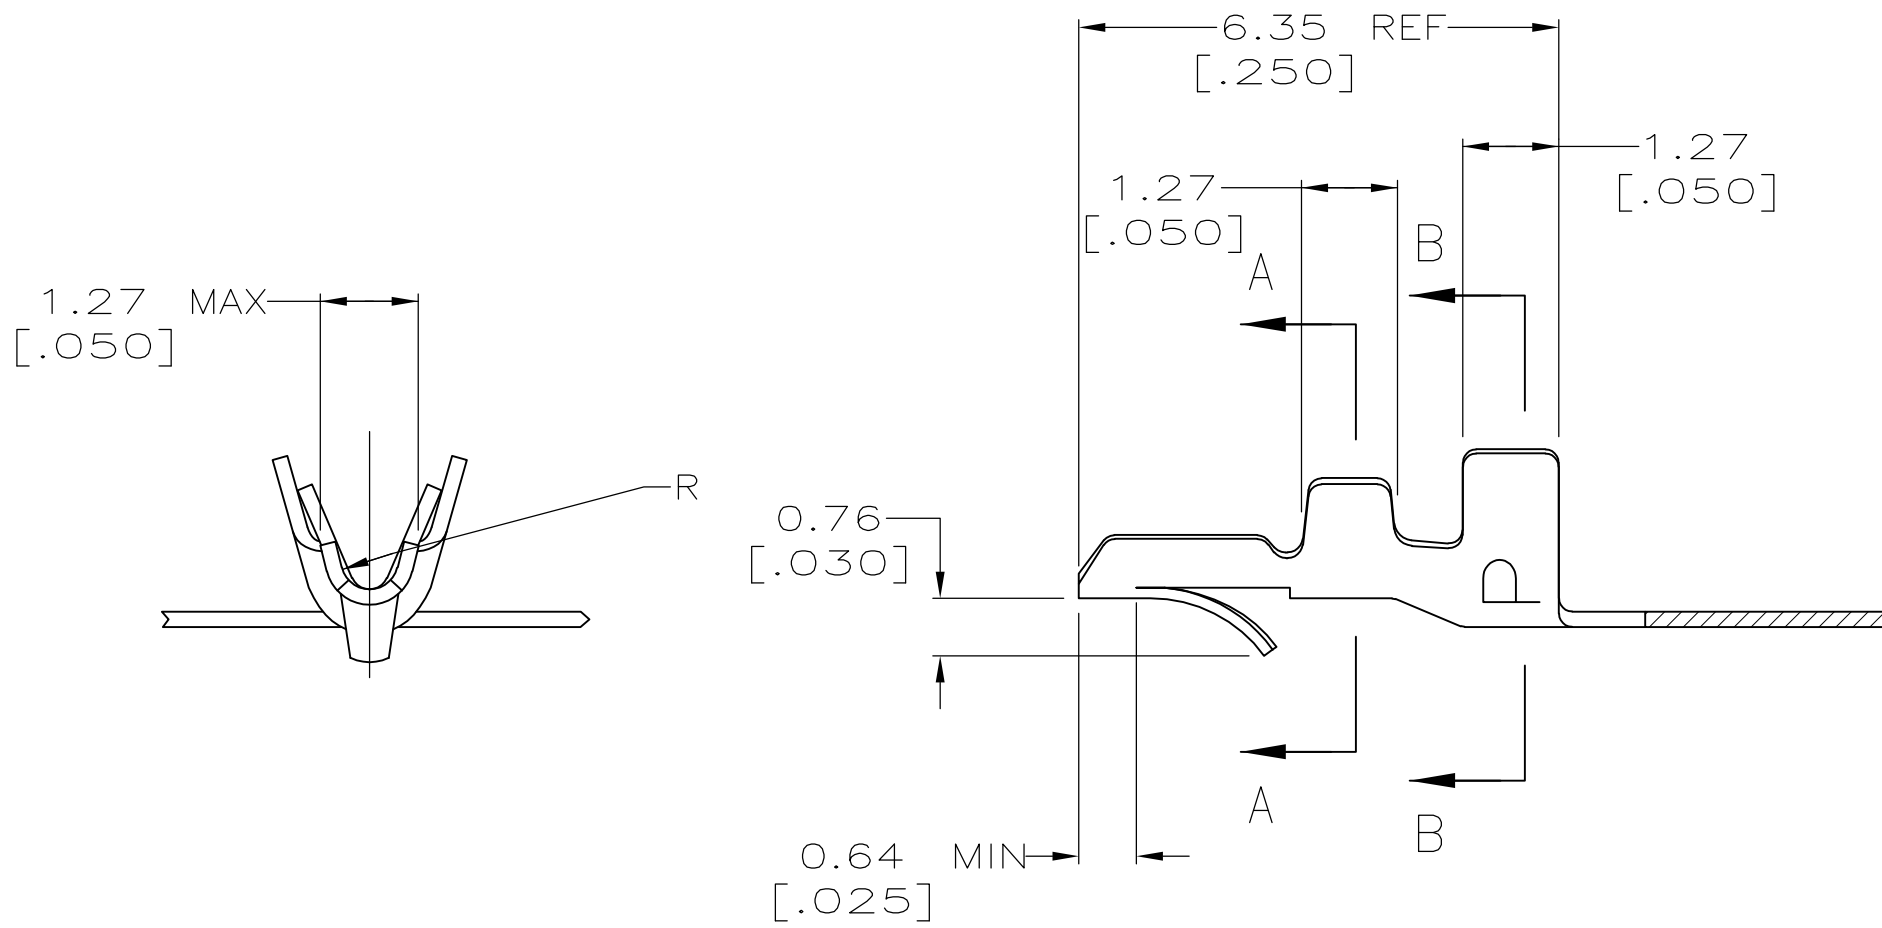
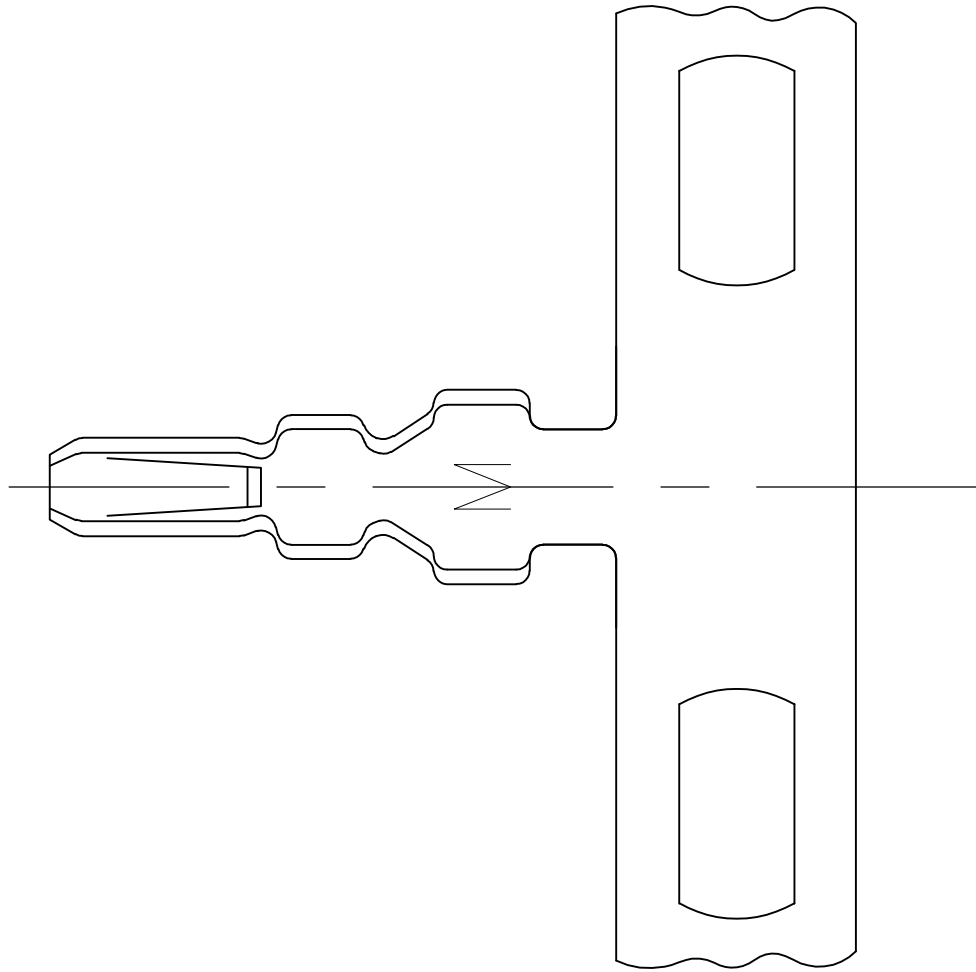


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		J1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
2. PARTS CAPABLE OF BEING APPLIED BY AMPOMATER.
3. 0.00508 [.000200] MIN BRIGHT TIN-LEAD.
4. WIRE RANGE: 0.12 - 0.4 mm² (26 - 22 AWG).
5. INSULATION RANGE: 1.02 - 1.78 [.040 - .070] DIA.
6. DIMENSIONS IN BRACKETS ARE IN INCHES.
7. 0.00508 [.000200] MIN BRIGHT TIN.

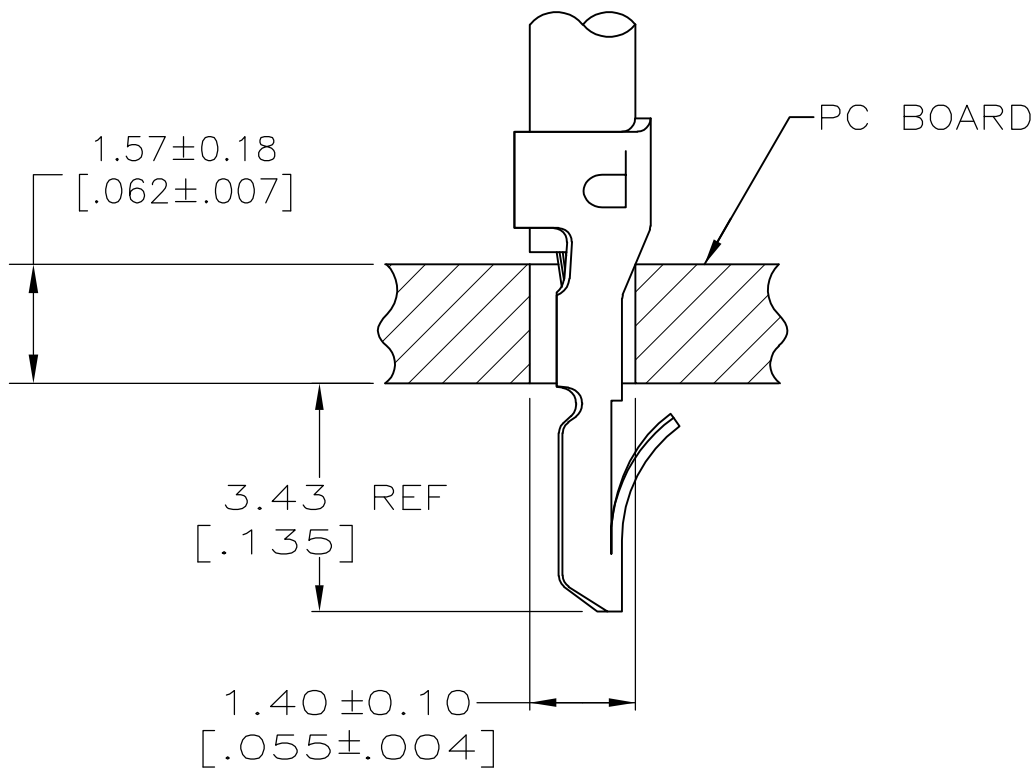

7	0.20[.008] PH BRZ	3-640663-1	
3	0.20[.008] PH BRZ	640663-1	
FINISH	MATERIAL	PART NO	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
DWN S. CARPENTER	21AUG2003	TE Connectivity	
CHK J. ELLIS	21AUG2003		
APVD J. ELLIS	21AUG2003		
PRODUCT SPEC			
APPLICATION SPEC		NAME MINI AMP-IN™	
114-1016			
WEIGHT			
CUSTOMER DRAWING			
SCALE		SHEET	REV
10:1		1 OF 1	J1