

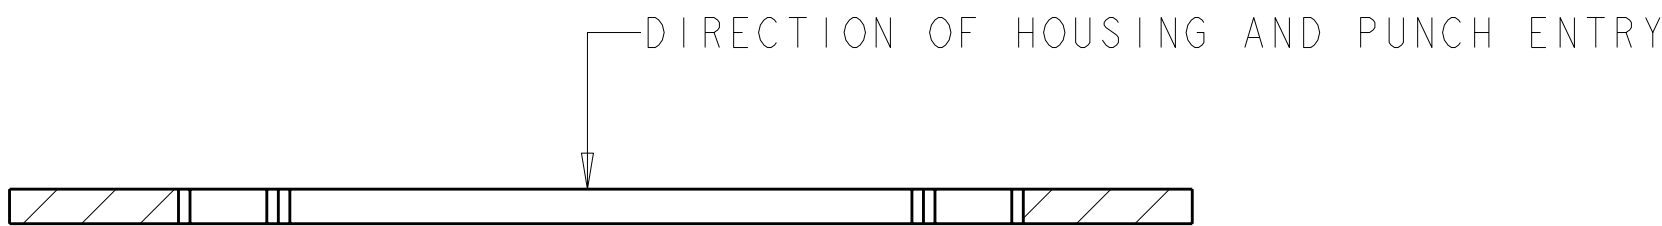


LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			R1	REVISED PER ECO-11-005294	06APR2011	RK	HMR	

1. THIS PLUG TO BE USED WITH CAP 480426.
2. TO BE USED WITH MATE-N-LOK SOCKETS.
3. RECOMMENDED PANEL THICKNESS 0.64 - 1.65 [.025 -.065].
- △ DIMENSIONS TO BE EQUAL WITHIN 0.13 [.005].
5. THE PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
6. BOTH LOCKING LEGS ARE TO BE SQUEEZED TOGETHER AND HOUSING INSERTED "STRAIGHT IN" AS OPPOSED TO A ROCKING MANNER OF INSERTION.
7. PANEL MUST NOT HAVE ANY MATERIAL (PAINT, PORCELAIN, ETC.) APPLIED IN THE MOUNTING HOLE AREA THAT WOULD DECREASE RETENTION OF THE HOUSING IN THE PANEL.
8. IF NOTES 5 AND 7 ARE NOT COMPLIED WITH THE 27.94 [1.100] DIMENSION SHOULD BE REDUCED TO 27.43 [1.080] TO ASSURE PROPER RETENTION IN THE PANEL.
9. DIMENSIONS IN BRACKETS ARE IN INCHES.)

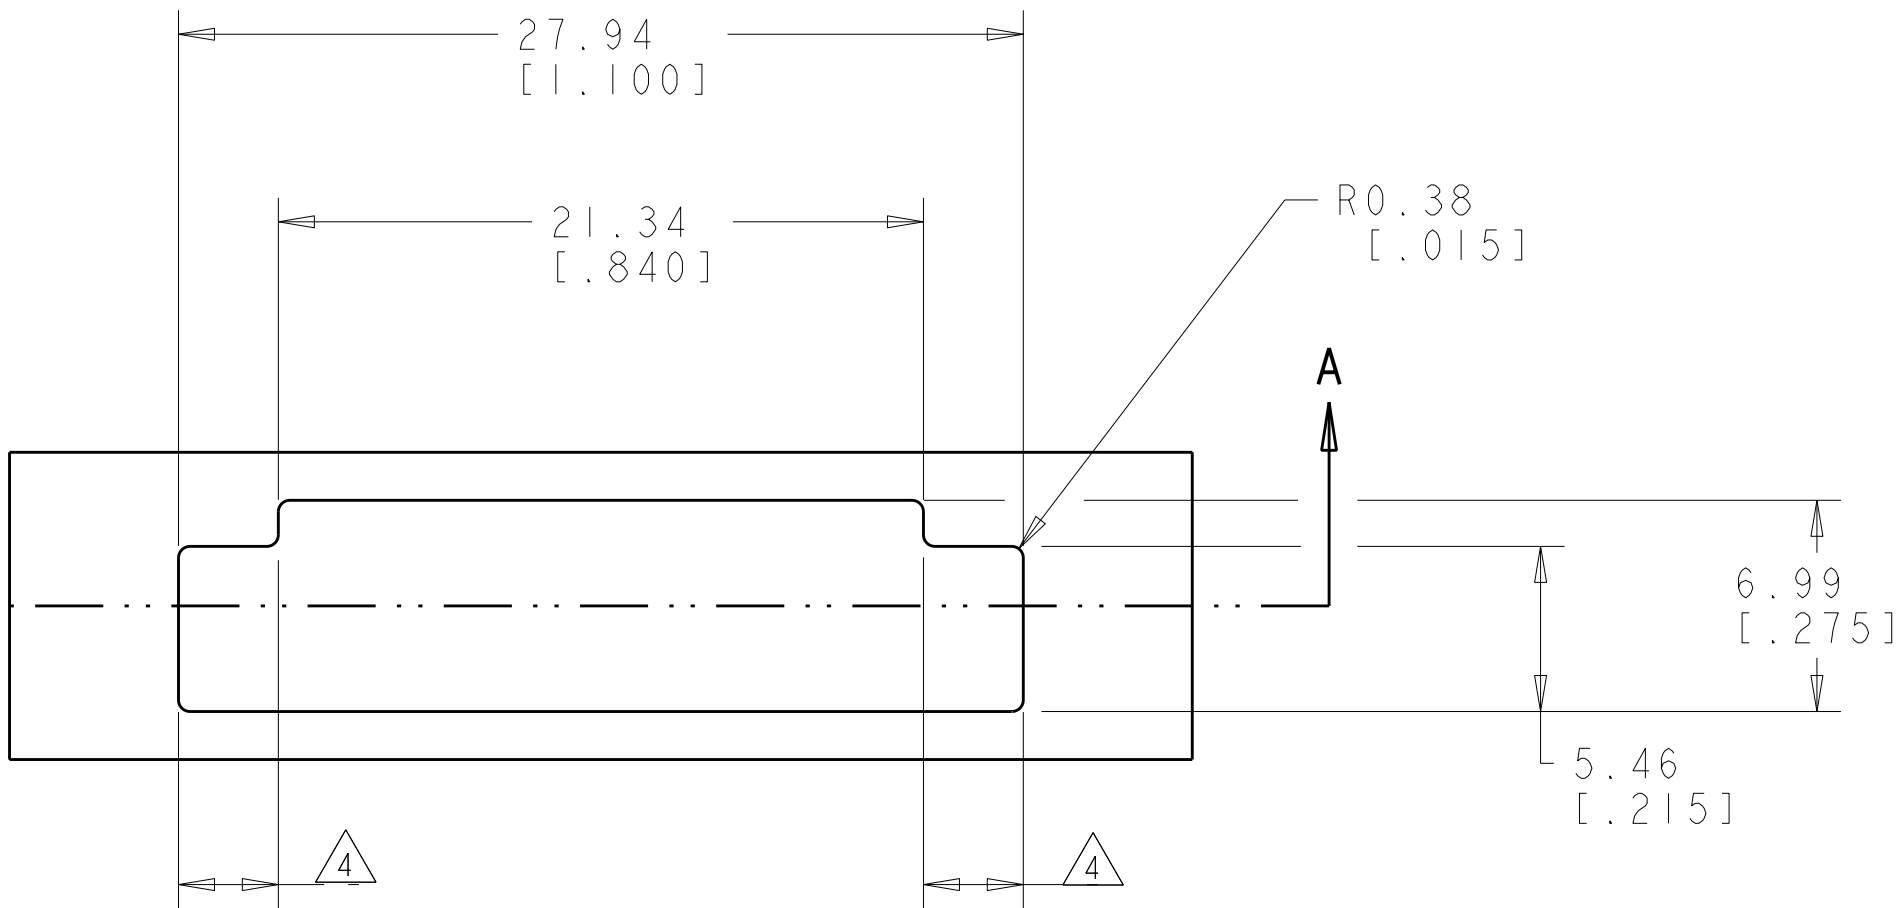

SECTION A-A
RECOMMENDED MOUNTING INFORMATION
SCALE 4:1

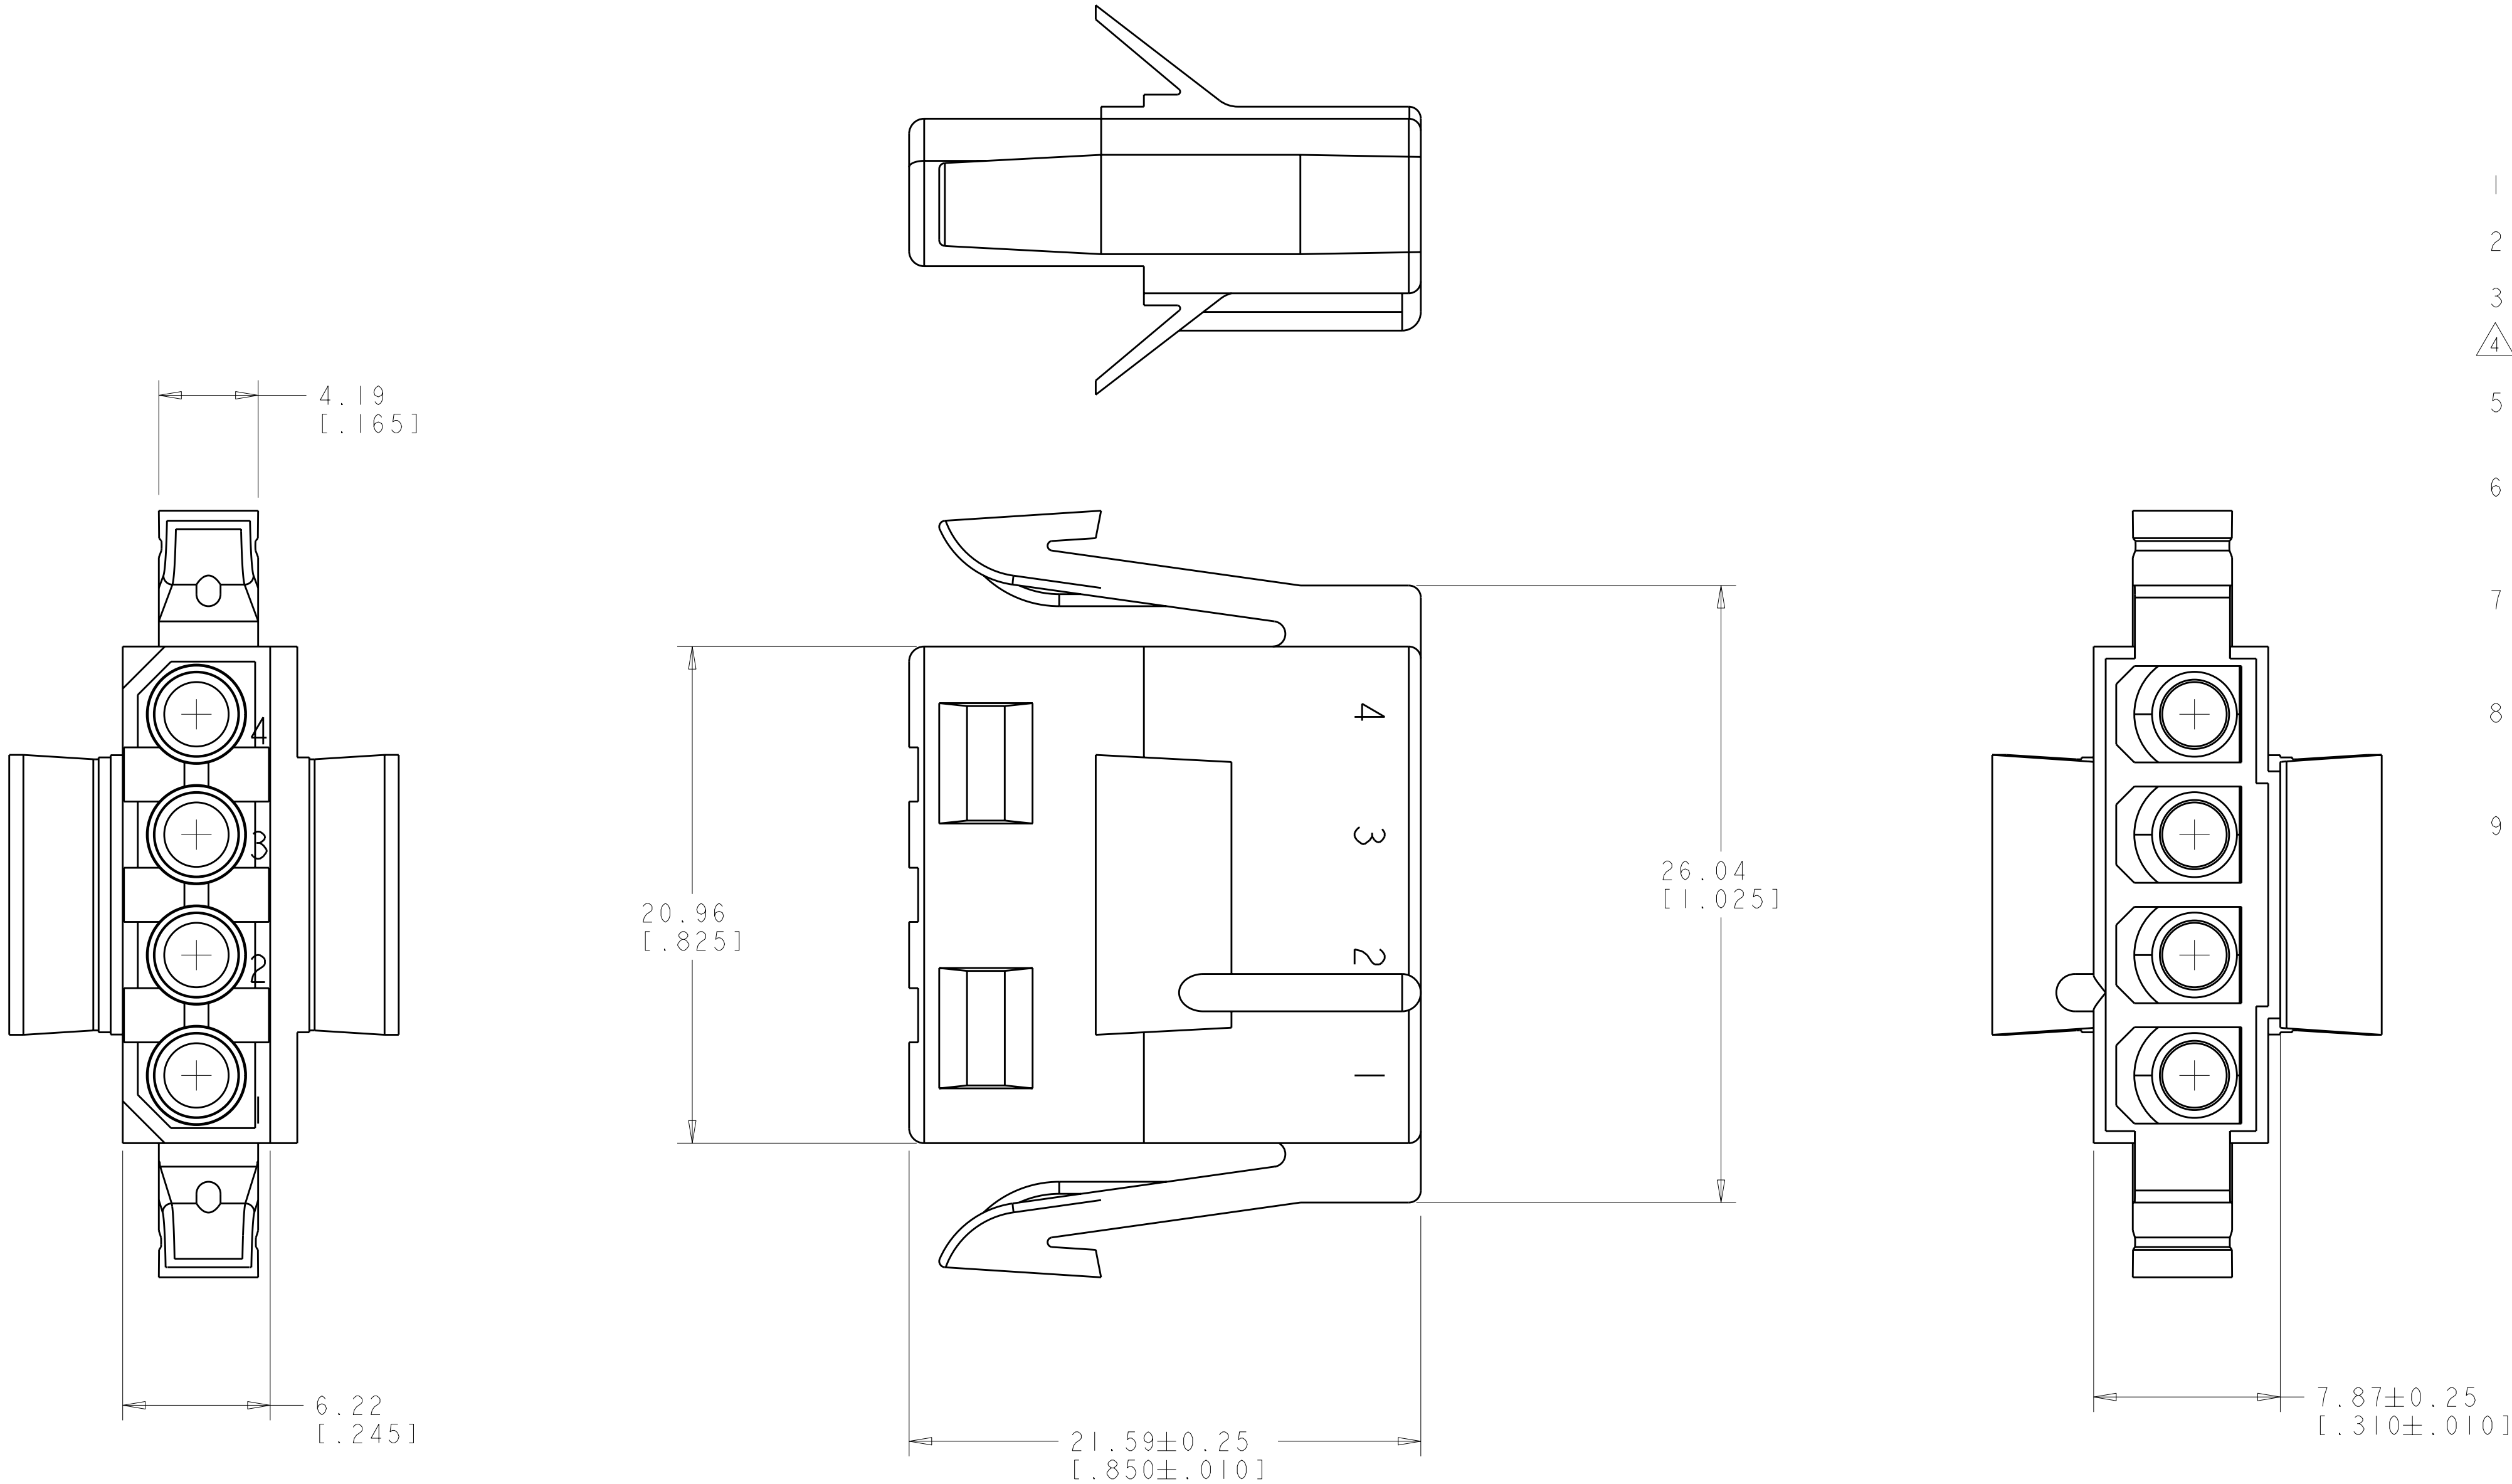

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER 05-OCT-2001	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK D. COLEY 05-OCT-2001		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 05-OCT-2001	NAME PLUG, 4 CIRCUIT, PANEL MOUNT, MATE-N-LOK™	
9 PLC ±		PRODUCT SPEC	SIZE	
1 PLC ±		APPLICATION SPEC	CAGE CODE	
2 PLC ±0.13 [.005]		WEIGHT	DRAWING NO	
3 PLC ±		CUSTOMER DRAWING	A100779C=480425	
4 PLC ±		SCALE	5:1	
ANGLES ±0°30'		SHEET	1 OF 1	
FINISH		REV	R1	