

# Horizontal Test Jack Insulated Ruggedized: Military Type

## SPECIFICATIONS

**Contact:** Copper aluminum alloy\*

**Finish:** Gold or Silver


**Body:** Nylon 6/6 per ASTM D4066

## RATINGS

**Current:** 5 amps

**Breakdown Voltage:** 2500 Vrms minimum

**Contact Resistance:** Gold: 0.005 ohms maximum

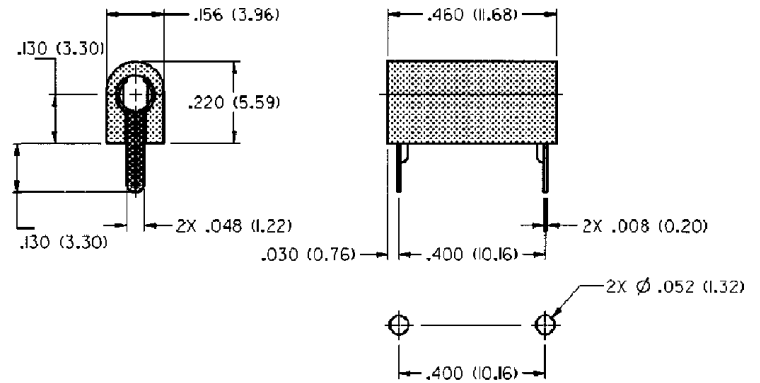

MOUNTING HOLE LAYOUT

### SILVER PLATING

105-2202-101	Red
--------------	-----

For Standard Tip Plug: .080 (2.00) Diameter

## FEATURES:

- Contact protected from flux and solder
- Probe access from both ends
- Nylon UL approved for self extinguishing
- For Military or Industrial Applications

\* A new material development  
that, for this application, meets or exceeds beryllium copper.