

F

E

D

C



B

A


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF VICOR CORP.

REVISIONS				
REV	DESCRIPTION		DATE	APPROVED
1	RELEASED PER E071233	REJH	06/15/07	EM
2	REVISED PER E090673C	AR	04/22/09	REJH
3	REVISED PER E064291	JS	09/10/09	REJH
4	REVISED PER E101310b	KUK	10/22/10	AR

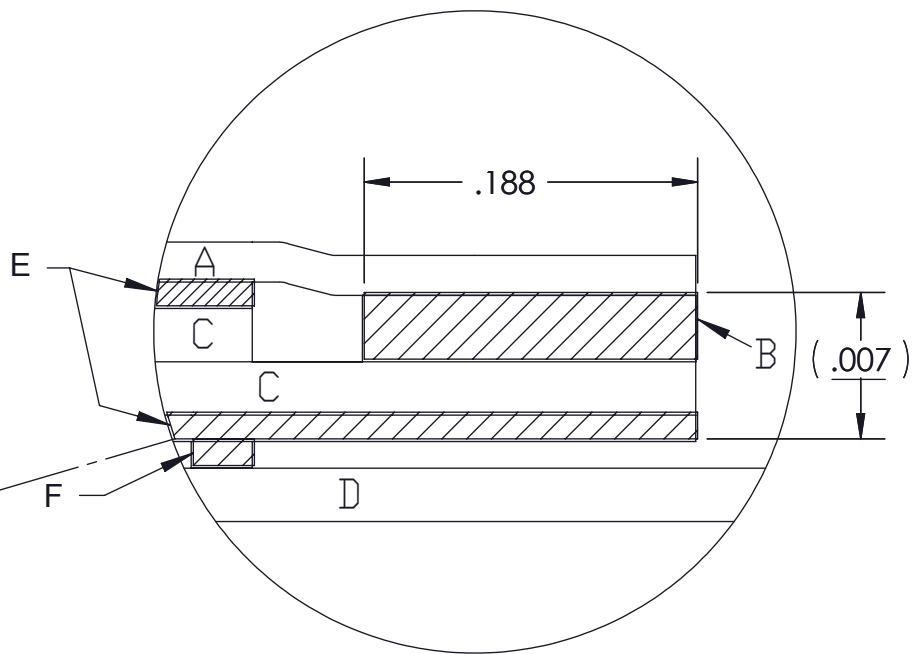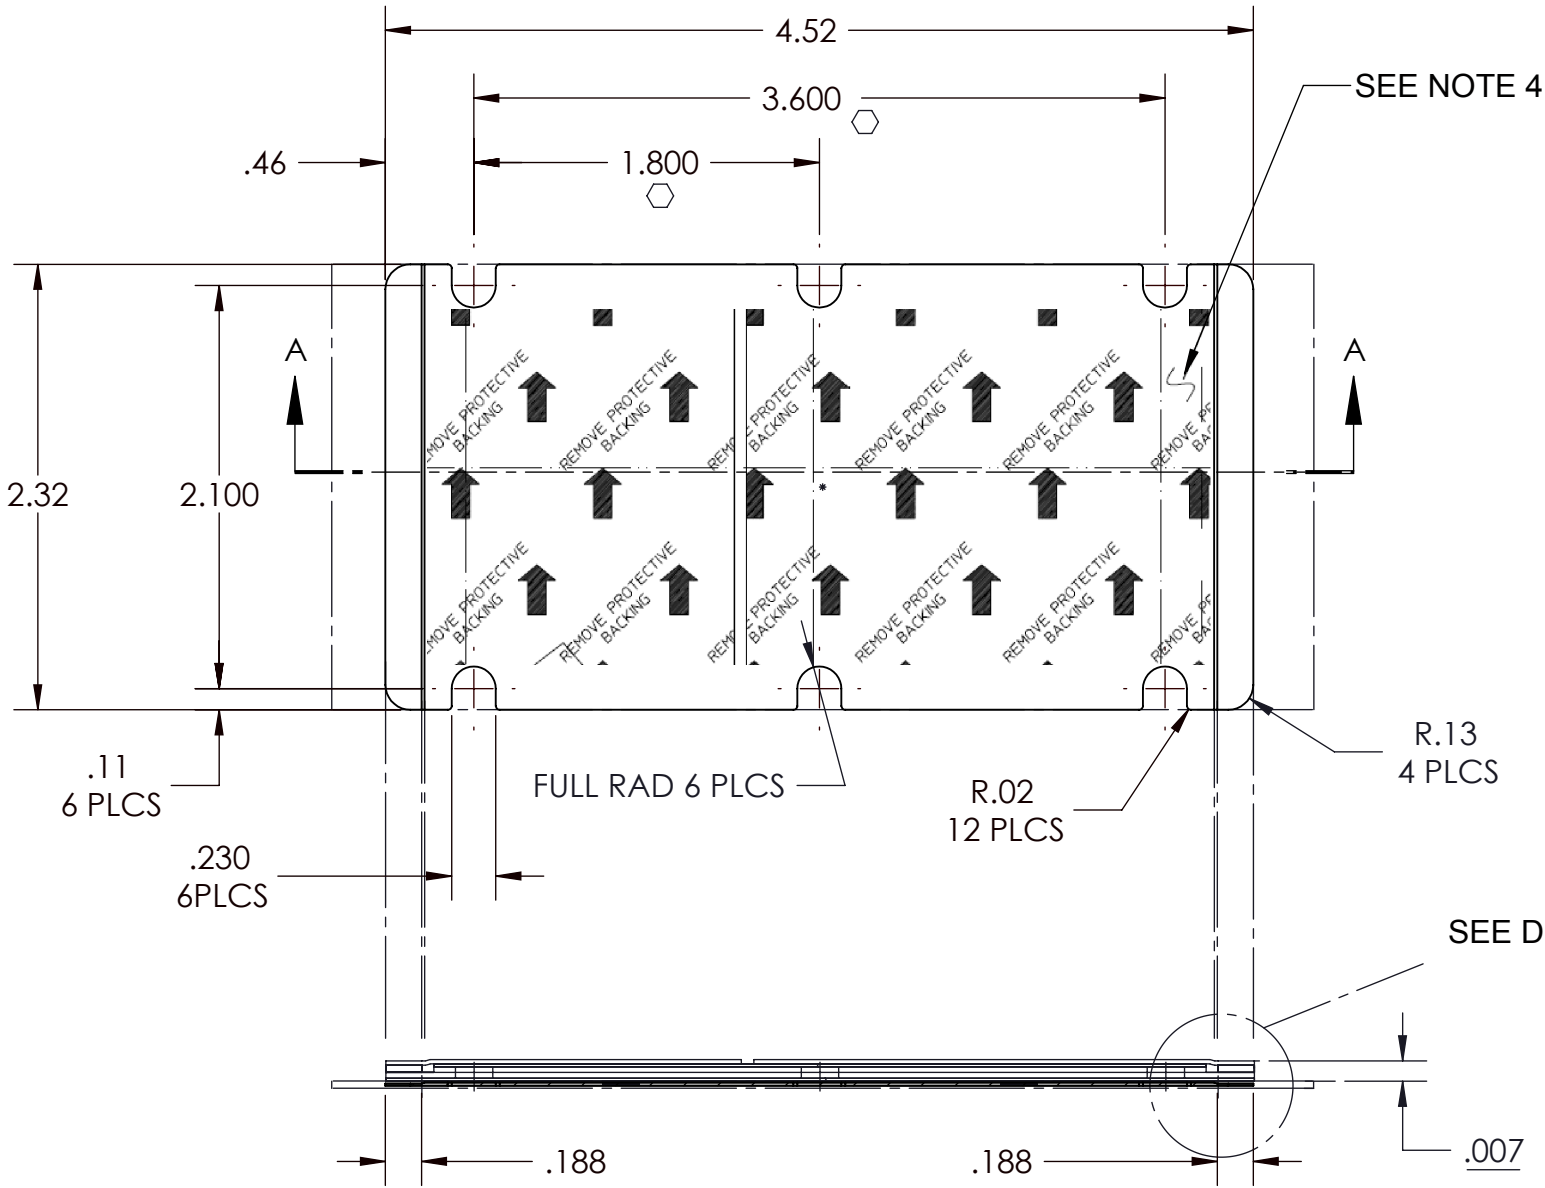

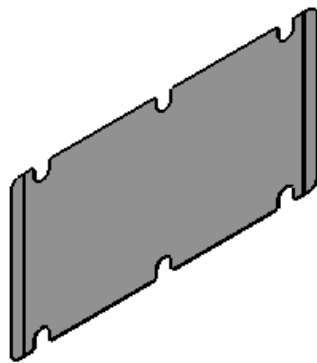

DETAIL :
A. SPLIT RELEASE LINER.
B. ADHESIVE STRIP; .0025 THICK .188 WIDE.
C. ALUMINUM ALLOY 1145-0; .002 THICK.
D. ROLL CARRIER WITH ADHESIVE STRIP BONDING.
E. PHASE CHANGE THERMAL COMPOUND.
F. ADHESIVE STRIPS ON ROLL CARRIER.



- NOTES:
1. MATERIAL: MAKE FROM HENKEL AL-2-45H-232.
 2. THICKNESS: .007±.001.
 3. SEE DETAIL FOR ASSY ORDER.
 4. FOR ARTWORK SHOWN HERE SEE DWG# 20200.
 5. ○ DENOTE CRITICAL CHARACTERISTIC FOR LOT INSPECTION.
 6. RoHS COMPLIANT PER CST-0001 LATEST REVISION.
 7. PRIOR TO ASSEMBLY, PRODUCTS SHALL BE STORED IN A COOL, DRY LOCATION IN ORIGINAL PACKAGING AT TEMPERATURES BELOW 40 ± C (104 ± F). UNDER THESE CONDITIONS THE SHELF LIFE IS INDEFINITE. THERMMATE PADS CAN BE PRE-APPLIED TO BASEPLATES OR HEAT SINKS WHICH ARE THEN SHIPPED TO A FINAL ASSEMBLY LOCATION, AS LONG AS THE TEMPERATURE DOES NOT EXCEED THE LEVEL INDICATED ABOVE.

SECTION A-A
(VERTICAL THICKNESS IS NOT SHOWN TO SCALE)

	DRAWN	DATE				SWD
	RCM	8/20/98	<div><i>THERMAL INTERFACE PAD</i></div> <div><i>THERMATE (VI-200)</i></div> <div><i>P/N 20266</i></div>			
MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH [MM] TOLERANCES ARE: DECIMALS ANGLES X.XX [X.X] = ±0.01 [0.25] ±1° X.XXX [X.XX] = ±0.005 [0.127]					
FINISH	THIRD ANGLE PROJECTION		SIZE	CAGE CODE	DWG NO	REV
			B	67131	19459	4
	DO NOT SCALE DRAWING		SCALE 1: 1		SHEET 1 OF 1	