

— , 4:1 .

ALL RIGHTS RESERVED.


A

LOC	DIST —	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

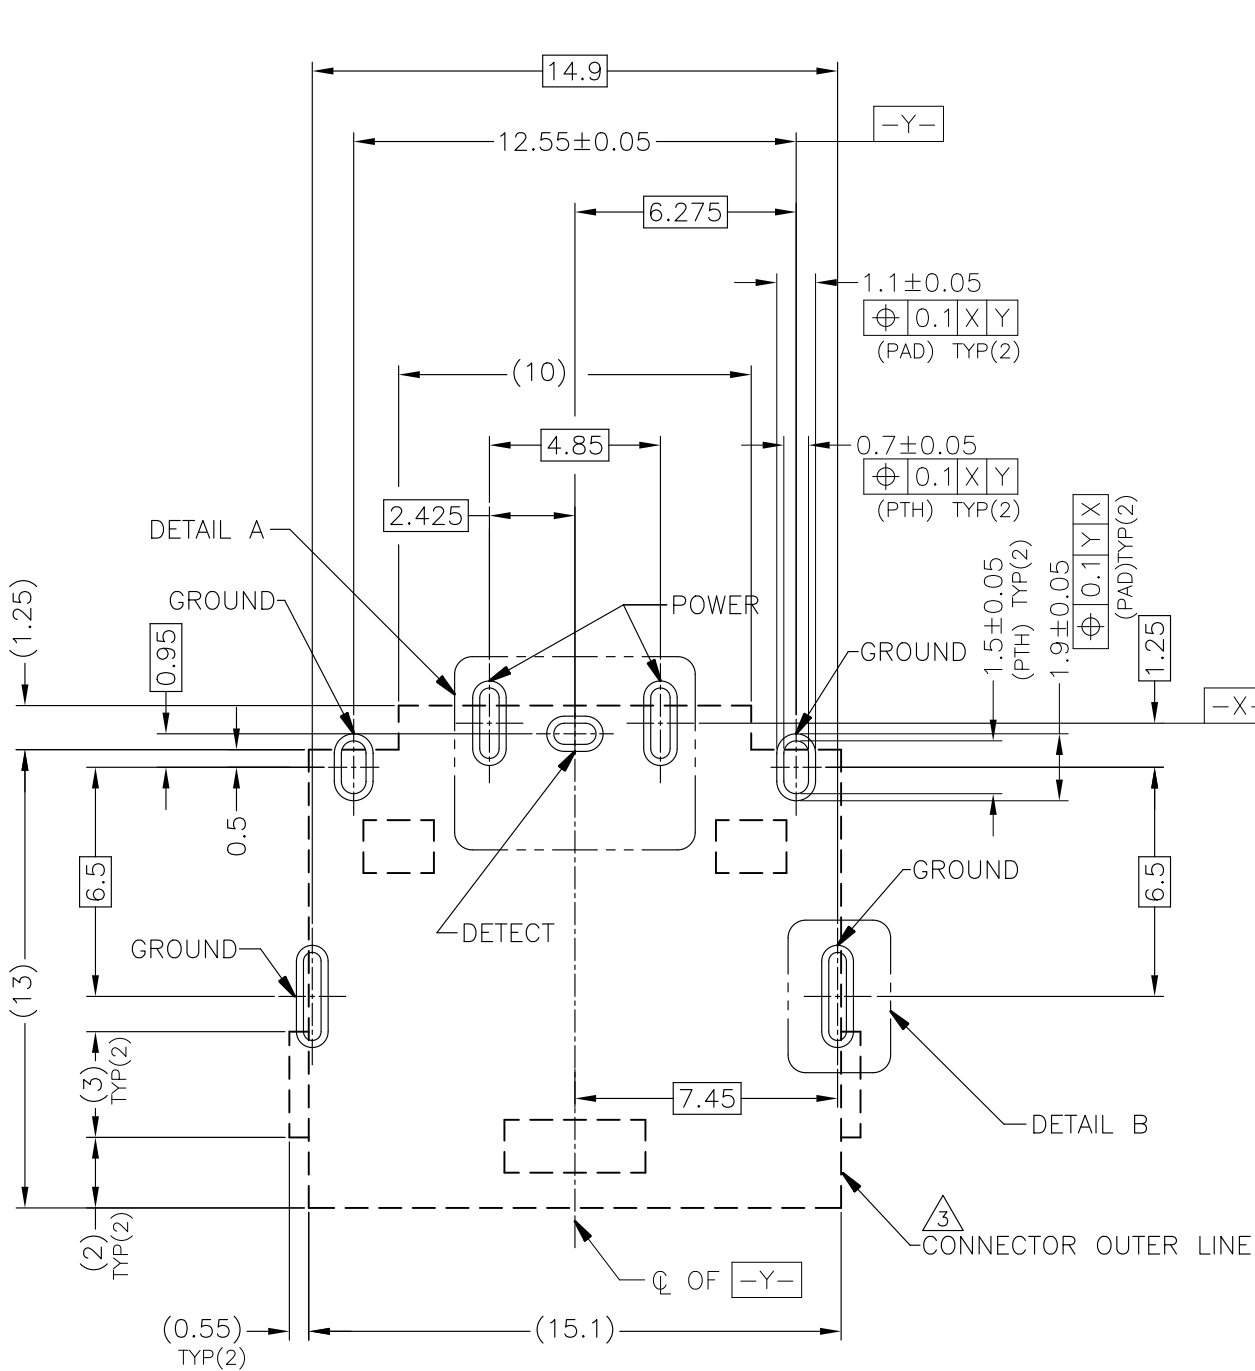


RECOMMENDED P.C.BOARD PATTERN LAYOUT (TOP VIEW)
TOLERANCE:±0.05 (THICKNESS=0.8mm)


△ [] : CONNECTOR OUTER LINE (NO COMPONENT AREA)

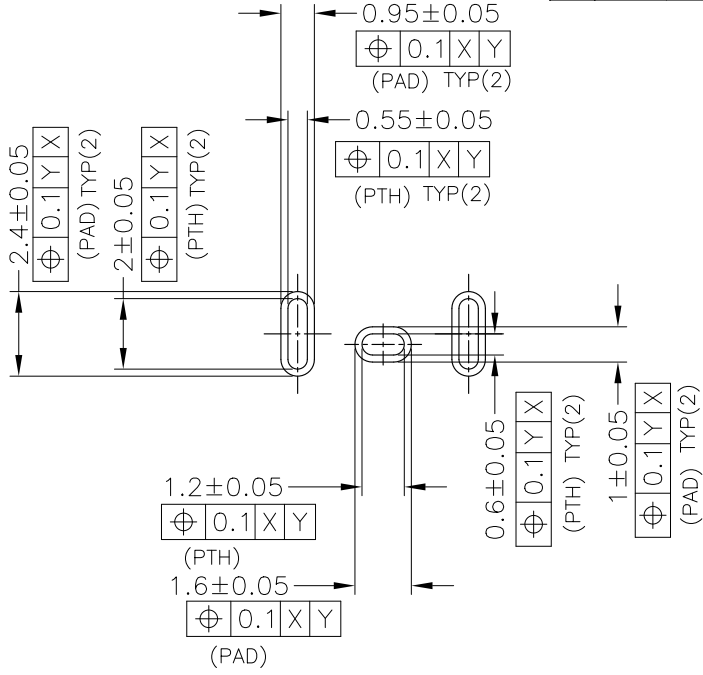

DETAIL A

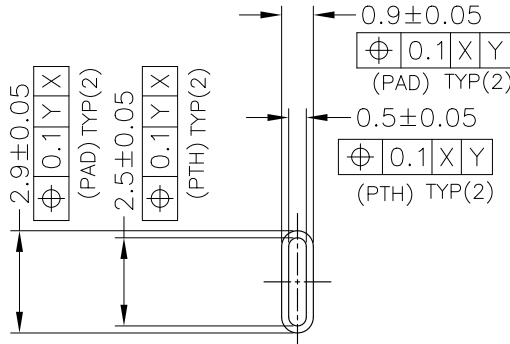




DETAIL B

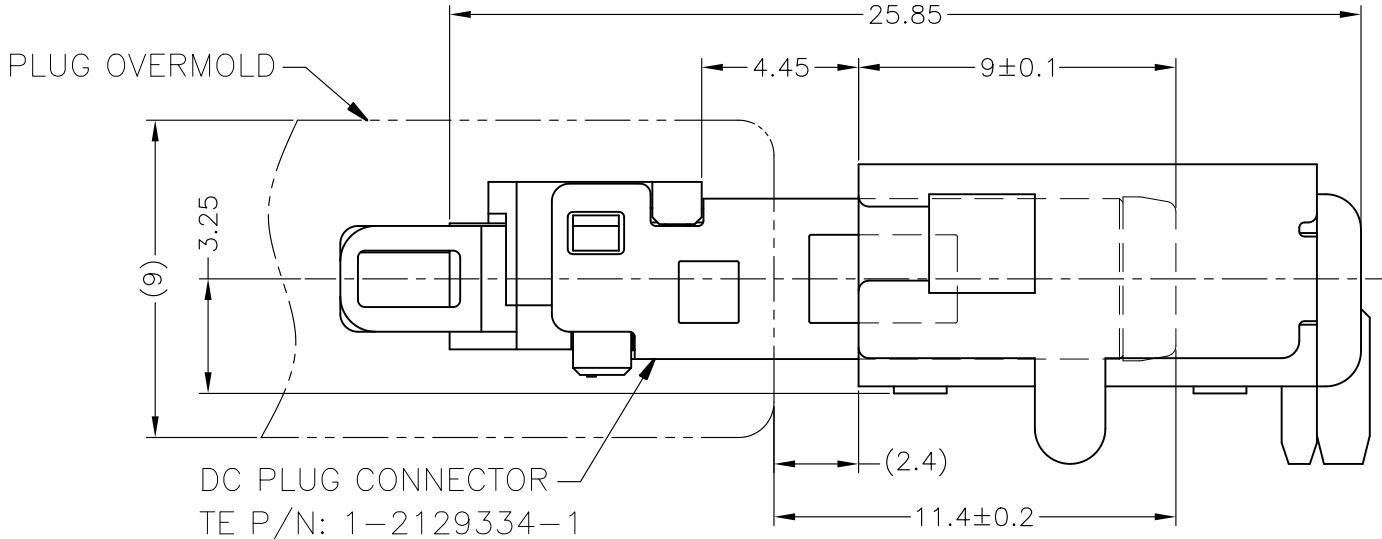


MATING CONDITION

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN		TE Connectivity		
			CHK				
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME DC POWER JACK CONNECTOR DIP TYPE (10.7A)		
mm							
			0-PLC 1-PLC 2-PLC 3-PLC 4-PLC ± ± ± ± ± ±0.25 ±3°				
			PRODUCT SPEC				
			APPLICATION SPEC				
MATERIAL			WEIGHT		SIZE		
					CAGE CODE		
					DRAWING NO		
					RESTRICTED TO		
					A300779		
					C-2129458		

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

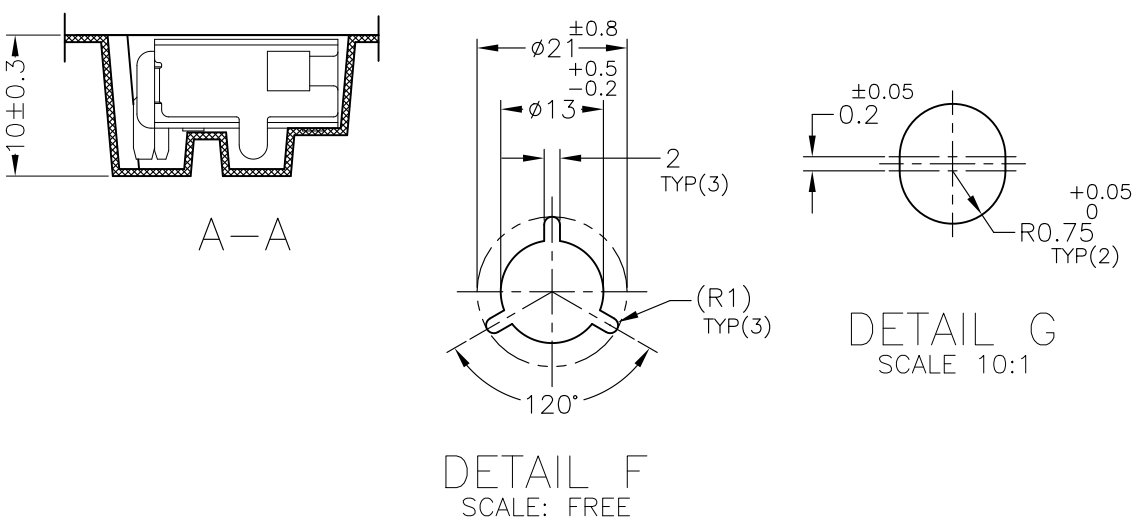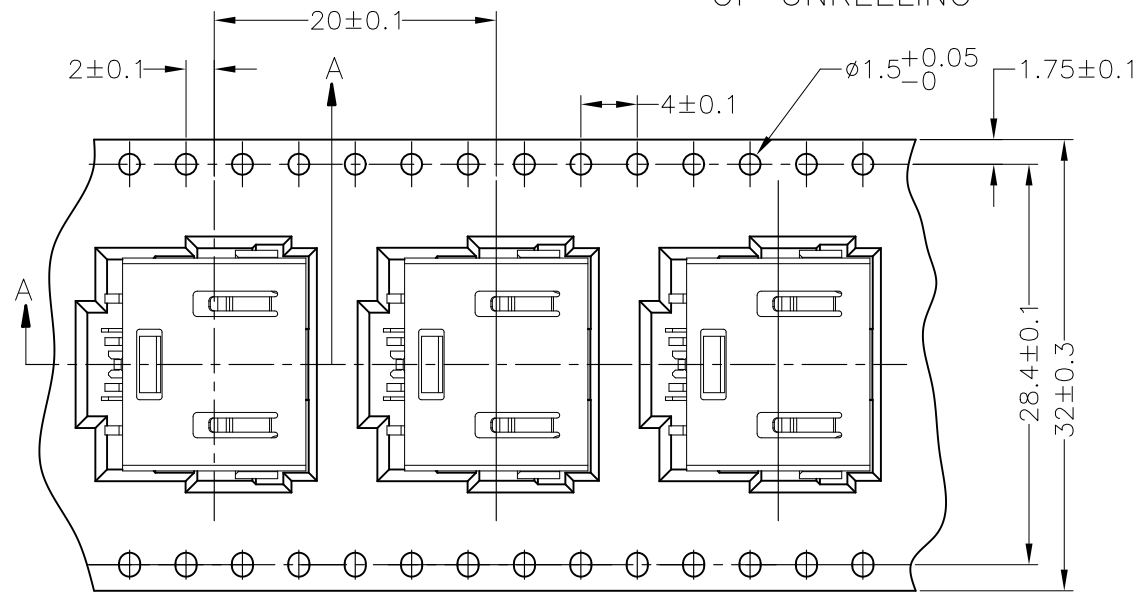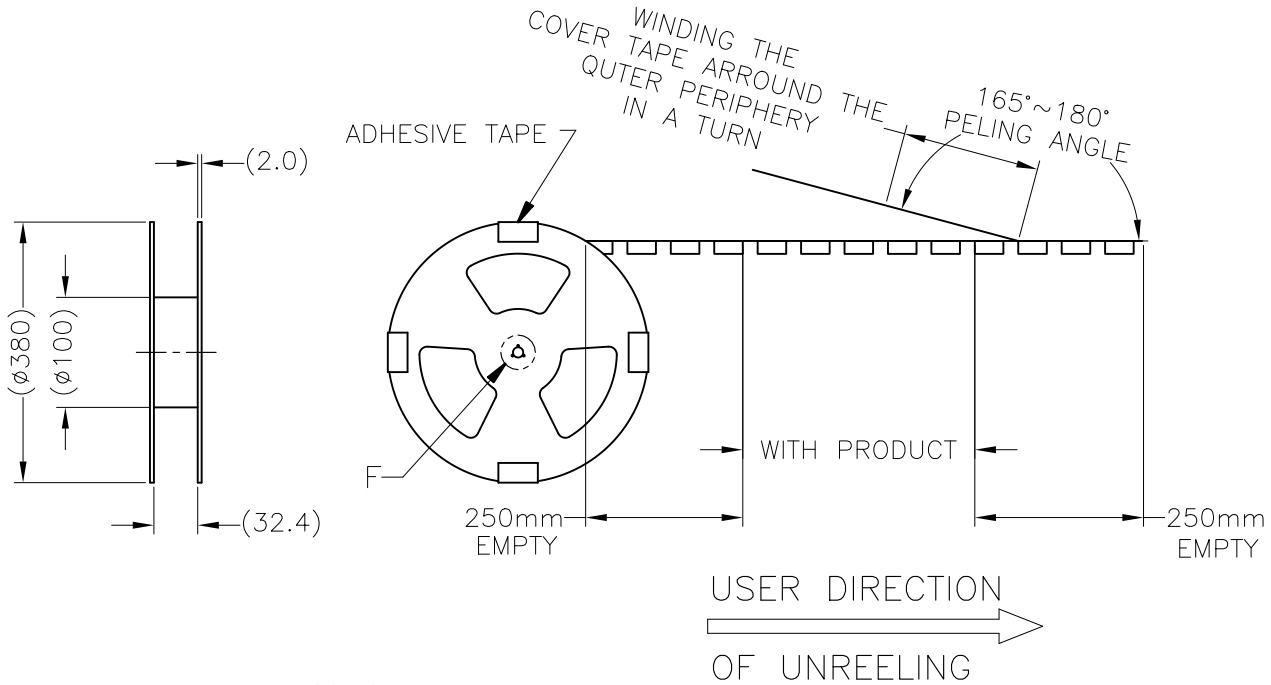

4. SHIPPING BOX DIMENSION: 445mmX445mmX270mm

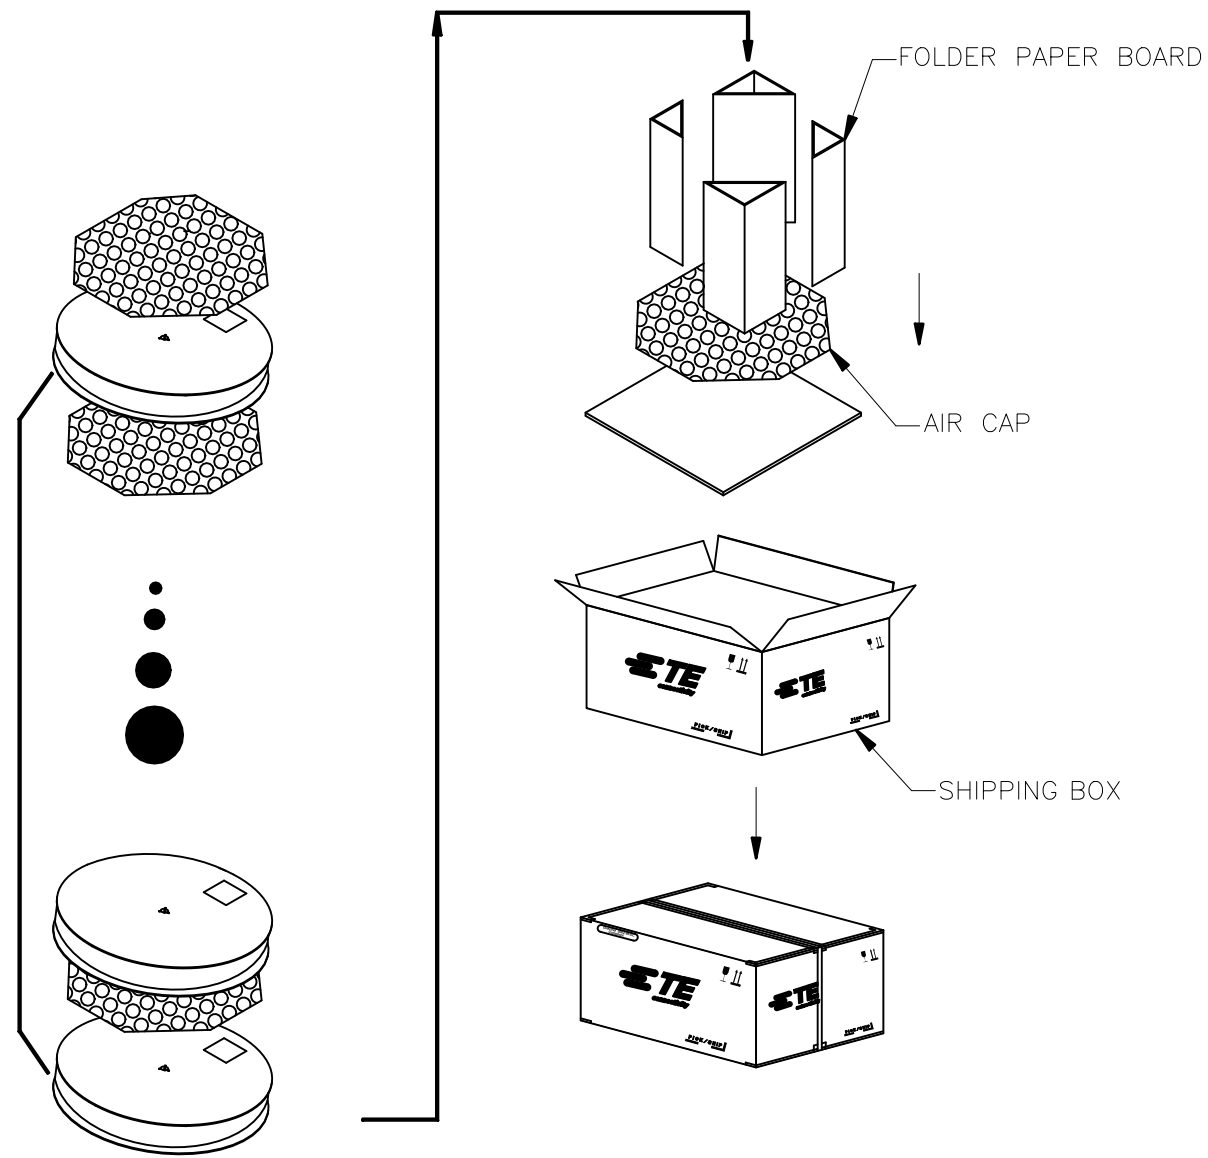

450	5	2250
PCS/REEL	REEL/SHIPPING BOX	TOTAL Q'TY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		CHK		APVD		PRODUCT SPEC		APPLICATION SPEC		WEIGHT		CUSTOMER DRAWING		SCALE		SHEET		REV	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		MATERIAL		FINISH		NA		3 OF 3	
mm		±0.25		TE Connectivity		A3		00779		C=2129458		-		-		-		-		B2	
0-PLC		±		DC POWER JACK CONNECTOR		-		-		-		-		-		-		-		-	
1-PLC		±		DIP TYPE (10.7A)		-		-		-		-		-		-		-		-	
2-PLC		±		-		-		-		-		-		-		-		-		-	
3-PLC		±		-		-		-		-		-		-		-		-		-	
4-PLC		±		-		-		-		-		-		-		-		-		-	
ANGLES		±		-		-		-		-		-		-		-		-		-	
R0.75		±0.05		-		-		-		-		-		-		-		-		-	
TYP(2)		±0.05		-		-		-		-		-		-		-		-		-	
TYP(3)		±0.05		-		-		-		-		-		-		-		-		-	
TYP(3)		±0.05		-		-		-		-		-		-		-		-		-	
TYP(3)		±0.05		-		-		-		-		-		-		-		-		-	