

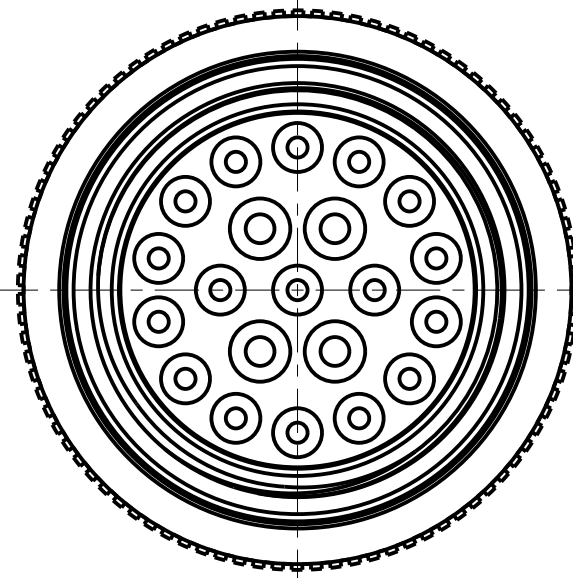


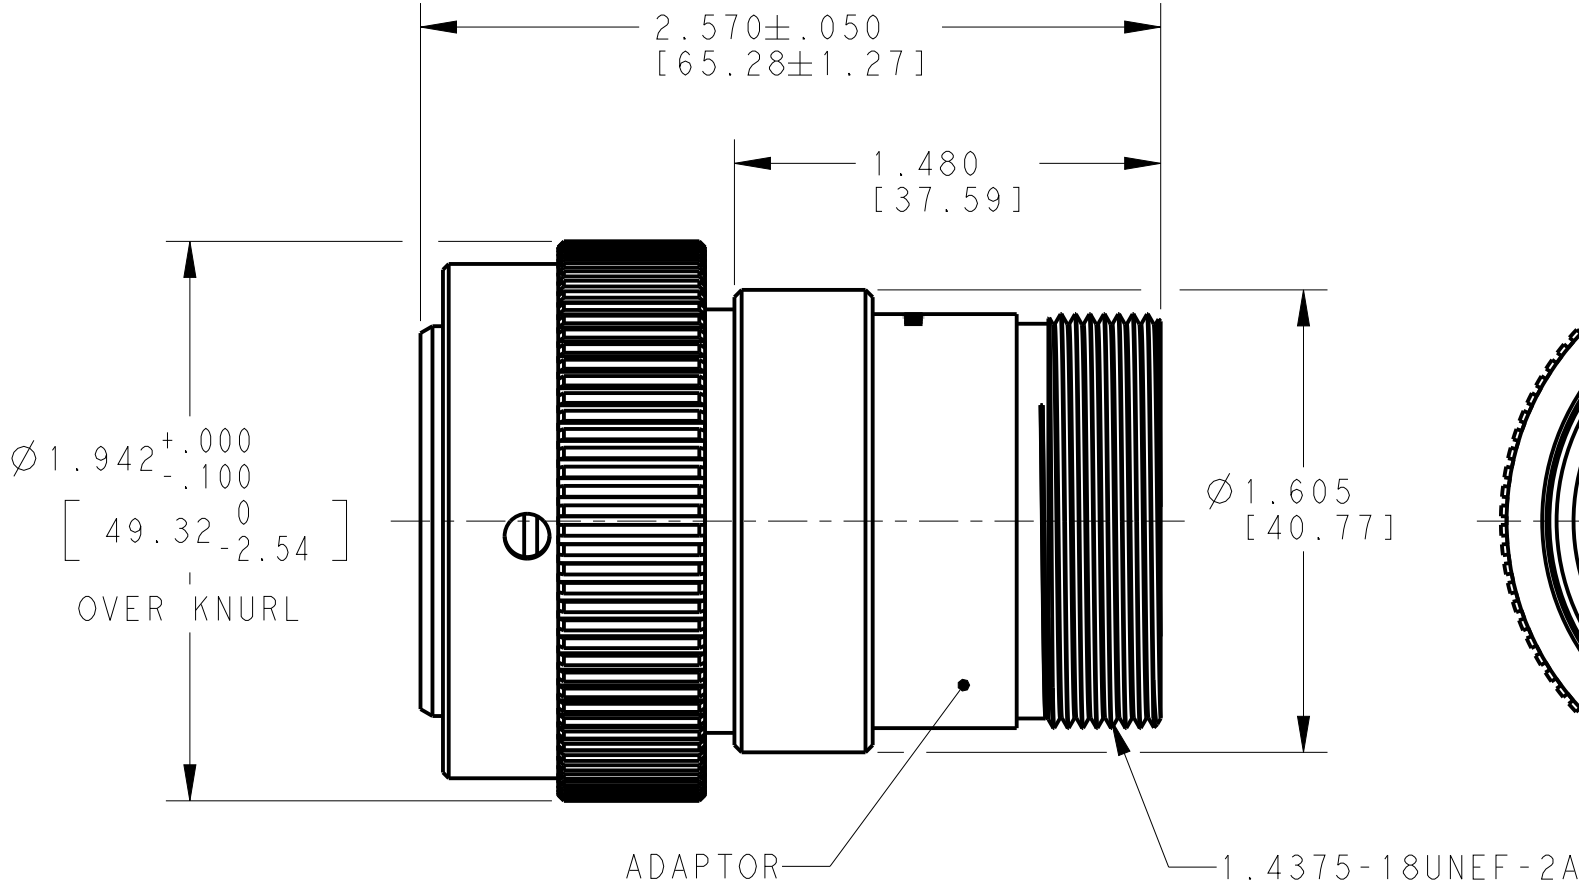

MAIN POLARIZING KEY

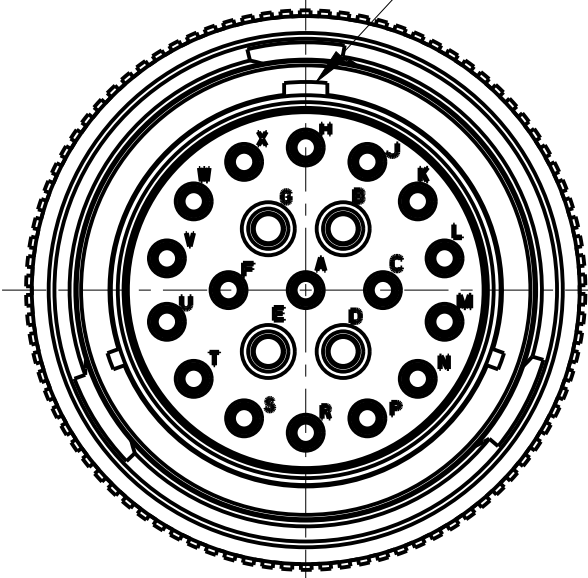

- 6 MATERIAL: SHELL, COUPLING RING AND ADAPTOR: ALUMINUM ALLOY 6061-T6, SEAL: SILICONE MQ.
5. FOR ARRANGEMENT OF CONTACT LOCATION SEE ENVELOPE DWG 0425-014-2400.
4. FOR CONNECTOR PERFORMANCE AND APPLICATION INFORMATION, SEE DRAWING NUMBER 0425-016-0000.
3. THIS CONNECTOR MATES WITH PART NO. HD34-24-XXS/PX-XXXX. XX= NUMBER OF CAVITIES, X= TYPE OF SEAL, XXXX= ALL MODIFICATION.
2. 21 PIN ARRANGEMENT SHOWN FOR REFERENCE ONLY.
1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES[mm]

MATERIAL

6

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±.025 [.63]
4 PLC	±
ANGLES	±0°30'0"
FINISH	N/A

DWN
JAIME C. APOSTOL

CHK
ILINA GRANTCHAROVA

APVD
DAVID MEYER

PRODUCT SPEC
N/A

APPLICATION SPEC
N/A

WEIGHT
N/A

Customer Drawing

TE Connectivity

NAME
PLUG CONNECTOR SIZE 24
BAYONET COUPLING -L005 MOD
HD SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	HD36-24-XXP/SX-L005	-

SCALE 3:2 SHEET 1 OF 1 REV A