



## TOP VIEW

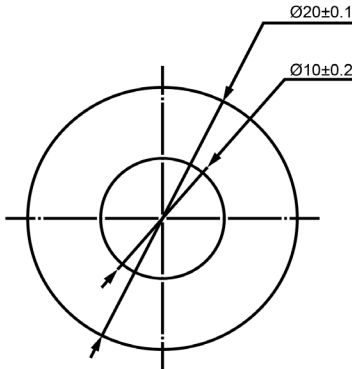

## SIDE VIEW

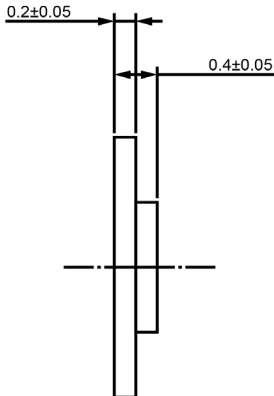

| Specifications           |                 |       | Notes                                                                        | Revision History |                           |            |            |             |            |
|--------------------------|-----------------|-------|------------------------------------------------------------------------------|------------------|---------------------------|------------|------------|-------------|------------|
| Description              | Value           | Unit  |                                                                              | Version          | Description               |            | Date       | Approved    |            |
| Resonant Frequency       | 6,400           | (Hz)  | 1) All dimensions are in mm unless otherwise noted<br>2) All parts meet RoHS | 1                | Released from Engineering |            | 10/21/2013 | J.S         |            |
| Resonant Impedance (Max) | 400             | (Ohm) |                                                                              |                  |                           |            |            |             |            |
| Max Input Voltage        | 30              | (V)   |                                                                              |                  |                           |            |            |             |            |
| Capacitance              | 6,000           | (pF)  |                                                                              |                  |                           |            |            |             |            |
| Plate Material           | Stainless Steel |       |                                                                              |                  |                           |            |            |             |            |
| Operating Temperature    | -20 ~ +60       | °C    |                                                                              |                  |                           |            |            |             |            |
| Storage Temperature      | -20 ~ +70       | °C    |                                                                              |                  |                           |            |            |             |            |
|                          |                 |       |                                                                              |                  |                           |            |            |             |            |
|                          |                 |       |                                                                              |                  |                           |            |            |             |            |
|                          |                 |       |                                                                              |                  |                           |            |            |             |            |
|                          |                 |       |                                                                              | Drawn by         | Date                      | Checked by | Date       | Approved by | Date       |
|                          |                 |       |                                                                              | A.B.             | 10/21/2013                | C.E.       | 10/21/2013 | J.S         | 10/21/2013 |
|                          |                 |       |                                                                              | Piezo Bender     |                           |            | P20064-1   |             |            |