


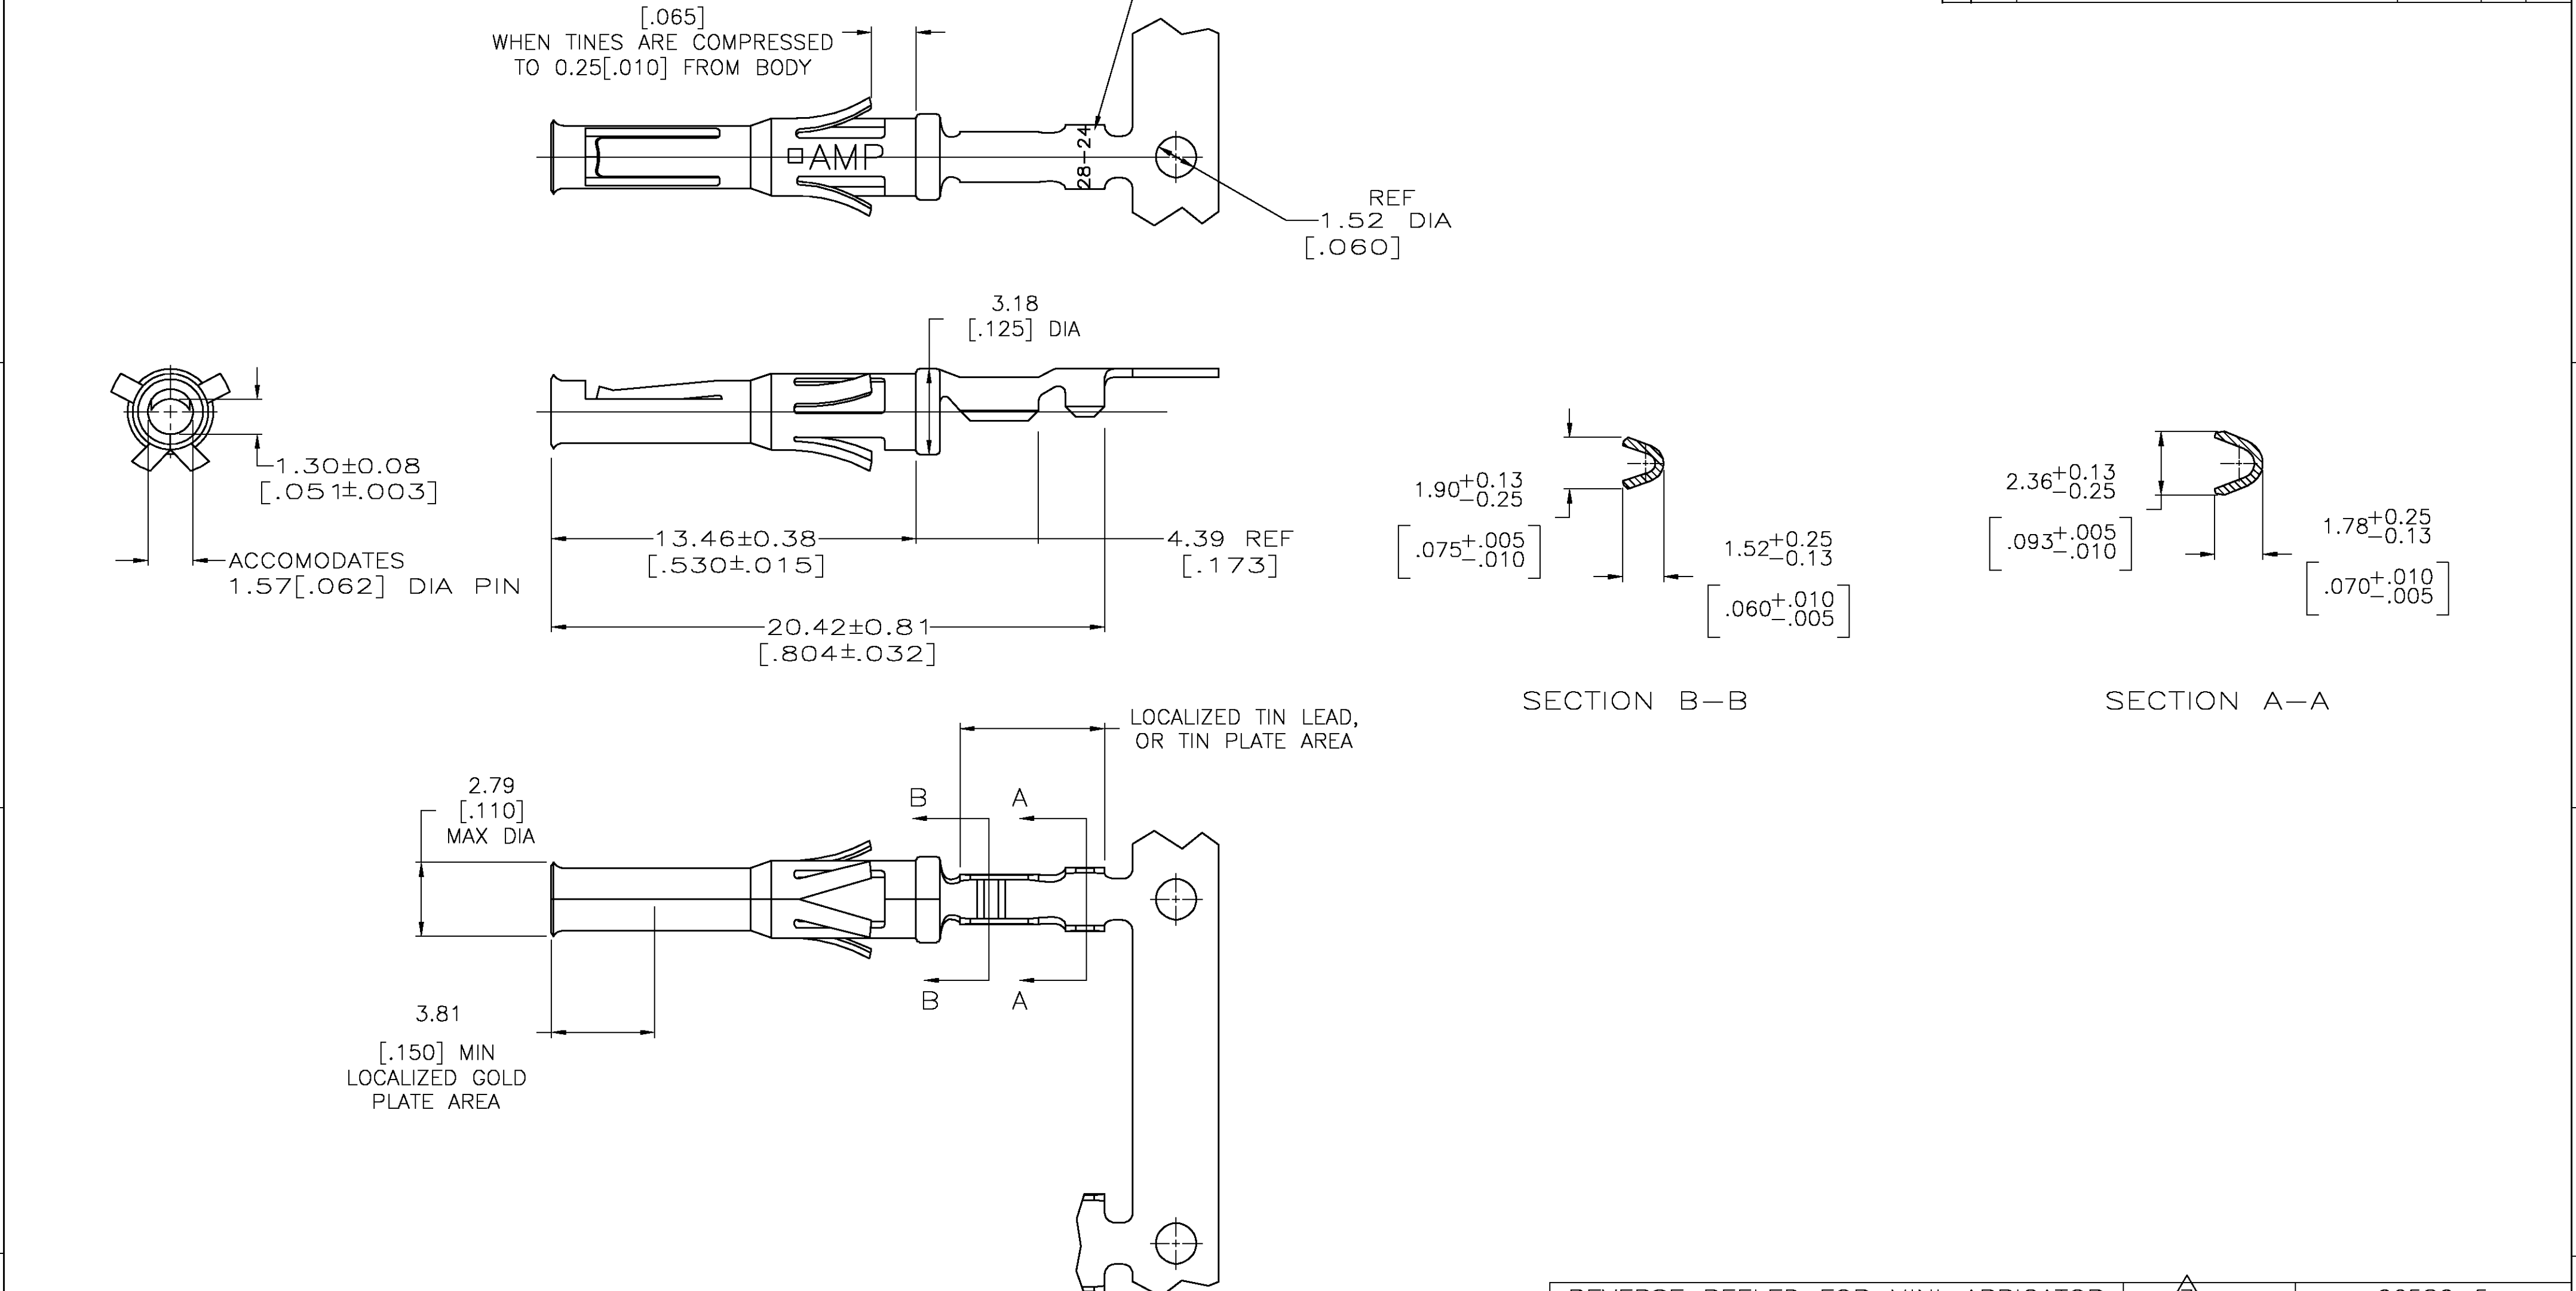

1. WIRE RANGE 28-24 AWG.
2. INSULATION RANGE 0.89-1.40[.035-.055] DIA.
3. FOR LOOSE PIECE PART SEE DWG 66596.
- 4 0.76um [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27um [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 TIN PLATED.
- 6 GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
- 7 0.76um [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27um [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27um [.000050] MIN NICKEL.

	REVERSE REELED FOR MINI-APPICATOR	7	66586-5
	REVERSE REELED FOR MINI-APPICATOR	4	66586-4
	-	4	66586-3
OBSOLETE	REVERSE REELED FOR MINI-APPICATOR	5	66586-2
OBSOLETE	-	5	66586-1
DESCRIPTION		FINISH	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94 CHK R.STONE 06/22/94 APVD -	NAME Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC -	APPLICATION SPEC -
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	WEIGHT -	SIZE A2
MATERIAL BRASS PER MIL-C-50	SEE TABLE 6	CAGE CODE 00779	DRAWING NO C=66586
CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 1
		REV F	RESTRICTED TO -