
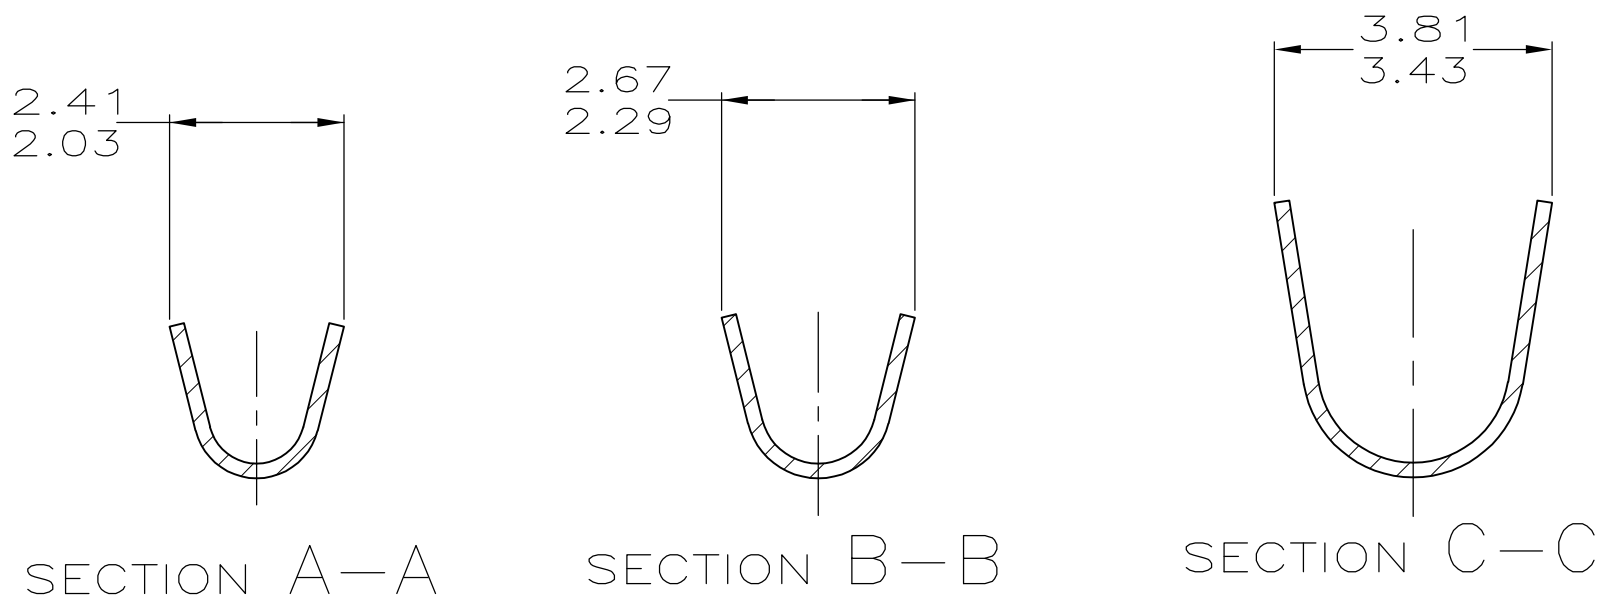
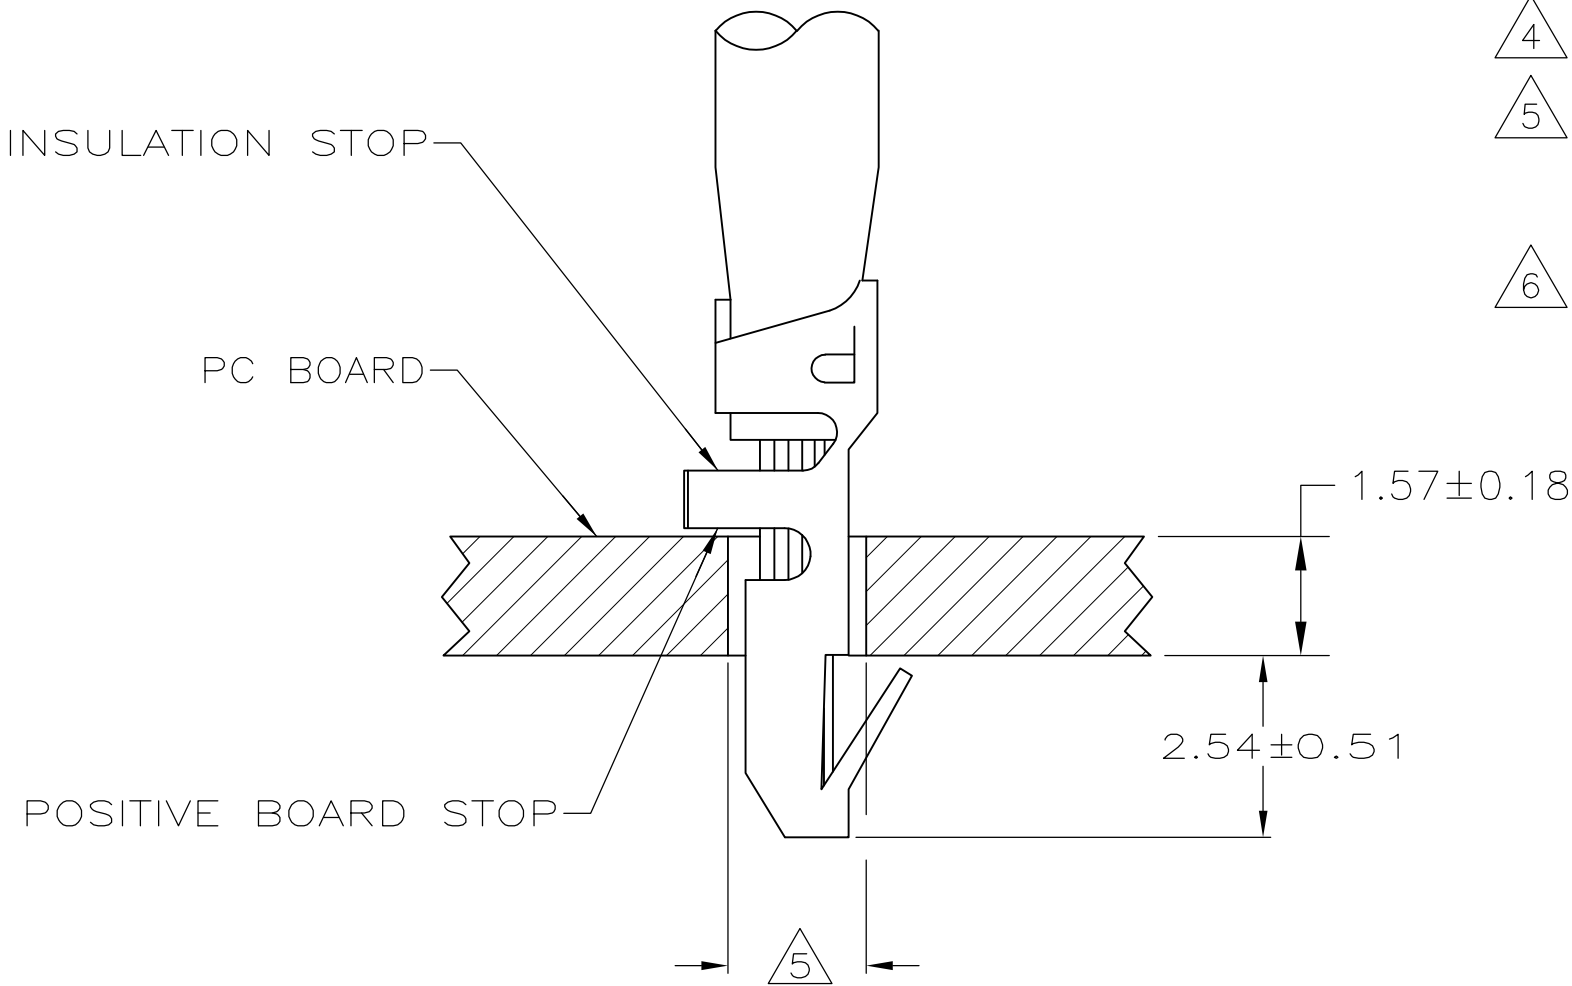
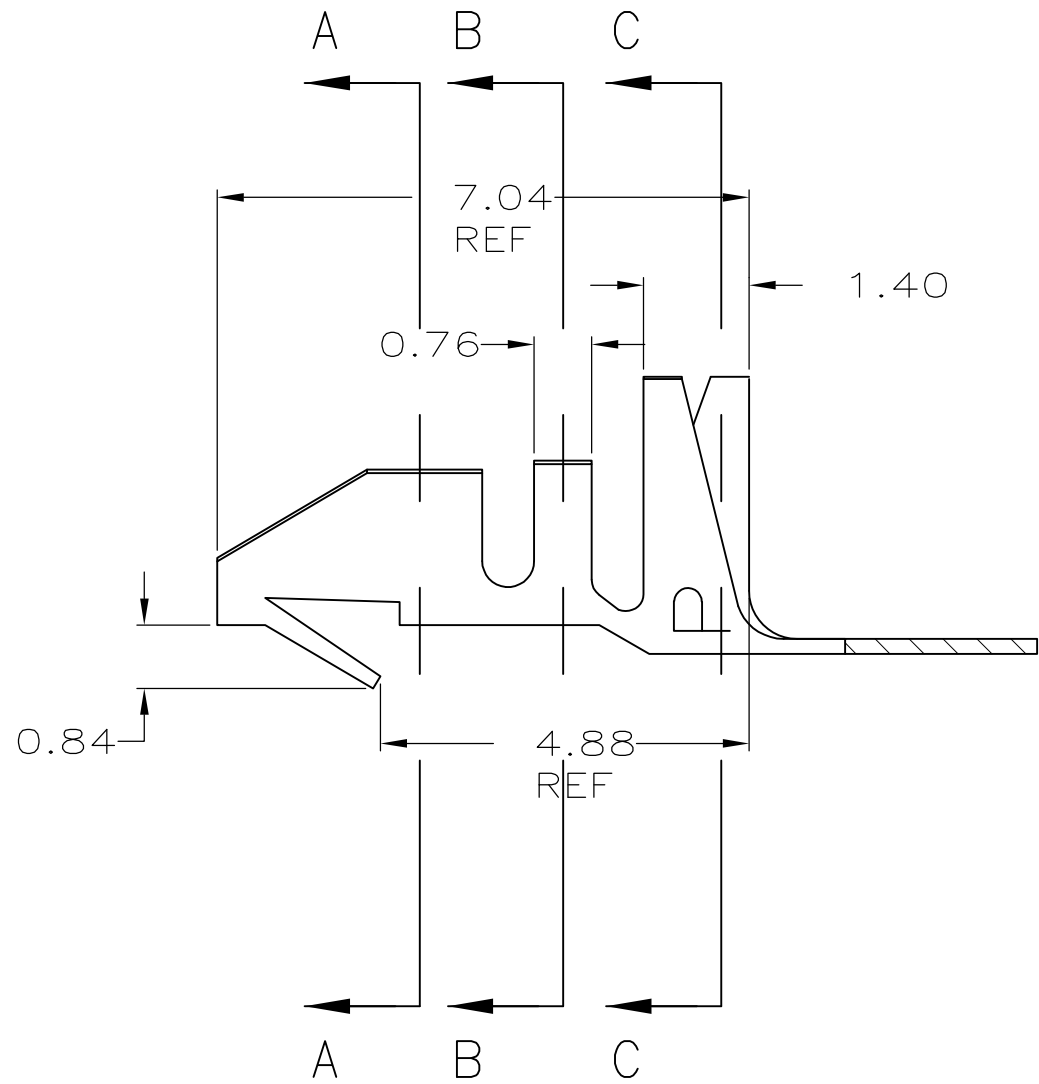


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	00		C2	REVISED PER ECO-12-014997	23AUG12	KH
						SM

- 1 PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-2.
- 2 WIRE RANGE: 0.3 - 0.9 MM² (22 - 18 AWG).
- 3 INSULATION RANGE: 1.52 - 2.79
- 4 0.00508 MIN BRIGHT TIN-LEAD.
- 5 HOLE DIAMETER TO BE 1.83±0.08 FOR WIRE 0.3 - 0.6 MM² (20 - 22 AWG) OR 1.96±0.08 FOR WIRE 0.8 - 0.9 MM² (18 AWG).
- 6 0.00508 MIN BRIGHT TIN.

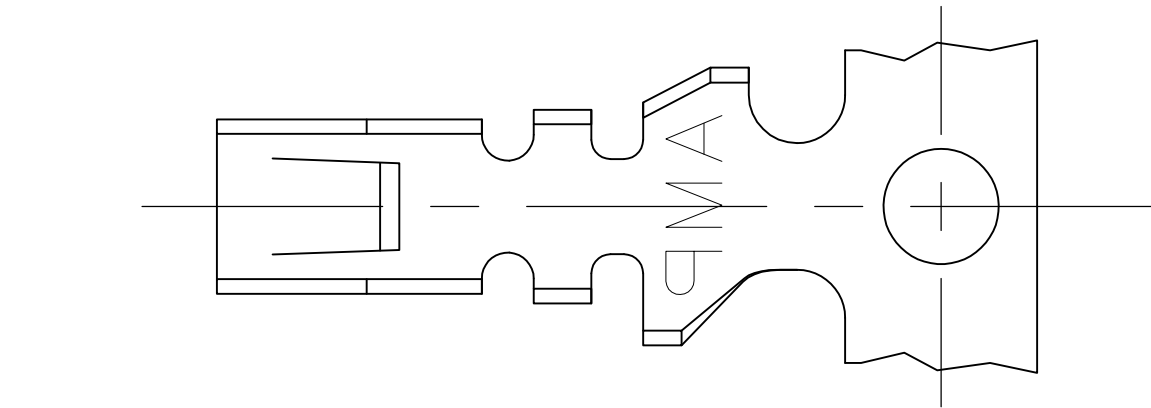

0.51	.020	1.52	.060	2.54	.100	-	-
0.3	.01	1.40	.055	2.41	.095	7.04	.277
0.20	.008	0.9	.04	2.29	.090	4.88	.192
0.18	.007	0.84	.033	2.03	.080	3.81	.150
0.13	.005	0.8	.03	1.96	.077	3.43	.135
0.08	.003	0.76	.030	1.83	.072	2.79	.110
0.00508	.000200	0.6	.02	1.57	.062	2.67	.105
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
0.20 PH BRZ

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ± 0.13
3 PLC ±
4 PLC ±
ANGLES ±
FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S. CARPENTER 21AUG2003
CHK J. ELLIS 21AUG2003
APVD J. ELLIS 21AUG2003
PRODUCT SPEC 108-1081
APPLICATION SPEC 114-1016
WEIGHT
CUSTOMER DRAWING

TE Connectivity

NAME
TERMINAL, MINI AMP-IN™ 2000

SIZE A2
CAGE CODE 00779
DRAWING NO C-794121
RESTRICTED TO -
REV C2

SUPERSEDED BY
3-794121-1

FINISH

3-794121-1

PART NO.

SCALE 10:1

SHEET 1 of 1