


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,76]	W ± .01 [0,25]	C ± .02 [0,51]	M ± .03 [0,76]	H ± .01 [0,25]
E10-6RB	#6	M3	.78 [19,8]	.31 [7,9]	.31 [7,9]	.62 [15,8]	.15 [3,8]
E10-8RB	#8	M4	.78 [19,8]	.31 [7,9]	.31 [7,9]	.62 [15,8]	.17 [4,3]
E10-10RB	#10	M5	.81 [20,6]	.38 [9,7]	.31 [7,9]	.62 [15,8]	.20 [5,1]
E10-14RB	1/4"	M6	.96 [24,4]	.52 [13,2]	.38 [9,7]	.70 [17,8]	.27 [6,9]

NOTES ::


1. USED FOR:
 - A. 12-10 AWG [4,0-6,0 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 302°F [150°C] MAX. TEMP. RATING
 - C. 2000V MAX VOLTAGE
2. MATERIAL:
 - A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED
3. INSTALLATION TOOLS:
 - A. UL LISTED AND CSA CERTIFIED:
 - CT-100A, CT-200, CT-600-A (CT-570CH)
 - CT-1570, CT-1701, CT-2500 (CT-2570CH)
 - B. PANDUIT APPROVED: CT-160, CT-260
4. WIRE STRIP LENGTH: 9/32" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

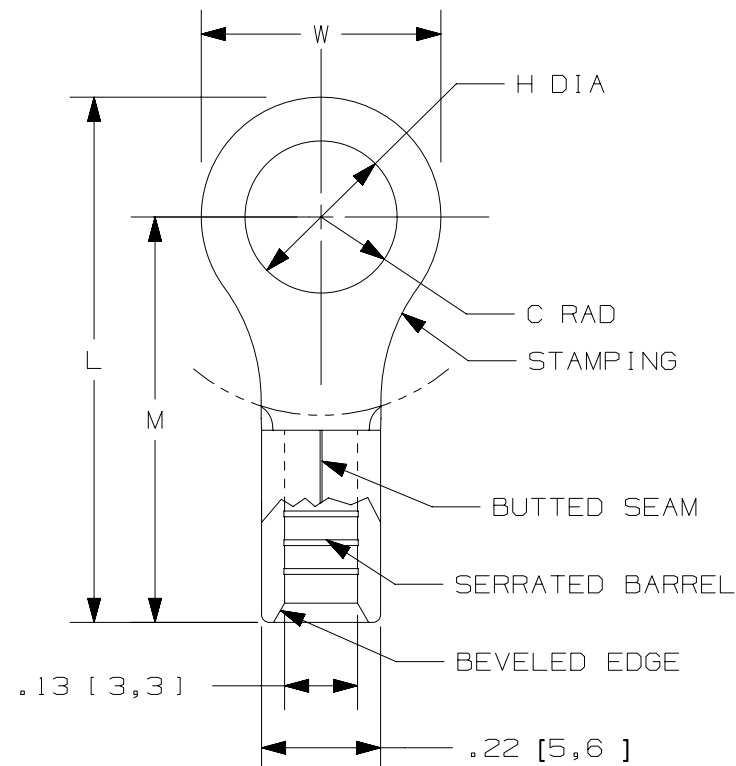

LISTED
587H
E52164



CERTIFIED
LR31212

											TITLE				STRONGHOLD RING TERMINALS NON-INSULATED, BUTTED SEAM #12-10 AWG				
												CUSTOMER DRAWING							
												ITEM REVISION NAME		00123STC/00					
												DATASET FILE NAME		00123STC_DC/00					
												UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL:			
												.X ± .1 [2.54] .XXX ± .005 [.13] .XX ± .01 [.25] ANGLES ± 5 °				SEE NOTES			
												 THIRD ANGLE PROJECTION				DRAWING NUMBER: SH41188			
00	2/18	JHNU	TMR	RGB	RELEASED							DRAWN BY	DATE	CHK	SCALE				
												JHNU	2/18	TMR	N.T.S.		SHEET 1 OF 1	A	
REV	DATE	BY	CHK	APR	DESCRIPTION						ECN								