


Series 800

PCB connectors 2.54 mm

Single row / double row


Wire-wrap / solder tail

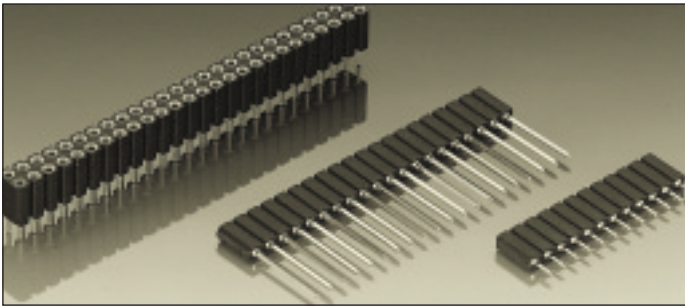

PCB receptacles with wire-wrap posts


Accept square pins $\square$ 0.635 mm
and round pins $\varnothing$ 0.70–0.80 mm


For corresponding pin connectors see pages
30 to 35



Receptacles, solder tail


for pins $\varnothing$ 0.95–1.05 mm



Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-10-004
for a double row version with 8 pins per row becomes:
803-91-**016**-10-004

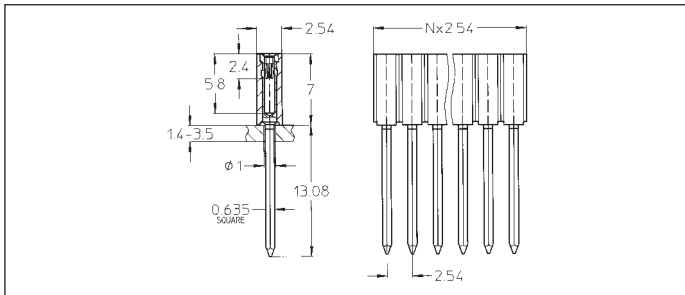


801-91-xxx-53-001 **B**

801-93-xxx-53-001

Wire-wrap receptacle: single row,
3 levels

Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48, 50

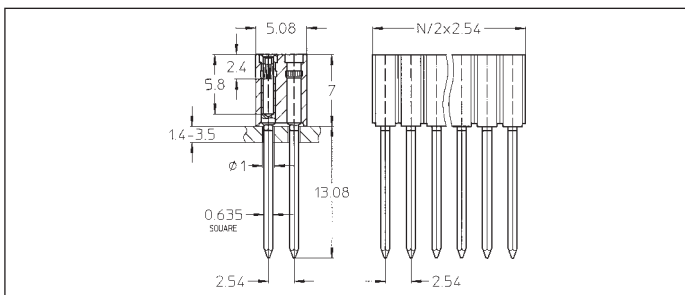


803-91-xxx-53-001 **B**

803-93-xxx-53-001

Wire-wrap receptacle: double
row, 3 levels

Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100

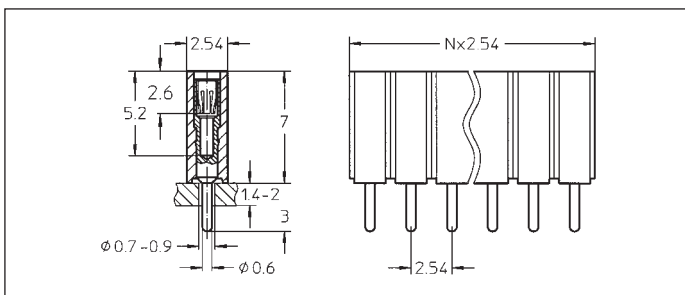


801-91-xxx-10-004

801-93-xxx-10-004

801-99-xxx-10-004

Straight receptacle: single row,
accepts pin
 $\varnothing$ 0.95–1.05 mm

Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48, 50

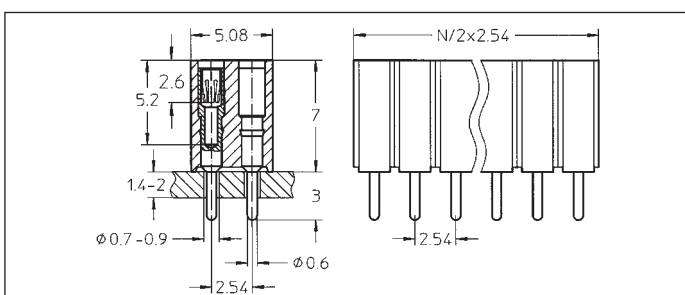

803-91-xxx-10-004

803-93-xxx-10-004

803-99-xxx-10-004

Straight receptacle: double row,
accepts pin
 $\varnothing$ 0.95–1.05 mm

Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100