

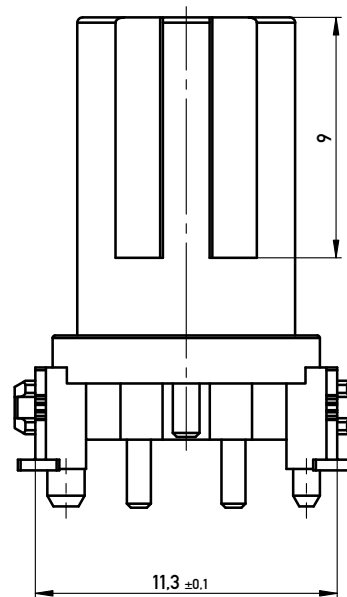
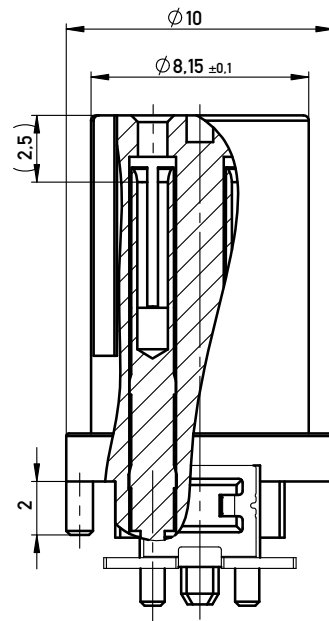
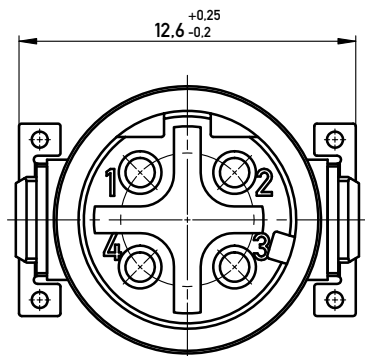
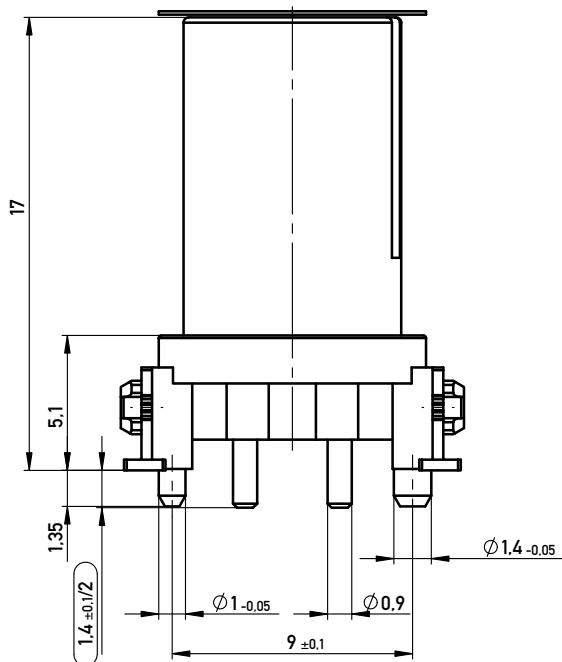
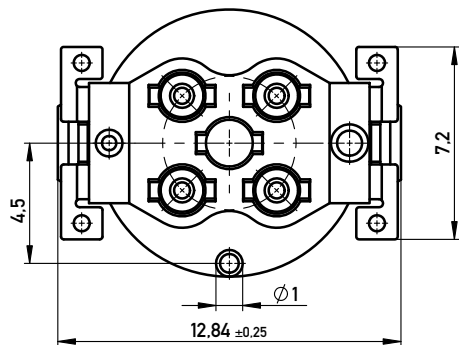




Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 100 Stück
Packaging unit: 100 pcs



Layout - Vorschlag

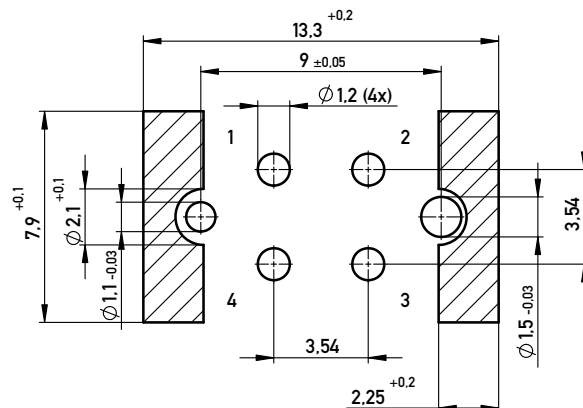

Koplanarität aller Clip $\leq 0.1\text{mm}$
coplanarity of all clips $\leq 0.1\text{mm}$

SPC-Maß: Prüfmerkmale der Kategorie /1

/1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung

Prüfmerkmal: Prüfmerkmale der Kategorie /2 und /3

/2 Für Prüfmerkmale muss eine x/s Regelkarte geführt werden

/3 Prüfmerkmale werden serienbegleitend geprüft

	4 Pol.	Tray
484944	4 Pol.	Gurtverpackung mit Pad / Tape on Reel with Pad Packaging
	4 Pol.	Schüttgut
Ident-Nr.	Typ	Bemerkung

Information:				Tolerances		 All Dimensions in mm		Scale		5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation			
								Federleiste M12 D Cod. <i>4 polig 17mm Typ THR V 1,4mm GT7</i>			
						www.ERNI.com		484945			
Index		Date						A3			
								Class M12			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[484944](#)