

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0764505108

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 2 Pair Right Angle Male Header, Right Guided, Open Endwall, 10 Columns, 60 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

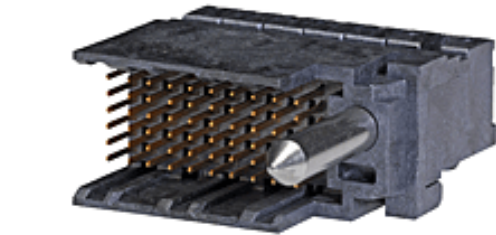

Series image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-76060-999 \(PDF\)](#)
- [Application Specification AS-76060-990 \(PDF\)](#)
- [Application Specification AS-76060-9999 \(PDF\)](#)
- [Packaging Specification PK-70873-077 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Application Tooling Documents

Component Type

Overview

Product Name

UPC

Backplane Connectors

76450

Coplanar

TM-622018799

PCB Header

Impact™ Backplane Connector and Cable Assembly System

Impact™

884982654570

Physical

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Guide to Mating Part

Keying to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Columns

Number of Pairs

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Plating min - Mating

Polarized to PCB

Stackable

Temperature Range - Operating

Termination Interface: Style

60

60

Black

200

No

94V-0

Yes

None

High Performance Alloy (HPA)

Gold

Tin

High Temperature Thermoplastic

14.528/g

10

2

6

Right Angle

1.20mm

No

Yes

1.00mm

Tray

1.90mm

1.90mm

0.762µm

Yes

No

-55°C to +85°C

Through Hole - Compliant Pin

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/79/2015 (17
December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product
environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS
ELV

China RoHS

Green Image
Not Relevant

Search Parts in this Series

76450 Series

Mates With

76460 Impact™ 100 Ohm Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.

Global

Description

Product #

Impact™ Right Angle

Module Removal

Tool (RAM)

Press-in-Tool for

Daughter Card

Signal Module, 2-

0622024350

0622018778

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990, AS-76060-9999
Electrical Model Document	EE-76450-002, EE-76450-50G
Packaging Specification	PK-70873-077
Product Specification	PS-76060-999
S-Parameter Model	SP-76450-002, SP-76450-50G
Sales Drawing	SD-76450-004
Symbol/Footprint Data	SYM-76450-5108

Pair by 10-Column
Assemblies

This document was generated on 06/15/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION