
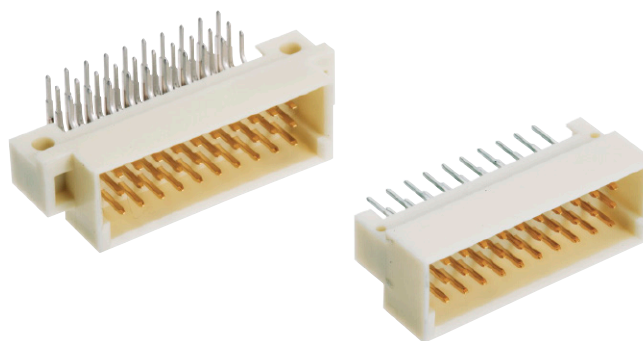










Number of contacts

30, 20



## Male connectors

| Identification                           | No. of contacts            | Contact arrangement   | Performance levels according to IEC 60 603-2. |  |                                |
|--|----------------------------|---|---|--|--------------------------------|
|  |                            |   | 3   | 2  | 1                              |
| Male connector with angled solder pins   |                            |   | Performance level 3 on request                |  | Performance level 1 on request |
|  | with fixing flange         |    |   | 09 25 130 6921<br>09 25 330 6921 <sup>b)</sup> |                                |
|  |                            |   |   |  |                                |
|  | 20                         |    |   | 09 25 120 6921                                 |                                |
|  |                            |   |   |  |                                |
|  | with fixing flange, THR    |    |   | 09 25 130 6919 <sup>d)</sup>                   |                                |
|  |                            |   |   |  |                                |
|  | without fixing flange      |    |   | 09 25 130 6571                                 |                                |
|  |                            |   |   |  |                                |
|  | without fixing flange, THR |  |   | 09 25 130 6579 <sup>d)</sup>                   |                                |
| Male connector with straight solder pins |                            |   |   |  |                                |
|  | with fixing flange         |  |   | 09 25 130 6922                                 |                                |
|  |                            |   |   |  |                                |
|  | 20                         |  |   | 09 25 120 6922                                 |                                |
|  |                            |   |   |  |                                |
|  | without fixing flange      |  |   | 09 25 130 6572                                 |                                |
|  |                            |   |   |  |                                |
|  | without fixing flange, THR |  |   | 09 25 130 6590 <sup>d)</sup>                   |                                |

Other contact arrangements as well with lagging/leading pins on request

<sup>b)</sup> Connectors with snap-in clips see chapter 00<sup>d)</sup> CTI > 400