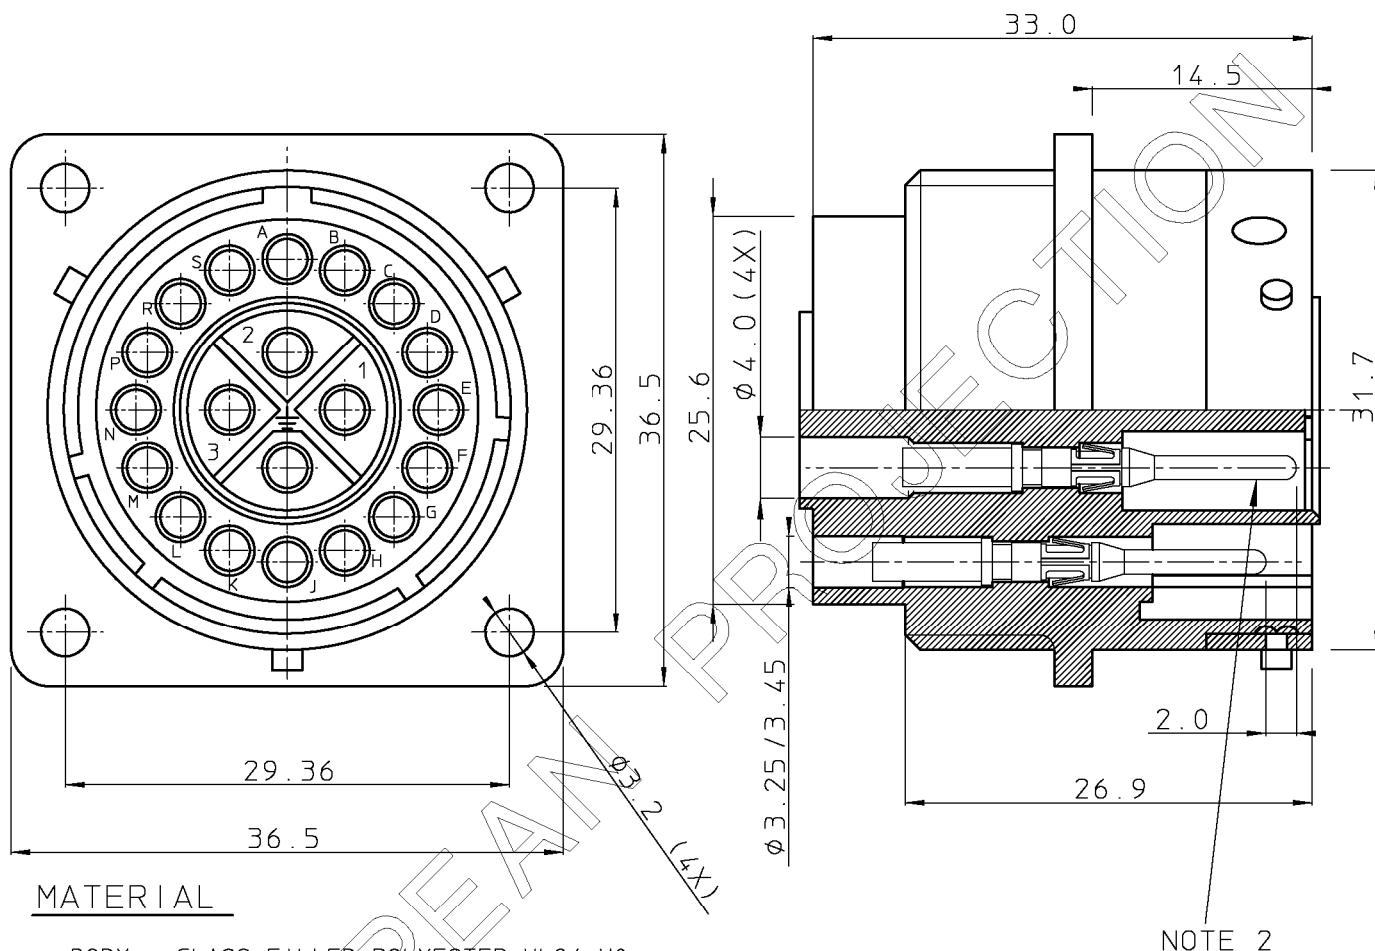


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C 'K' 'D'
01	10-09-90	DRAWING ADJUSTED	J.V.B.	
02	02-09-92	CAVITY DIAMETER ENLARGED	Y.D.	
03	07-11-95	B.E.C. 9.3289	K.N.	
04	10-03-99	Temperature range -55C instead of -25C	K.N.	



MATERIAL



- BODY : GLASS-FILLED POLYESTER UL94-V0.
COLOUR : BLACK.
- TRILOK RING : HIGH STRENGTH CuZn ALLOY, NICKEL PLATED.

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 MΩ MIN.
- TEST POTENTIAL : 2000 V EFF.
- 4 CONTACTS PER VDE 0110 CLASS 3-380V
CLASS 2-600V

NOTES

- 1 CONNECTOR ACCEPTS # 16 STRIP FORMED, MACHINED AND SUBMINIATURE COAXIAL
PIN AND SOCKET CONTACTS.
2 CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM-TRIO CATALOG.
3. FOR WATERPROTECTED VERSION : ADD "H" TO THE CATALOG NO. E.G. CAT. NO. : UTG02020PH

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN		APPR.		DATE		SIGN.		MALE RECEPTACLE METALOK BANTAM 20 POS.																							
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		DRAFT		06-04-89		E. CREELLE		CAT. No. UTG02020P																							
		CHECKED						 SOURIAU Route Nationale 23 72470 CHAMPAGNE												SCALE											
		PROD. MGR.																													
ALL DIMENSIONS IN MM		PR. ENG. MGR.						 SOURIAU Connection Technology																							
ALLE AFMETINGEN IN MM		PR. MGT. MGR.																													
		REFERENCES / REFERENTIES																													
		BS, A , 201052-001 04																													
		DRAWING NR. CUSTOMER DRAWING REVISION																													