| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|---|---|---|---|---|
| B | C180527 | 2018/12/22 | Mafei | Updated The Note. |







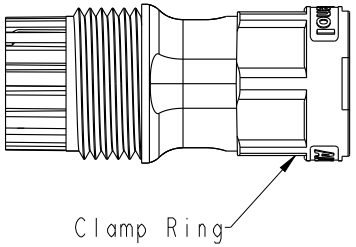





Material Specification:
- * Connector: Thermoplastic
- △B * Terminal: Copper Alloy, Silver Plated.
- * Seal & O-Ring: Rubber.
- * UL Rated: UL 94V-0, f1.
- * RoHS Compliant.

Electrical Specification:
- * Contact Resistance: 10mΩ Max.
- * Insulation Resistance: 100MΩ Min.
- * Dielectric Withstand Voltage: 1,600 Vac.

Mechanical Specification:
- * Durability: 1000 Cycles.
- * Wire conductor: 14AWG~12AWG(2.0mm^2~3.3mm^2).
- * Wire insulation OD: Max 4.0mm.
- * Torque Force for Clamp Ring: 6~8 kgf-cm
- * Torque Force for Seal Nut: 8~15 kgf-cm
- * Torque Force for Screw: 4~5 kgf-cm

Environmental Specification:
- * Waterproof Rating: IP67
- * Temperature Range: -40°C to 105°C.
- * Salt Spray: Mated, 500 Hours.

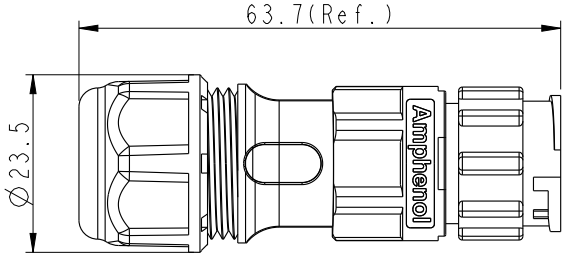


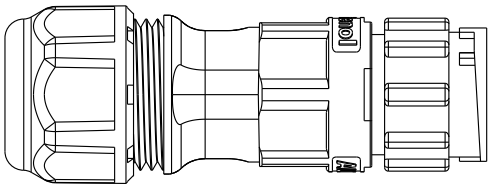




ALTW
CONFIDENTIAL
2018-12-22
R&D DEPT.

UNIT: mm

TOLERANCE
±0.5 mm

| | | | |
|---|---|---|---|
| TITLE: POWER Field Installable Cable Screw-in Type M Conn M Pin | | | |
| SCALE 8:5 | SIZE A4 | SHEET 1 OF 2 | |
| REV. B | WC-REV. A.3 | QC: Inspection item | |

**Amphenol LTW**
安費諾亮泰企業股份有限公司

| | | |
|---|---|---|
| ITEM NO | DRAWN BY: Mafei | DATE: 2018-12-22 |
| DWG NO: PWC-XXBMMB-LL7XPP | CHECKED BY: Jerry | DATE: 2018-12-22 |
| CUSTOMER: ALTW | APPROVED BY: Max | DATE: 2018-12-22 |

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



QTY: 1 Pcs

PE Bag



QTY: XX Pcs

Carton

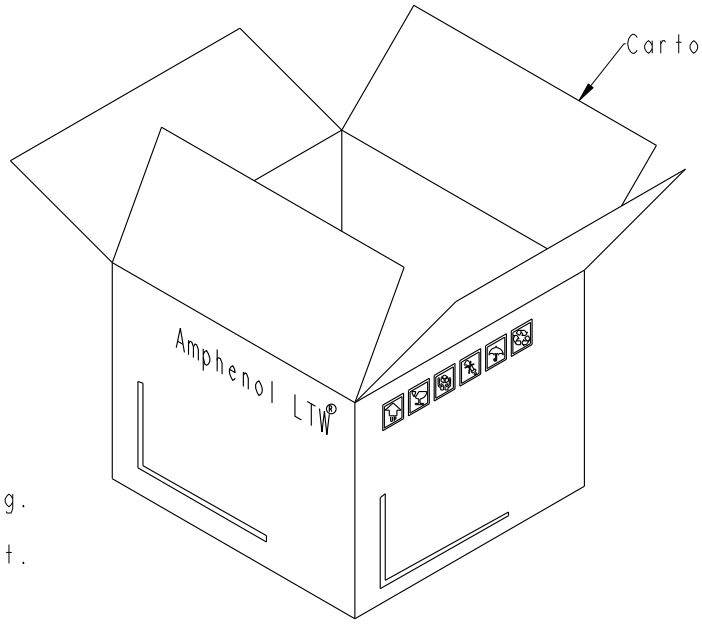


Ordering Information:

PWC-XXBMMB-LL7XPP

Number of Contacts
02
03

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1& Seal 2 & Seal 3.




20A ; 300Vac/Vdc
3 Contacts(03)

20A ; 300Vac/Vdc
2 Contacts(02)

Note:
* One Set Unassembled In One PE Bag.
（每一組未組裝，放置於一個PE袋，並封口，如圖示）
* Label is Attached To PE Bag Front.
（標籤貼在PE袋正面）

UNIT: mm

TOLERANCE
±0.5 mm

TITLE: POWER Field Installable Cable Screw-in Type M Conn M Pin

SCALE: 8:5 | SIZE: A4 | SHEET: 2 OF 2

REV.: B | WC-REV.: A.3 | QC: Inspection item

**Amphenol LTW**

**安費諾亮泰企業股份有限公司**

| ITEM NO | DRAWN BY | DATE |
|---|---|---|
| | Mafei | 2018-12-22 |
| DWG NO: PWC-XXBMMB-LL7XPP | CHECKED BY: Jerry | DATE: 2018-12-22 |
| CUSTOMER: ALTW | APPROVED BY: Max | DATE: 2018-12-22 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.