

INTERCHANGEABLE WALL PLUG POWER SUPPLY 5VDC 12.5WATT

T6634ST



Features:

- Interchangeable AC Heads
- 1 Year Warranty
- Level VI Efficiency
- Worldwide Approvals



Description:

The Stontronics range of 12.5 Watt Interchangeable wall plug power supplies provide 12.5 watts of continuous power with the flexibility of worldwide usage as they are supplied with USA fixed AC Head , all Efficiency Level VI and carry worldwide safety approvals.

Specification	
Part Code	T6634ST
Input Voltage Range	90-264 Vac
Input Frequency Range	47-63Hz
Input Current Rated	0.2A Max
Input AC Heads	UK, Euro, USA & Auz
Output Voltage Rating	+5V
Output Current Range	2.5A
Output Min Current	0A
Output Connection Type	2.1x5.5x12mm centre positive – straight
Total Output Regulation	+/- 5%
Line and Load Regulation	+/- 2%
Ripple & Noise	300mVp-p
Efficiency	79.03%Min
Over Voltage Protection	Auto-recovery
Over Load Protection	Auto-recovery
Operating Temperature	0 to 40°C
Storage Temperature	-20 to +60°C
Operating Humidity	20 to 85%
Storage Humidity	5 to 95%
Hi-Pot	3000VAC 10mA 1min
Leakage Current	0.25mA max
Safety Standard	UL
EMI Standard	CE (EN55022)
MTBF	50K Hours
Size mm max.	70 (L) 29 (W) 62H)
Weight	70 g

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | Stontronics Ltd
Chancerygate Business Centre, Cradock Road, Reading RG2 0AH, UK
t: +44 (0) 118 931 1199

INTERCHANGEABLE WALL PLUG POWER SUPPLY 5VDC 12.5WATT

T66345T



Diagrams

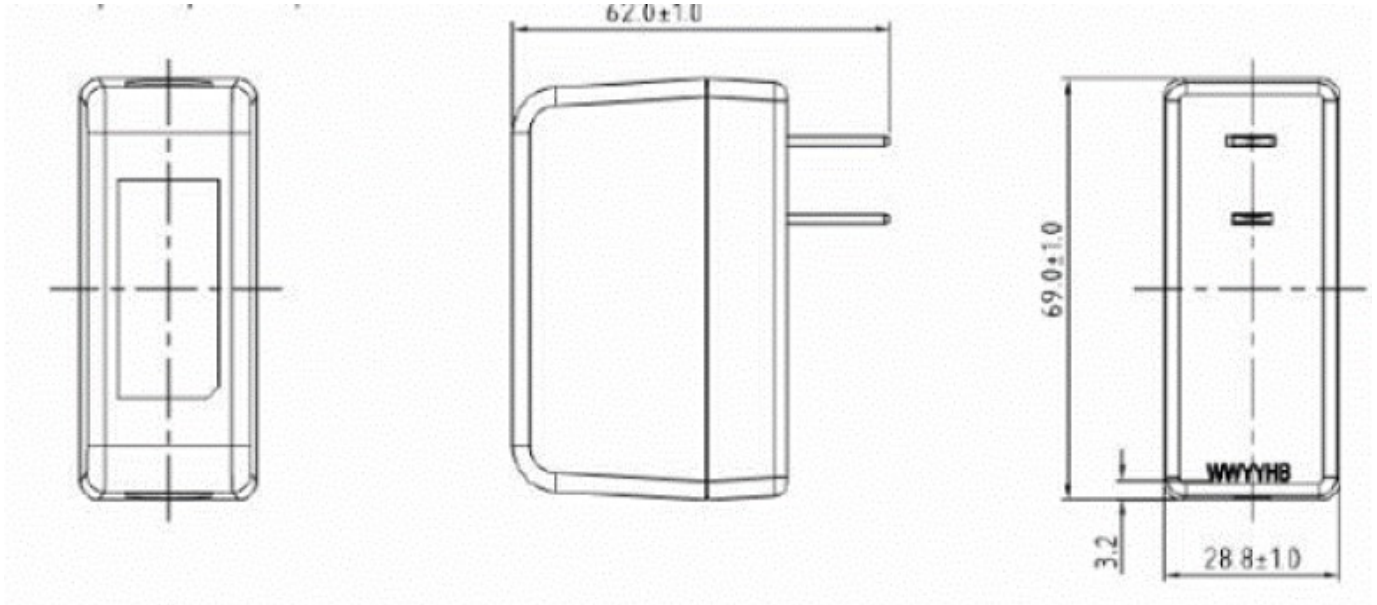

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

TT Electronics | Stontronics Ltd
Chancerygate Business Centre, Cradock Road, Reading RG2 0AH, UK
t: +44 (0) 118 931 1199

SL-004-110 ISS.0 23/11/2018 Page: 2