




SPECIFICATION FOR APPROVAL



TO: _____


PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	50TYT2
ORDER P/N.	50TYT2			SAMPLE ISSUE DATE	

1. PHYSICAL DIMENSIONS:

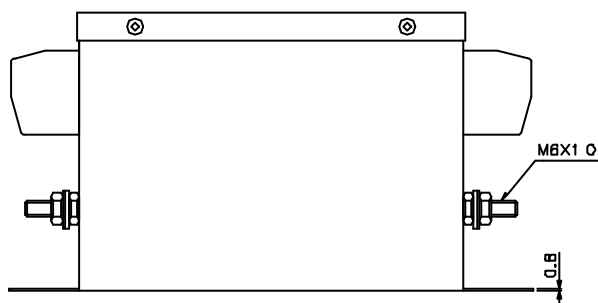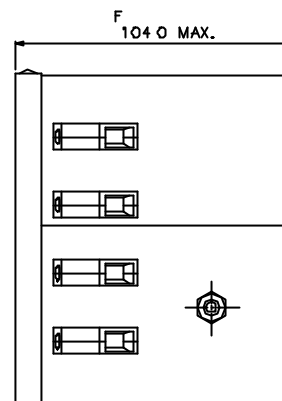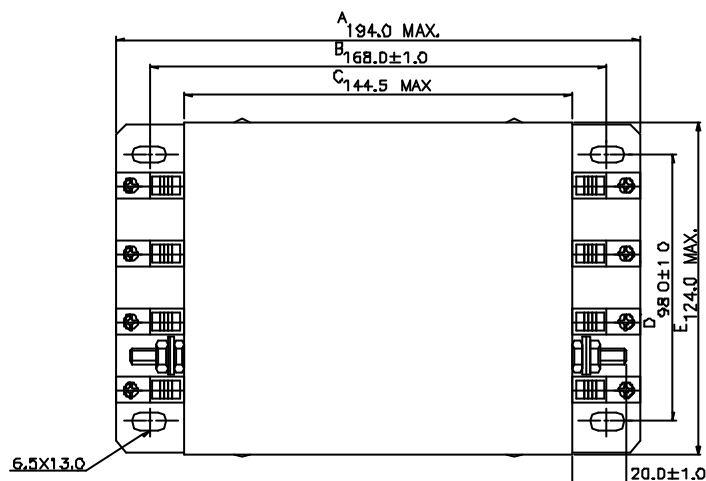

UNIT: mm

2. ELECTRICAL SCHEMATIC

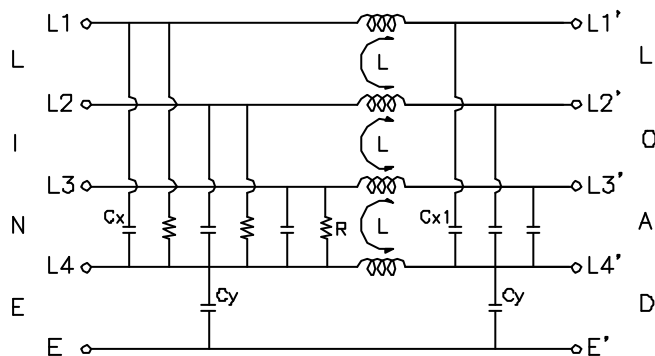

L: 0.55mH
 Cx: 2uF
 Cx1: 2uF
 Cy: 15nF
 R: 100KΩ

REPORT BY	CHECKED BY	APPROVED BY	3	
			2	
			REV.1	99.03.10

DELTA ELECTRONICS, INC.

9TH FL ASIA ENTERPRISE CENTER 144, SEG. 3 MIN.CHUAN E. ROAD
TAIPEI 10464, TAIWAN. R.O.C.

TELEX 26524 "DELTATRO"
 CABLE ADDRESS: "DELTATRO" TAIPEI
 TEL: (02) 7164822, 7167790
 "DELTATRO" TAIPEI

SPECIFICATION FOR APPROVAL



TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	50TYT2
ORDER P/N.	50TYT2			SAMPLE ISSUE DATE	

3. ELECTRICAL CHARACTERISTICS:

3-1. VOLTAGE RATING 440VAC

3-2. CURRENT RATING

A. AT 440VAC 50 A RMS Max.

3-3. OPERATING FREQUENCY..... 50/60 Hz

3-4. LEAKAGE CURRENT: EACH LINE TO GROUND

A. @440VAC 50Hz 3.0 mA Max.

3-5. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND 2250VDC

B. LINE TO LINE 1450VDC

3-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C

3-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	25	45	45	40	40	25
DIF. MODE dB	/	/	/	30	50	50	40	40	30

REV.		
	1. 99.03.10	

DELTA ELECTRONICS, INC.

9TH FL ASIA ENTERPRISE CENTER 144, SEC. 3 MIN.CHUAN E. ROAD
TAIPEI 10464, TAIWAN. R.O.C.

TELEX 26524 "DELTATRO"
CABLE ADDRESS: "DELTATRO" TAIPEI
TEL: (02) 7164822, 7167790
"DELTATRO" TAIPEI