

TABLE 1							
MODEL NUMBER	DESCRIPTION	AWG SIZE	No. OF COND	COND STRAND	LENGTH	FIG	COLOR CODE
65-TF224M	FLAT SILVER WIRE, 4C, 1000FT, NON-UL	28	4	7 X 36	1000FT	FIG 1	YELLOW, GREEN, RED, BLACK
65-TF226M	FLAT SILVER WIRE, 6C, 1000FT, NON-UL	28	6	7 X 36	1000FT	FIG 2	WHITE, BLACK, RED, GREEN, YELLOW, BLUE
65-TF228M	FLAT SILVER WIRE, 8C, 1000FT, NON-UL	28	8	7 X 36	1000FT	FIG 3	BLUE, ORANGE, BLACK, RED, GREEN, YELLOW, BROWN, WHITE



DESCRIPTION:

MODEL NUMBER:

APPLICATION:

CRIMP TOOL:

IMPEDANCE:

FREQUENCY RANGE:

MATERIAL:

FLAT SILVER WIRE, XC, 1000FT, NON-UL

65-TF22XM (SEE TABLE 1)

FLAT SILVER SATIN CABLE TELEPHONE AND COMPUTER

N/A

N/A

N/A

CONDUCTOR

INSULATOR

JACKET

COPPER CLAD AL

PP

PVC

RoHS COMPLIANCE:

TECHNICAL DETAIL:

YES

N/A

FIG 1

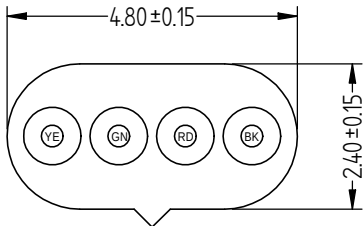


FIG 2


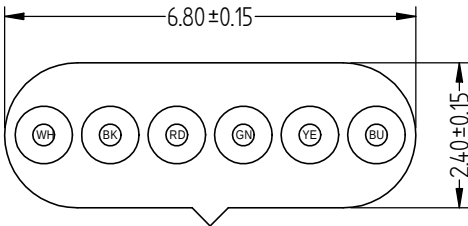


FIG 3

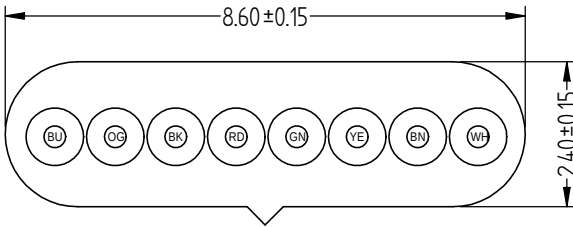

 This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	3RD ANGLE PROJECTION		AIM-Cambridge		
	RoHS ☒ 2002/95/EC		Title: FLAT SILVER WIRE, XC, 1000FT, NON-UL		
	.XX ±.51 .XXX ±.127 ANGLES ±2°		Model No. 65-TF22XM		
	Size A	DO NOT SCALE DRAWING	Date: 5/4/2013	Sheet 1 of 1	